


OIL ANALYSIS REPORT



NORMAL



LINE 11 EXTRUDER

Component Gearbox

MOBIL SHC 630 (25 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2020	Dec2020		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0533744	WC0457943	
Sample Date		Client Info		14 Dec 2020	23 Apr 2020	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	10	11	
Chromium	ppm	ASTM D5185m	>15	0	0	
Nickel	ppm	ASTM D5185m	>15	0	0	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	0	0	
Lead	ppm	ASTM D5185m	>100	0	0	
Copper	ppm	ASTM D5185m	>200	1	2	
Tin	ppm	ASTM D5185m	>25	0	0	
Antimony	ppm	ASTM D5185m		0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	1	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		0	0	
Calcium	ppm	ASTM D5185m		0	<1	
Phosphorus	ppm	ASTM D5185m		467	465	
Zinc	ppm	ASTM D5185m		0	7	
Sulfur	ppm	ASTM D5185m		1945	3010	
-	ppm	ASTM D5185m method	limit/base	1945 current	3010 history1	history2
Sulfur	ppm		limit/base >50			
Sulfur CONTAMINANTS		method		current	history1	history2
Sulfur CONTAMINANTS Silicon	ppm	method ASTM D5185m		current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045


0.917

1.032



OIL ANALYSIS REPORT

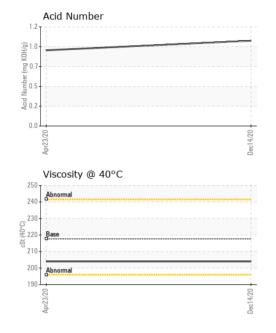

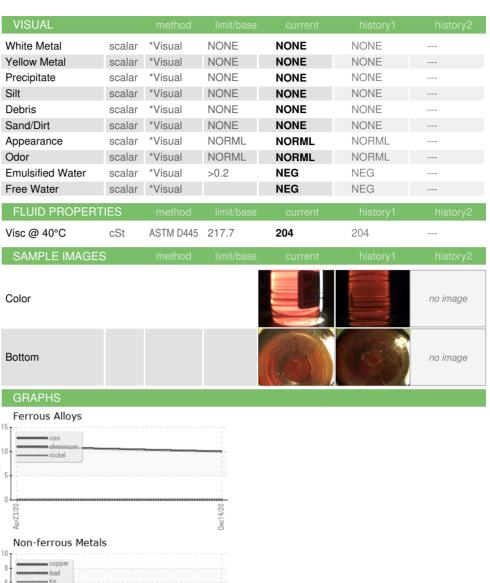





Certificate L2367

Laboratory Sample No. Unique Number : 9294701

Lab Number : 05139426

Test Package : IND 2

250

240 Ç 230 € 220

र्छ ₂₁₀

200 190

: WC0533744

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

: 17 Dec 2020 : 18 Dec 2020 : 18 Dec 2020 - Jonathan Hester Diagnosed

Dec14/20

Altium Packaging - WEST CHICAGO - DUPAGE - Plant 1123A

1300 NORTHWEST AVE WEST CHICAGO, IL US 60185

Contact: DALE HARRISON dale.harrison@altiumpkg.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Viscosity @ 40°C

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DALE HARRISON - CONSTR

Acid Number

(B/HQX) 1.0 1.0

£ 0.∶

~ 0.5 0.0 Acid Nu 0.0

T: x:

F: x: