




OIL ANALYSIS REPORT

Sample Rating Trend

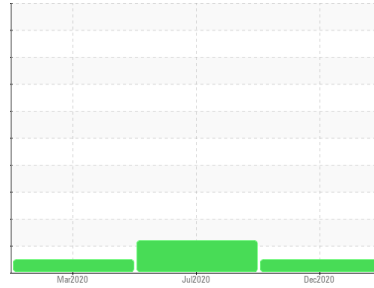

Machine Id
6608226 (S/N 1206)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KC92144	KC83388	KC72182
Sample Date	Client Info		05 Dec 2020	18 Jul 2020	14 Mar 2020
Machine Age	hrs Client Info		10367	7651	5132
Oil Age	hrs Client Info		2725	2351	1969
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>50	<1	<1	<1
Chromium	ppm ASTM D5185m	>10	0	0	0
Nickel	ppm ASTM D5185m	>3	0	0	0
Titanium	ppm ASTM D5185m	>3	0	0	0
Silver	ppm ASTM D5185m	>2	0	0	0
Aluminum	ppm ASTM D5185m	>10	0	<1	2
Lead	ppm ASTM D5185m	>10	0	<1	<1
Copper	ppm ASTM D5185m	>50	3	3	7
Tin	ppm ASTM D5185m	>10	0	<1	0
Antimony	ppm ASTM D5185m		0	0	0
Vanadium	ppm ASTM D5185m		0	0	0
Cadmium	ppm ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		0	<1	<1
Barium	ppm ASTM D5185m		0	0	0
Molybdenum	ppm ASTM D5185m		0	0	0
Manganese	ppm ASTM D5185m		0	0	<1
Magnesium	ppm ASTM D5185m		<1	0	0
Calcium	ppm ASTM D5185m		0	0	0
Phosphorus	ppm ASTM D5185m	500	152	14	116
Zinc	ppm ASTM D5185m		144	0	120

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	0	0	0
Sodium	ppm ASTM D5185m		<1	<1	0
Potassium	ppm ASTM D5185m	>20	0	<1	<1
Water	% ASTM D6304	>0.05	0.005	0.003	0.001
ppm Water	ppm ASTM D6304	>500	54.6	36.5	13.5






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		8325	17995	1904
Particles >6µm	ASTM D7647	>1300	1106	▲ 3896	381
Particles >14µm	ASTM D7647	>80	43	▲ 327	26
Particles >21µm	ASTM D7647	>20	14	▲ 97	9
Particles >38µm	ASTM D7647	>4	0	6	4
Particles >71µm	ASTM D7647	>3	0	0	3
Oil Cleanliness	ISO 4406 (c)	>--/17/13	17/13	▲ 19/16	16/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	1.5	0.453	0.256	0.413


OIL ANALYSIS REPORT

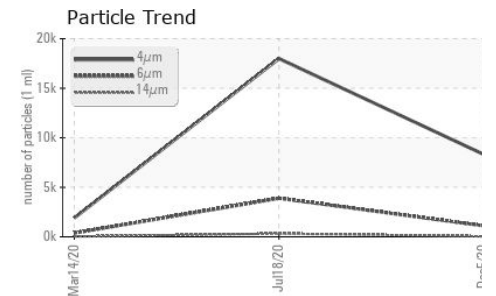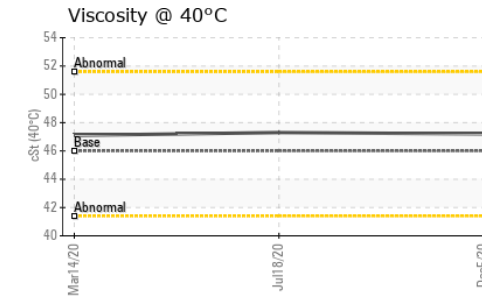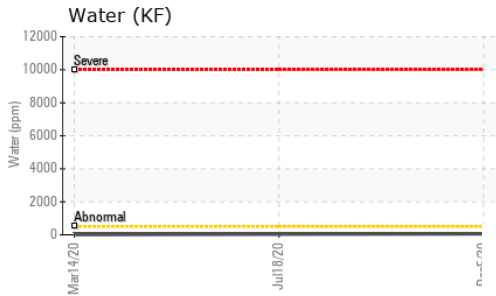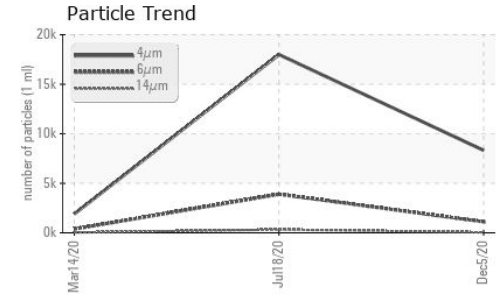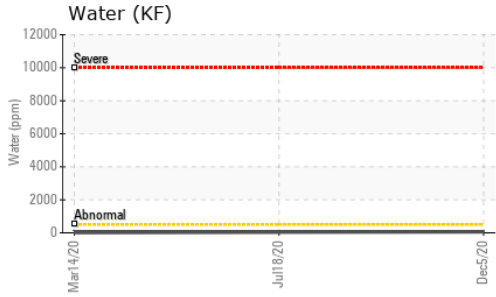






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	47.2	47.3	47.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

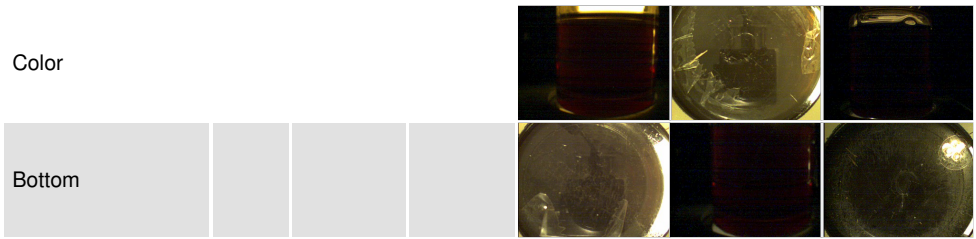

GRAPHS

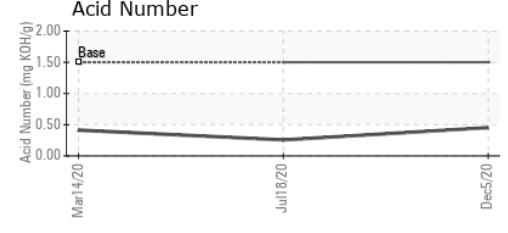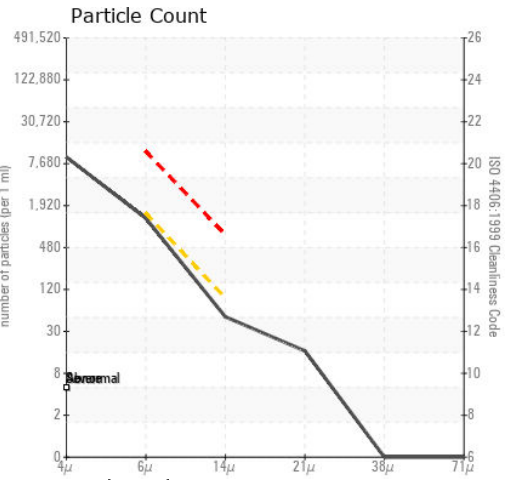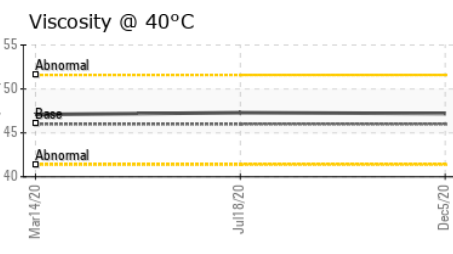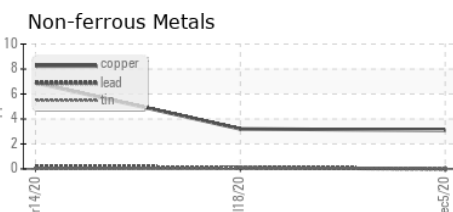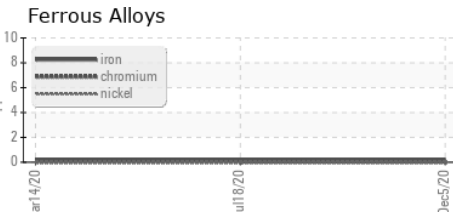

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC92144
Lab Number : 05145421
Unique Number : 9300696
Test Package : IND 2
Received : 28 Dec 2020
Tested : 29 Dec 2020
Diagnosed : 29 Dec 2020 - Jonathan Hester

UNCLE JOHNS PRIDE LLC
 10250 WOODBERRY RD
 TAMPA, FL
 US 33619
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)