




# OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area  
**Separation**  
 Machine Id  
**2401-B**  
 Component  
**Agitator Gearbox**  
 Fluid  
**MOBIL MOBILGEAR 600 XP ISO 150 (--- GAL)**

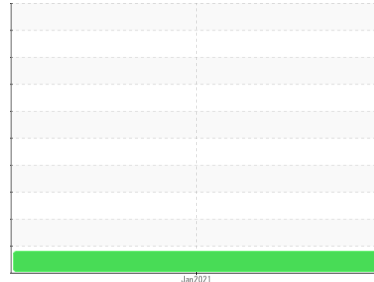

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0536883</b>	---	---
Sample Date	Client Info	<b>11 Jan 2021</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>Not Changed</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>150	<b>&lt;1</b>	---	---
Chromium ppm ASTM D5185m	>10	<b>0</b>	---	---
Nickel ppm ASTM D5185m	>10	<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>0</b>	---	---
Silver ppm ASTM D5185m		<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>25	<b>0</b>	---	---
Lead ppm ASTM D5185m	>100	<b>0</b>	---	---
Copper ppm ASTM D5185m	>50	<b>0</b>	---	---
Tin ppm ASTM D5185m	>10	<b>0</b>	---	---
Antimony ppm ASTM D5185m		<b>0</b>	---	---
Vanadium ppm ASTM D5185m		<b>0</b>	---	---
Cadmium ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>41</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>0</b>	---	---
Manganese ppm ASTM D5185m		<b>0</b>	---	---
Magnesium ppm ASTM D5185m		<b>0</b>	---	---
Calcium ppm ASTM D5185m		<b>0</b>	---	---
Phosphorus ppm ASTM D5185m		<b>364</b>	---	---
Zinc ppm ASTM D5185m		<b>0</b>	---	---
Sulfur ppm ASTM D5185m		<b>16377</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>50	<b>0</b>	---	---
Sodium ppm ASTM D5185m		<b>0</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water % ASTM D6304	>0.1	<b>0.010</b>	---	---
ppm Water ppm ASTM D6304	>1000	<b>109.2</b>	---	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>20000	<b>▲ 37940</b>	---	---
Particles >6µm ASTM D7647	>5000	<b>▲ 7797</b>	---	---
Particles >14µm ASTM D7647	>640	<b>519</b>	---	---
Particles >21µm ASTM D7647	>160	<b>143</b>	---	---
Particles >38µm ASTM D7647	>40	<b>5</b>	---	---
Particles >71µm ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>21/19/16	<b>▲ 22/20/16</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.822</b>	---	---



# OIL ANALYSIS REPORT

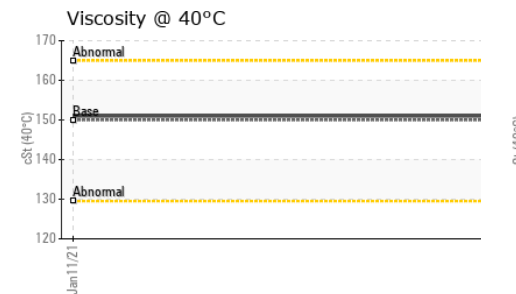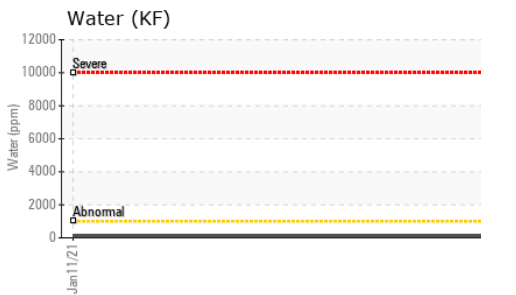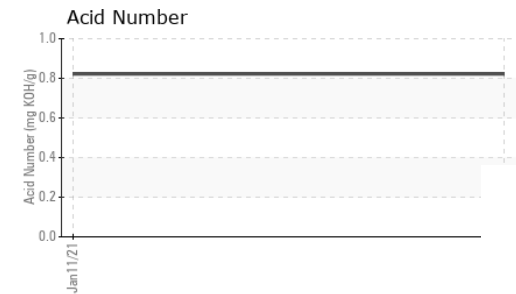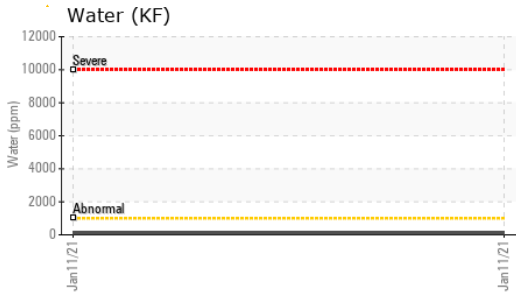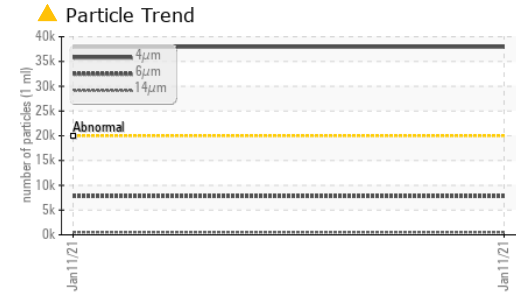





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	151	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

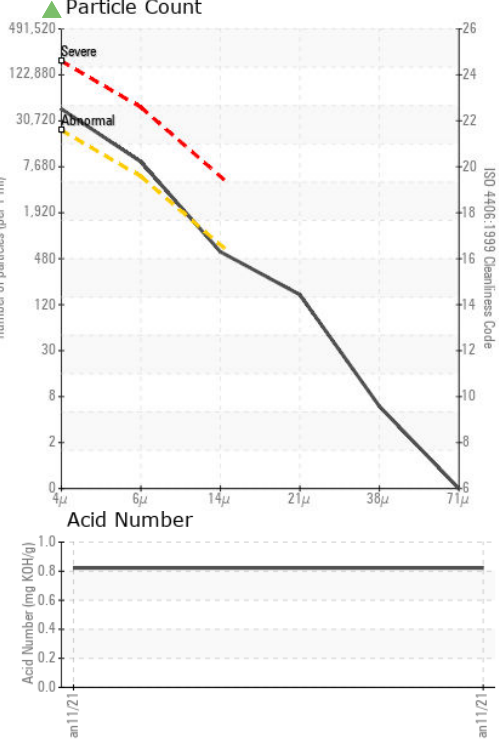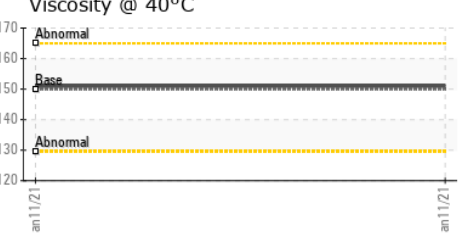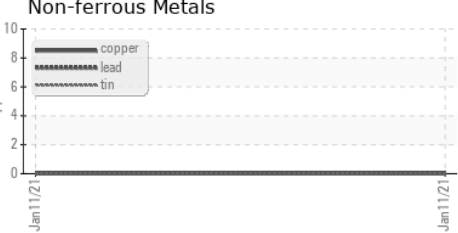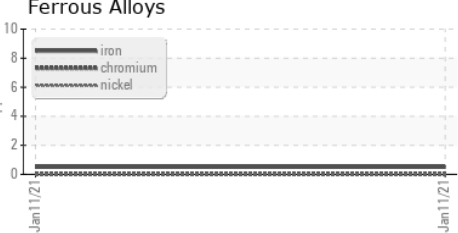

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0536883 **Received** : 21 Jan 2021  
**Lab Number** : 05163169 **Diagnosed** : 22 Jan 2021  
**Unique Number** : 9333451 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**AJINOMOTO USA**  
 4020 AJINOMOTO DRIVE  
 RALEIGH, NC  
 US 27610  
 Contact: Michael Thompson  
 thompsonm@ajiusa.com  
 T: (919)723-2142  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)