




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

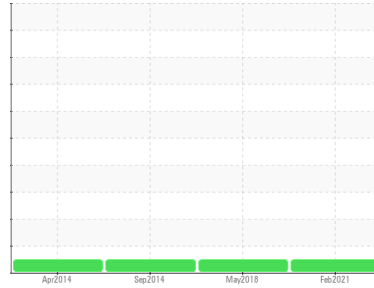

Machine Id  
**PETERBILT PETERBILT**

Component  
**Front Diesel Engine**

Fluid  
**CHEVRON URSA SUPER PLUS EC 15W40 (12 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KLM2339858</b>	KLM2327442	KLM2311306
Sample Date	Client Info			<b>22 Feb 2021</b>	07 May 2018	02 Sep 2014
Machine Age	mls	Client Info		<b>431367</b>	263963	1011628
Oil Age	mls	Client Info		<b>10000</b>	10000	30000
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	<b>24</b>	11	20
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	2
Lead	ppm	ASTM D5185m	>150	<b>3</b>	<1	<1
Copper	ppm	ASTM D5185m	>90	<b>3</b>	3	4
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	0
Antimony	ppm	ASTM D5185m		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>255</b>	221	388
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>119</b>	112	75
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>568</b>	470	347
Calcium	ppm	ASTM D5185m		<b>1576</b>	1300	1264
Phosphorus	ppm	ASTM D5185m	1200	<b>729</b>	629	901
Zinc	ppm	ASTM D5185m	1300	<b>821</b>	688	1136
Sulfur	ppm	ASTM D5185m		<b>2847</b>	1879	2687

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>6</b>	10	4
Sodium	ppm	ASTM D5185m		<b>6</b>	4	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	<b>0.3</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	6.	5.
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	18.	18.



# OIL ANALYSIS REPORT

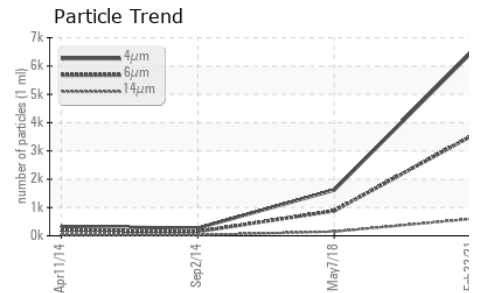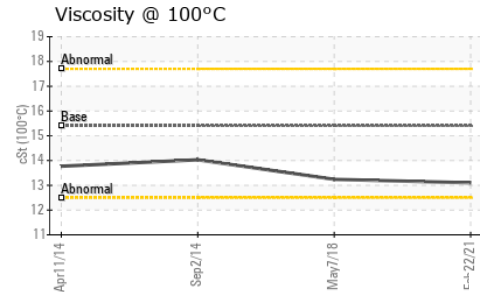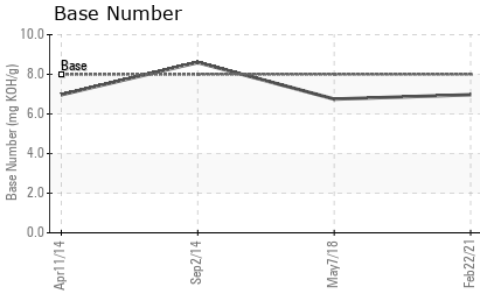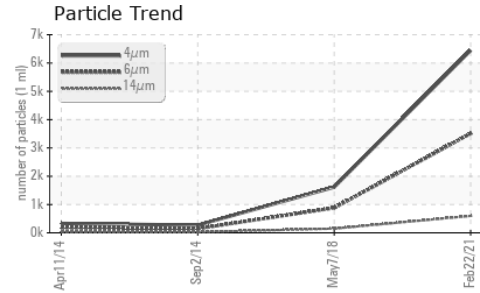

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>6446</b>	1615	269
Particles >6µm	ASTM D7647	>5000	<b>3512</b>	880	146
Particles >14µm	ASTM D7647	>640	<b>598</b>	149	24
Particles >21µm	ASTM D7647	>160	<b>201</b>	50	8
Particles >38µm	ASTM D7647	>40	<b>31</b>	7	1
Particles >71µm	ASTM D7647	>10	<b>3</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>19/16</b>	17/14	14/12


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.2</b>	14.	11.
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	<b>6.97</b>	6.75	8.60

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	13.24	14.03

## GRAPHS


### Ferrous Alloys

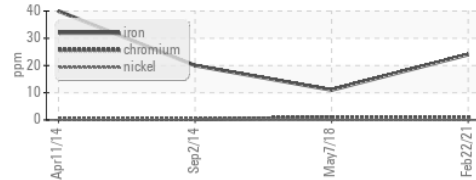


### Non-ferrous Metals

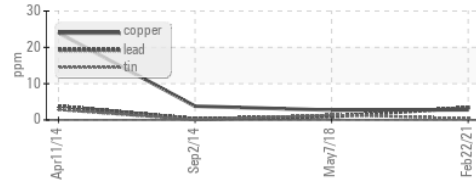


### Viscosity @ 100°C

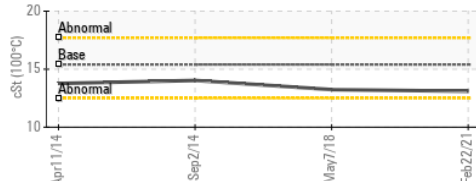

### Particle Count

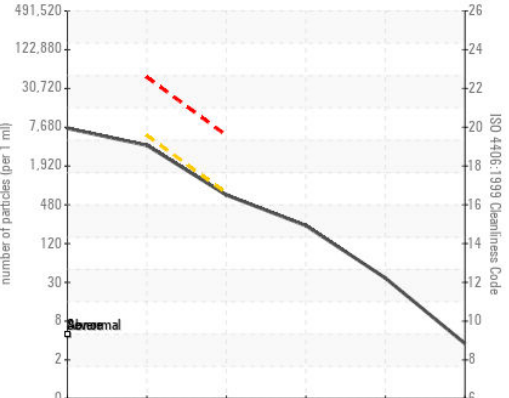

### Base Number

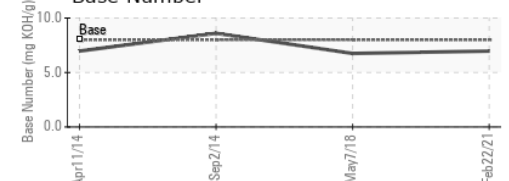

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KLM2339858 Received : 03 Mar 2021  
 Lab Number : 05195523 Tested : 04 Mar 2021  
 Unique Number : 9390834 Diagnosed : 04 Mar 2021 - Wes Davis  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

### BERRINGTON CUSTOM HAY

PO BOX 540  
 WELLINGTON, NV  
 US 89444  
 Contact: REBECCA BERRINGTON  
 berringtoncustomhay@gmail.com  
 T: (775)465-2264

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)