




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

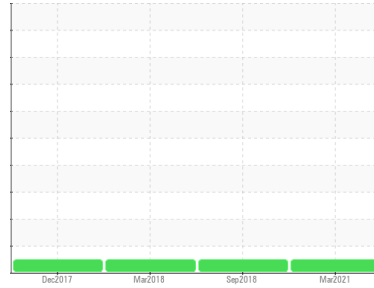

Machine Id
98191

Component
Compressor

Fluid
VAC-DEALMF20-5 JHF PETRO (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0546119 | WCI2342668 | WCI2325569 |
| Sample Date | Client Info | | | 12 Mar 2021 | 25 Sep 2018 | 01 Mar 2018 |
| Machine Age | hrs | Client Info | | 83090 | 68398 | 65276 |
| Oil Age | hrs | Client Info | | 0 | 4041 | 919 |
| Oil Changed | Client Info | | | Changed | Changed | Not Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.1 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >50 | 0 | <1 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >25 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >50 | 2 | 10 | 9 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Antimony | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185m | | 2 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Calcium | ppm | ASTM D5185m | | 52 | 32 | 29 |
| Phosphorus | ppm | ASTM D5185m | | 351 | 382 | 315 |
| Zinc | ppm | ASTM D5185m | | 423 | 339 | 341 |
| Sulfur | ppm | ASTM D5185m | | 2400 | 491 | 631 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 1 | 2 | <1 |
| Sodium | ppm | ASTM D5185m | | <1 | 6 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | <1 | 2 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|--------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.500 | 0.423 | 0.437 |




OIL ANALYSIS REPORT

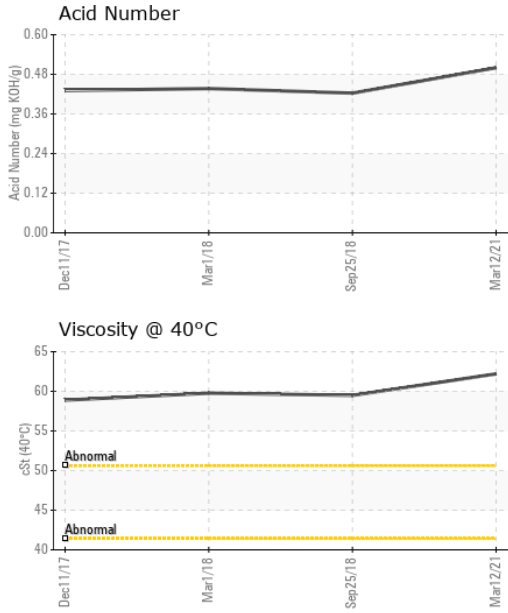



| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 62.2 | 59.49 | 59.77 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

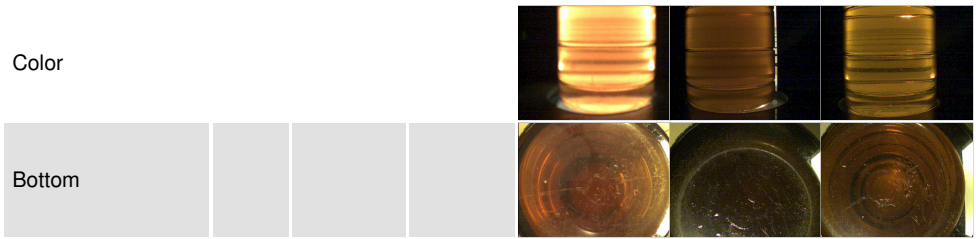

GRAPHS

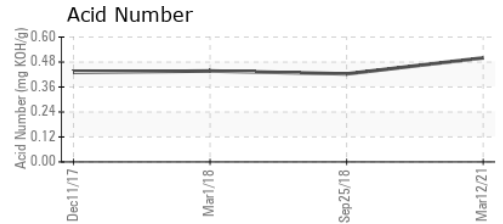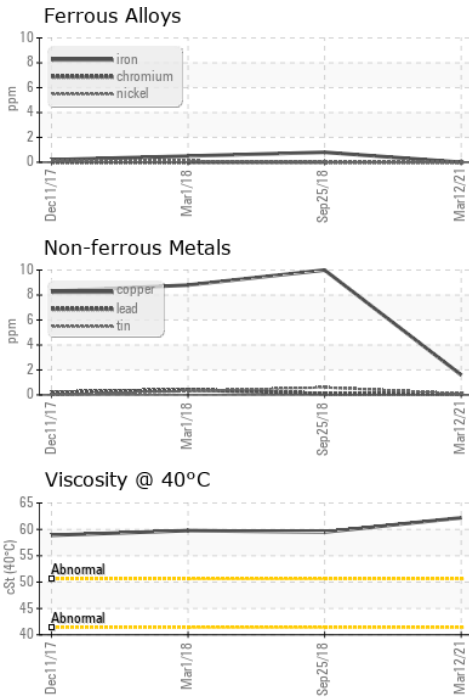

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0546119 **Received** : 23 Mar 2021
Lab Number : **05211018** **Diagnosed** : 25 Mar 2021
Unique Number : 9434911 **Diagnostician** : Don Baldrige
Test Package : IND 2

PRINSCO - FARGO
 4141 37TH ST N
 FARGO, ND
 US 58102
 Contact: DAVID JENSEN
 davidj@prinsco.com
 T: (701)293-2071
 F: (701)293-2052

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)