




# OIL ANALYSIS REPORT

## Sample Rating Trend

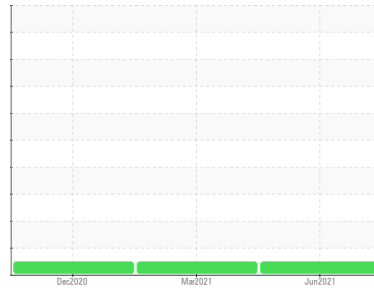

**NORMAL**



Machine Id  
**CCUP STG**  
 Component  
**Turbine**  
 Fluid

**PHILLIPS 66 TURBINE OIL ISO 32 (300 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. Linear Sweep Voltammetry (RULER – ASTM D6971) testing indicates normal levels of anti-oxidants present in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0545579</b>	WC0545580	WC0536329
Sample Date	Client Info	<b>02 Jun 2021</b>	01 Mar 2021	16 Dec 2020
Machine Age	hrs Client Info	<b>19544</b>	0	15808
Oil Age	hrs Client Info	<b>19544</b>	0	15808
Oil Changed	Client Info	<b>Not Changed</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Chromium ppm	ASTM D5185m >4	<b>0</b>	0	0
Nickel ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium ppm	ASTM D5185m	<b>0</b>	0	0
Silver ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum ppm	ASTM D5185m >10	<b>0</b>	0	<1
Lead ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Copper ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Tin ppm	ASTM D5185m >5	<b>0</b>	0	2
Antimony ppm	ASTM D5185m	<b>0</b>	0	3
Vanadium ppm	ASTM D5185m	<b>1</b>	0	0
Cadmium ppm	ASTM D5185m	<b>0</b>	0	<1

### ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	<b>2</b>	<1	<1
Barium ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum ppm	ASTM D5185m	<b>0</b>	0	0
Manganese ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium ppm	ASTM D5185m	<b>0</b>	0	0
Calcium ppm	ASTM D5185m	<b>2</b>	2	6
Phosphorus ppm	ASTM D5185m	<b>78</b>	83	76
Zinc ppm	ASTM D5185m	<b>8</b>	4	9
Sulfur ppm	ASTM D5185m	<b>42</b>	59	45

### CONTAMINANTS






method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Sodium ppm	ASTM D5185m	<b>2</b>	0	4
Potassium ppm	ASTM D5185m >20	<b>0</b>	0	0
Water %	ASTM D6304 >0.03	<b>0.003</b>	0.001	0.002
ppm Water	ASTM D6304 >300	<b>35.5</b>	13.0	23.4

### FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >2500	<b>947</b>	189	90
Particles >6µm	ASTM D7647 >640	<b>229</b>	49	36
Particles >14µm	ASTM D7647 >80	<b>22</b>	6	5
Particles >21µm	ASTM D7647 >20	<b>8</b>	1	1
Particles >38µm	ASTM D7647 >4	<b>1</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >18/16/13	<b>17/15/12</b>	15/13/10	14/12/10



# OIL ANALYSIS REPORT

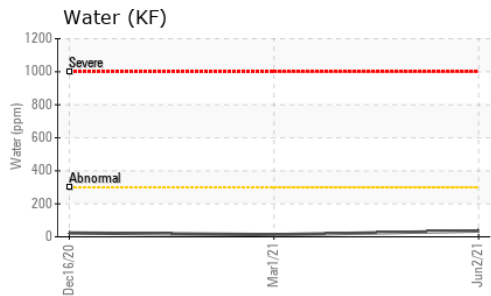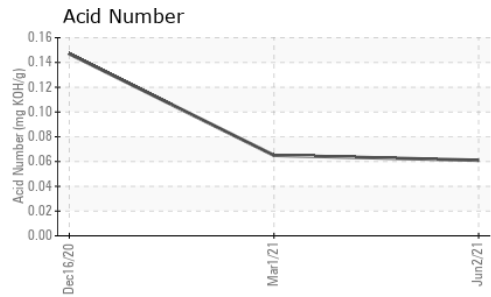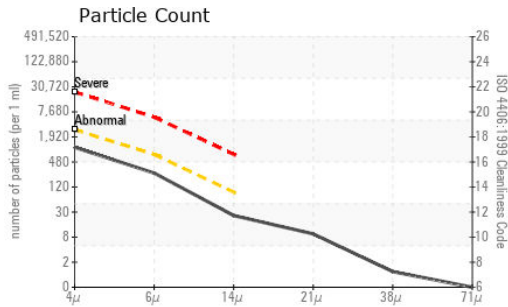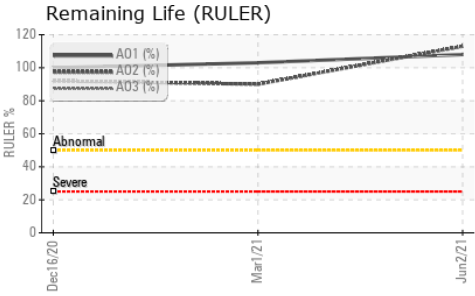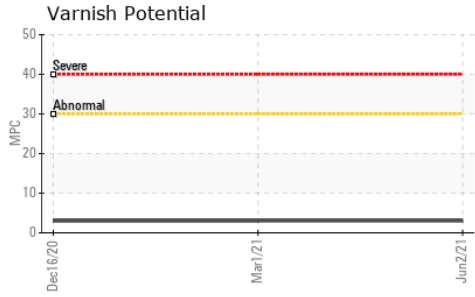


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.061</b>	0.065	0.147
Anti-Oxidant 1	%	ASTM D6971	<25	<b>108</b>	103	100
Anti-Oxidant 2	%	ASTM D6971	<25	<b>113</b>	90	92
MPC Varnish Potential	Scale	ASTM D7843	>15	<b>3</b>	3	3

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>31.6</b>	31.7	32.0
Visc @ 100°C	cSt	ASTM D445		<b>5.87</b>	5.87	5.9
Viscosity Index (VI)	Scale	ASTM D2270		<b>131</b>	130	130


SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						
MPC						

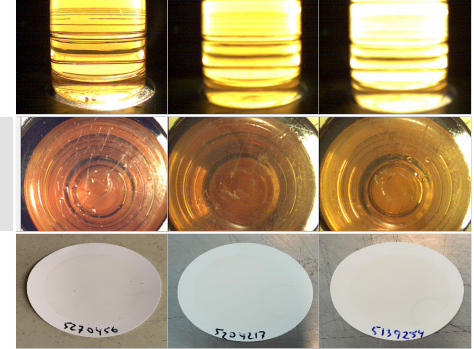


**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0545579  
**Lab Number** : **05270456**  
**Unique Number** : 9529388  
**Test Package** : AOM 1 ( Additional Tests: KF )  
**Received** : 03 Jun 2021  
**Tested** : 14 Jun 2021  
**Diagnosed** : 14 Jun 2021 - Doug Bogart

**NORTH CAROLINA STATE UNIVERSITY**  
 621 MOTOR POOL DR, FACILITIES DIVISION WAREHOUSE  
 RALEIGH, NC  
 US 27607  
 Contact: PAUL WALKER  
 apwalke3@ncsu.edu  
 T: (919)513-3646  
 F:


To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

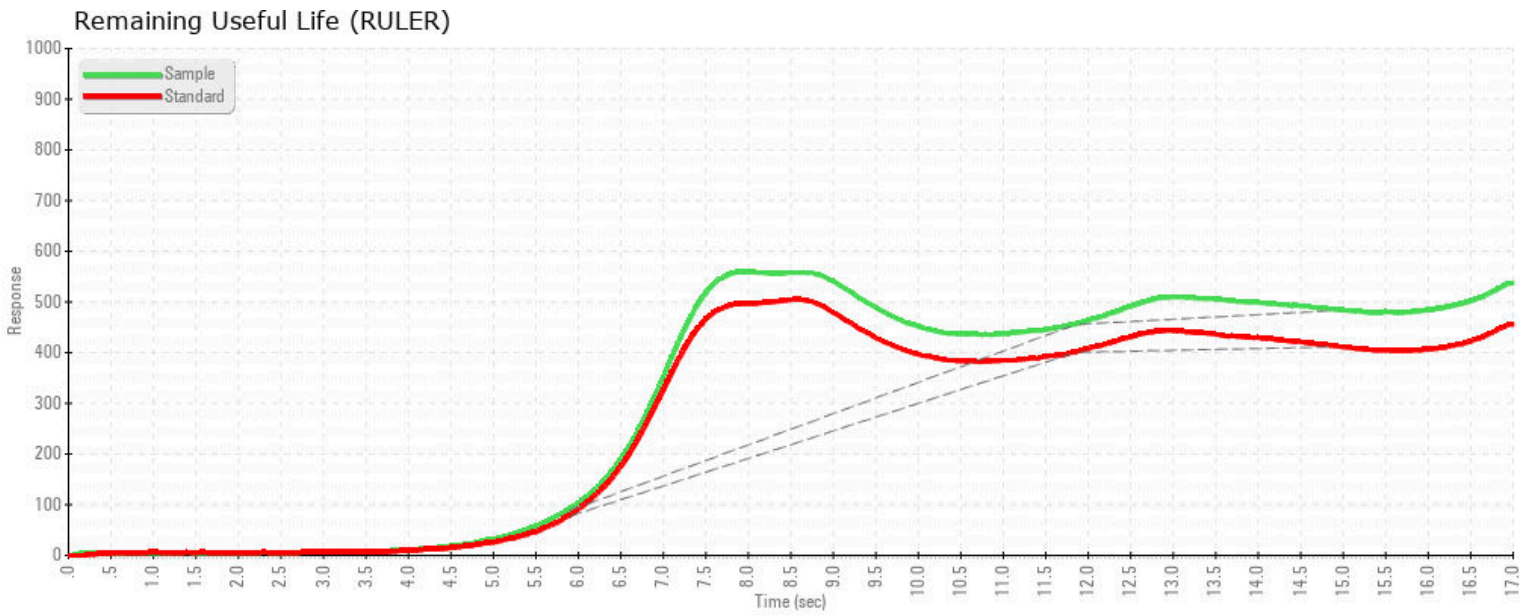

MPC (Varnish Test)

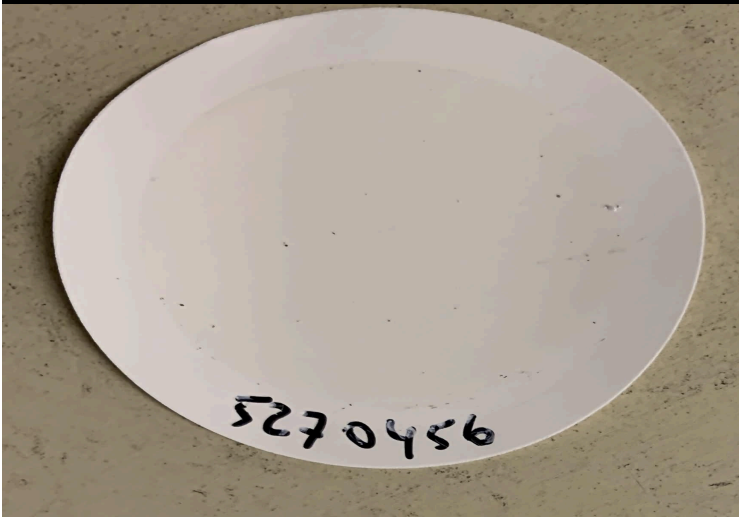

Sample Color & Clarity

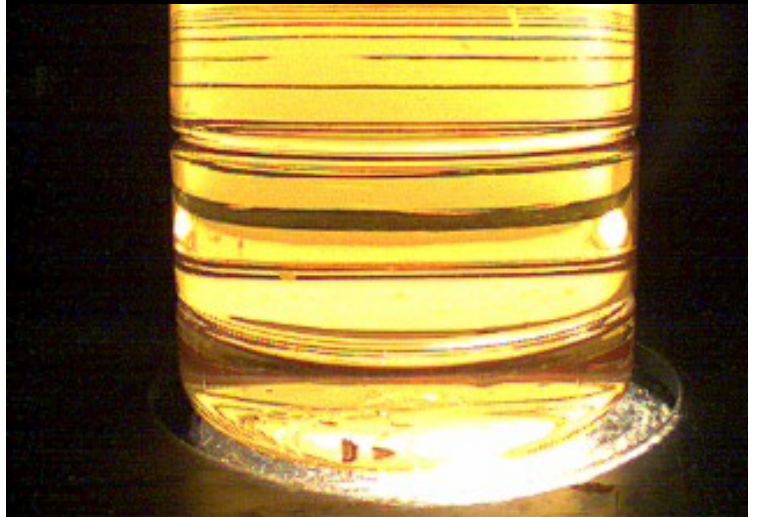

*This page left intentionally blank*