




# OIL ANALYSIS REPORT

Sample Rating Trend

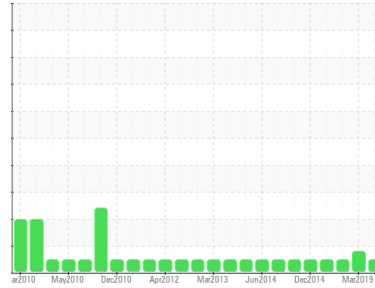

**NORMAL**



Machine Id  
**PETERBILT 101**

Component  
**Front Diesel Engine**

Fluid  
**CHEVRON URSA SUPER PLUS EC 15W40 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KLM2339082</b>	KLM2339559	KLM2336116
Sample Date	Client Info		<b>30 Jun 2021</b>	20 Mar 2019	06 Feb 2016
Machine Age	mls	Client Info	<b>1227510</b>	1156139	1099820
Oil Age	mls	Client Info	<b>10000</b>	10000	20000
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>19</b>	23	3
Chromium	ppm	ASTM D5185m >6	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	4	2
Lead	ppm	ASTM D5185m >10	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185m >150	<b>32</b>	▲ 340	0
Tin	ppm	ASTM D5185m >4	<b>1</b>	2	0
Antimony	ppm	ASTM D5185m	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>486</b>	276	387
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>127</b>	110	75
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>550</b>	486	353
Calcium	ppm	ASTM D5185m	<b>1532</b>	1392	1297
Phosphorus	ppm	ASTM D5185m 1200	<b>702</b>	638	951
Zinc	ppm	ASTM D5185m 1300	<b>813</b>	714	1037
Sulfur	ppm	ASTM D5185m	<b>2548</b>	2460	3222

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	10	6
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.2	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	6.5	3.
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>22.9</b>	20.6	13.




# OIL ANALYSIS REPORT


Particle Trend

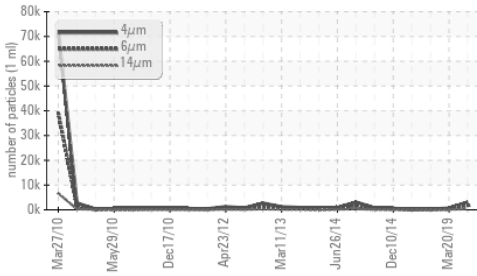


Base Number

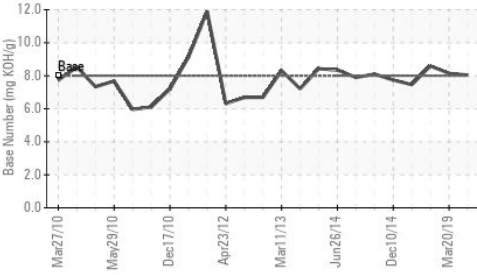

Viscosity @ 100°C

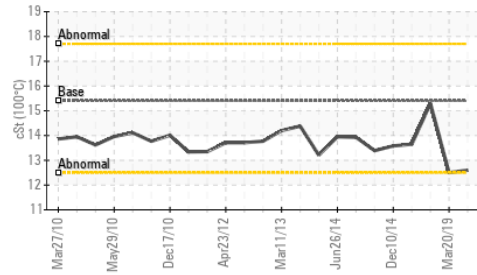

Particle Trend

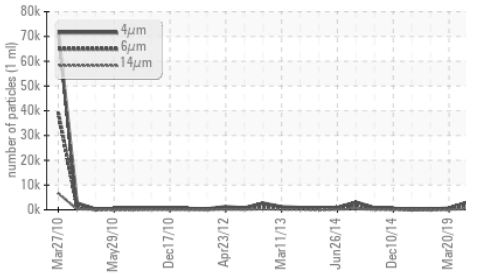

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>3143</b>	641	307
Particles >6µm	ASTM D7647	>5000	<b>1712</b>	349	167
Particles >14µm	ASTM D7647	>640	<b>291</b>	59	28
Particles >21µm	ASTM D7647	>160	<b>98</b>	20	9
Particles >38µm	ASTM D7647	>40	<b>15</b>	3	1
Particles >71µm	ASTM D7647	>10	<b>2</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>18/15</b>	16/13	15/12


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>18.7</b>	16.5	6.
Base Number (BN)	mg KOH/g ASTM D2896	8.0	<b>8.04</b>	8.14	8.59

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.4	<b>12.6</b>	12.5	15.3

## GRAPHS


Ferrous Alloys

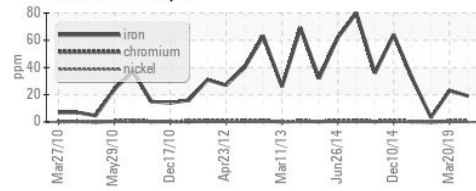


Non-ferrous Metals

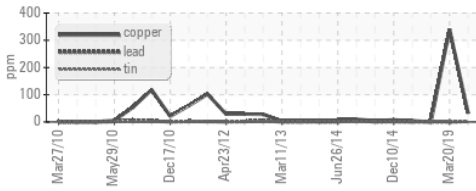


Viscosity @ 100°C

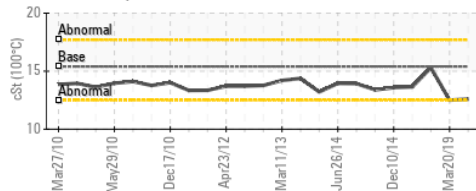

Particle Count

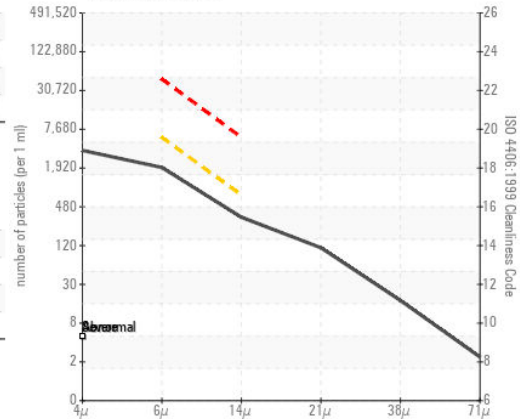

Base Number

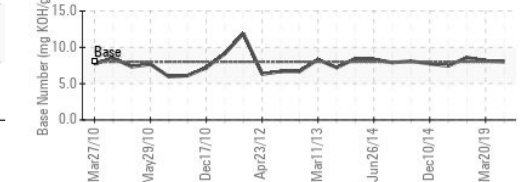

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KLM2339082 Received : 20 Jul 2021  
 Lab Number : 05307447 Tested : 22 Jul 2021  
 Unique Number : 9591416 Diagnosed : 22 Jul 2021 - Wes Davis  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

**BERRINGTON CUSTOM HAY**

PO BOX 540  
 WELLINGTON, NV  
 US 89444  
 Contact: REBECCA BERRINGTON  
 berringtoncustomhay@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (775)465-2264

F: