

No relevant graphs to display

	$\sim \sim$	N A N A	END	\sim N I
RE				

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	NORMAL	ABNORMAL	
Debris	scalar	*Visual	NONE	🔺 MODER	NONE	NONE	

Customer Id: STEMARKC Sample No.: KC98321 Lab Number: 05365799 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS



14 Jan 2021 Diag: Jonathan Hester

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

24 Jul 2020 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. The copper level is abnormal. All other component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

04 Oct 2019 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Machine Id KAESER BSD 60 6911569 (S/N 1539) Component

Compressor Fluic

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear


All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

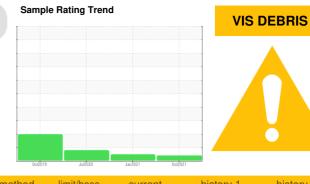


SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		KC98321	KC88180	KC87195
Sample Date		Client Info		01 Oct 2021	14 Jan 2021	24 Jul 2020
Machine Age	hrs	Client Info		19306	13084	8919
Oil Age	hrs	Client Info		6332	8000	7419
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver		ASTM D5185m	>2	۰ <1	0	0
Aluminum	ppm	ASTM D5185m		0	0	0
	ppm					
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		32	30	▲ 45 0
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	0	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	7	0
Zinc	ppm	ASTM D5185m		0	21	0
CONTAMINANTS	6	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.005	0.012	0.006
ppm Water	ppm	ASTM D6304	>500	52.6	124.6	60.9
FLUID CLEANLIN	NESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647			1090	3279
Particles >6µm		ASTM D7647	>1300		335	963
Particles >14µm		ASTM D7647	>80		33	22
Particles >21µm		ASTM D7647	>20		12	5
Particles >38µm		ASTM D7647	>4		0	0
Particles >71µm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13		16/12	17/12
FLUID DEGRADATION method limit/base current history 1 history 3						history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.390	0.394	0.385
		20010				

Contact/Location: Service Manager - STEMARKC



OIL ANALYSIS REPORT

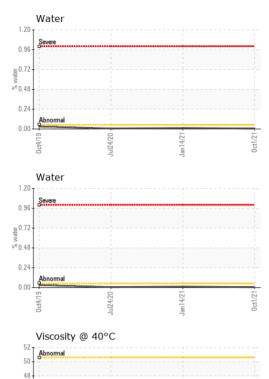

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	🔺 MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	45.0	43.9	44.8
SAMPLE IMAGES		method	limit/base	current	history 1	history 2
Color						



Bottom

