




OIL ANALYSIS REPORT

Sample Rating Trend

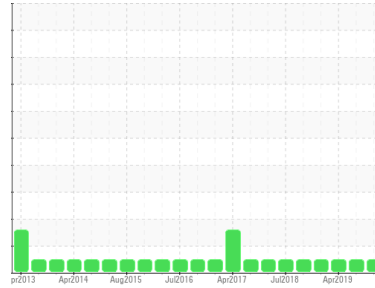

NORMAL



Machine Id
PETERBILT 303

Component
Diesel Engine

Fluid
CHEVRON URSA SUPER PLUS EC 15W40 (40 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0006361	KLM2339018	KLM2339712
Sample Date	Client Info		10 Sep 2021	05 Mar 2021	08 Apr 2019
Machine Age	mls	Client Info	772316	758117	724000
Oil Age	mls	Client Info	11000	10000	14000
Oil Changed	Client Info		Not Changed	Not Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	22	10	10
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	<1	<1	0
Aluminum	ppm	ASTM D5185m >25	2	<1	4
Lead	ppm	ASTM D5185m >40	<1	<1	0
Copper	ppm	ASTM D5185m >330	4	4	3
Tin	ppm	ASTM D5185m >15	<1	<1	0
Antimony	ppm	ASTM D5185m	<1	0	2
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	368	355	296
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	124	121	113
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	539	521	542
Calcium	ppm	ASTM D5185m	1414	1503	1523
Phosphorus	ppm	ASTM D5185m 1200	644	716	674
Zinc	ppm	ASTM D5185m 1300	811	770	766
Sulfur	ppm	ASTM D5185m	2687	2758	2548

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	20	21	5
Sodium	ppm	ASTM D5185m	<1	<1	2
Potassium	ppm	ASTM D5185m >20	0	<1	10

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	6.7	5.7	6.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.6	21.5	21



OIL ANALYSIS REPORT

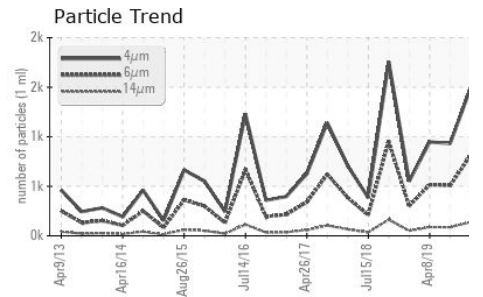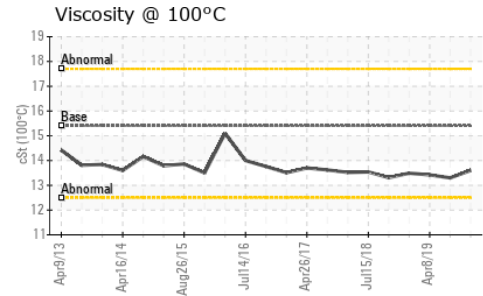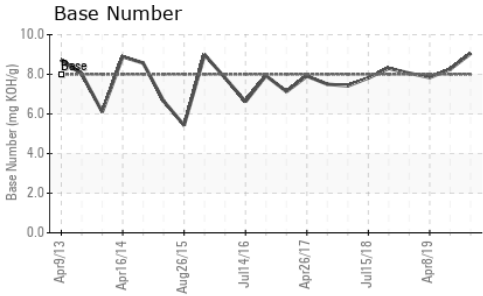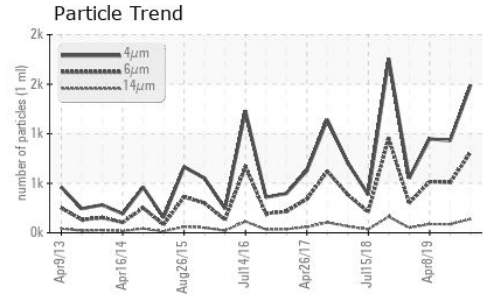






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1490	931	948
Particles >6µm	ASTM D7647	>5000	812	507	516
Particles >14µm	ASTM D7647	>640	138	86	88
Particles >21µm	ASTM D7647	>160	47	29	29
Particles >38µm	ASTM D7647	>40	7	4	4
Particles >71µm	ASTM D7647	>10	1	0	0
Oil Cleanliness	ISO 4406 (c)	>19/16	17/14	16/14	16/14

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	17.2	16.5	17
Base Number (BN)	mg KOH/g ASTM D2896	8.0	9.05	8.26	7.84

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.4	13.6	13.3	13.42

GRAPHS

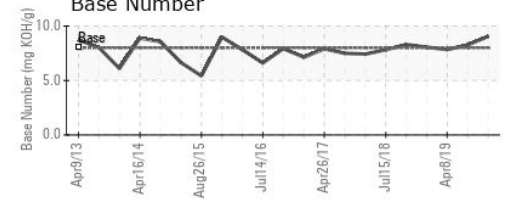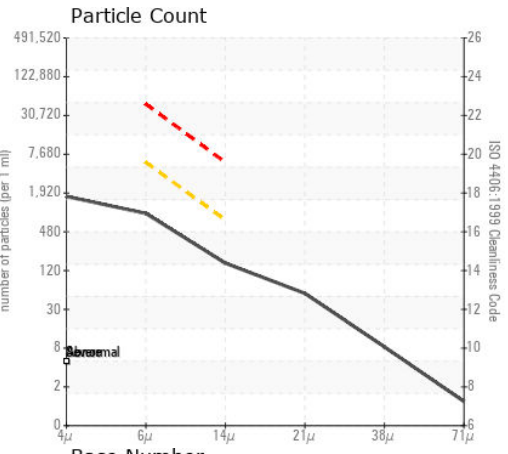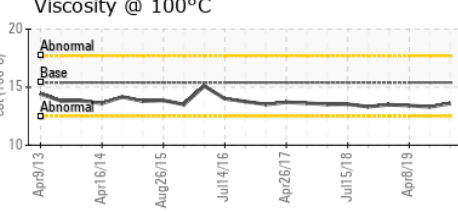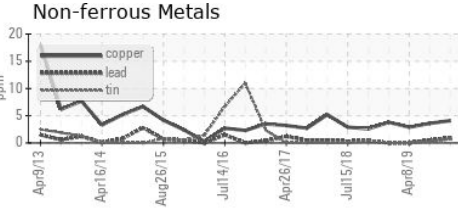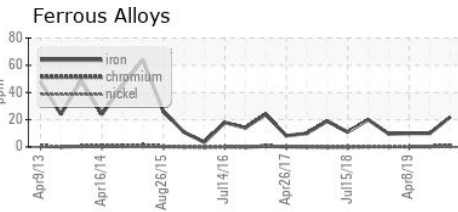

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0006361
Lab Number : **05374457**
Unique Number : 9698568
Test Package : MOB 2 (Additional Tests: PrtCount)
Received : 14 Oct 2021
Tested : 15 Oct 2021
Diagnosed : 15 Oct 2021 - Jonathan Hester

BERRINGTON CUSTOM HAY
 PO BOX 540
 WELLINGTON, NV
 US 89444
 Contact: REBECCA BERRINGTON
 berringtoncustomhay@gmail.com
 T: (775)465-2264
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)