


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

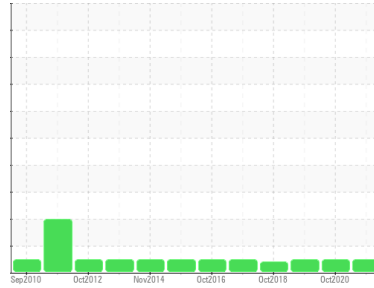

Machine Id
C-15
Component
Wind Turbine Gearbox
Fluid
MOBIL MOBILGEAR SHC XMP 320 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			MHI017035	MHI025919	MHI019577
Sample Date	Client Info			25 Oct 2021	08 Oct 2020	23 Oct 2019
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		89194	82442	75497
Oil Changed	Client Info			Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL






WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>200	20	17	18
Iron	ppm	ASTM D5185m	>200	14	17	13
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		2	0	0
Aluminum	ppm	ASTM D5185m		<1	0	<1
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m	>75	2	2	1
Tin	ppm	ASTM D5185m		<1	0	0
Antimony	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	3	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m	0	0	<1	0
Phosphorus	ppm	ASTM D5185m	485	307	381	372
Zinc	ppm	ASTM D5185m	0	10	14	10
Sulfur	ppm	ASTM D5185m		3066	3535	3071

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	0	<1	<1
Sodium	ppm	ASTM D5185m	>15	0	0	<1
Potassium	ppm	ASTM D5185m	>20	0	0	7
Water	%	ASTM D6304	>0.1	0.008	0.007	0.006
ppm Water	ppm	ASTM D6304	>1000	88.7	70.6	67.2

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7964	1153	5205
Particles >6µm		ASTM D7647	>5000	2469	301	1707
Particles >14µm		ASTM D7647	>640	209	26	139
Particles >21µm		ASTM D7647	>160	47	7	32
Particles >38µm		ASTM D7647	>40	1	0	8
Particles >71µm		ASTM D7647	>10	0	0	7
Oil Cleanliness		ISO 4406 (c)	>--/19/16	20/18/15	17/15/12	20/18/14

OIL ANALYSIS REPORT

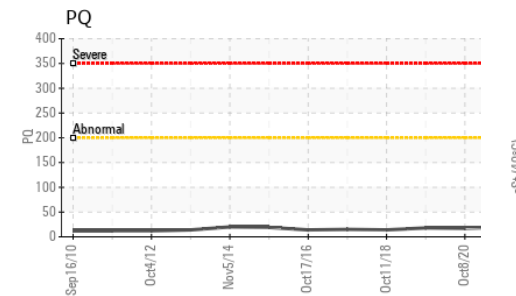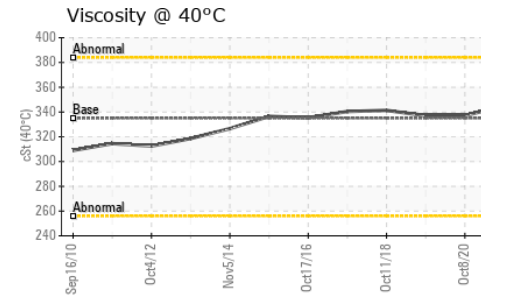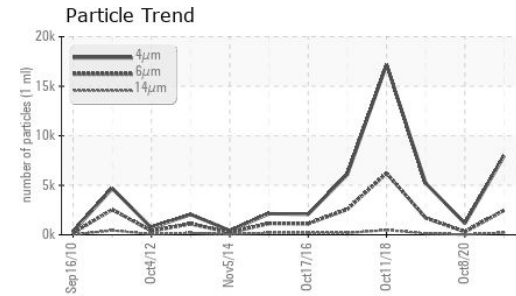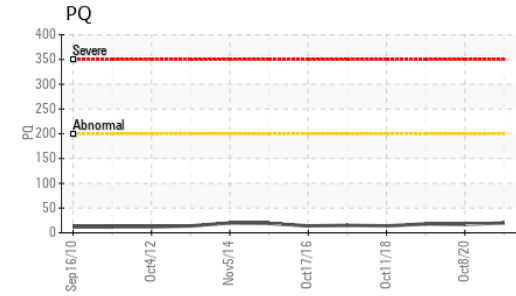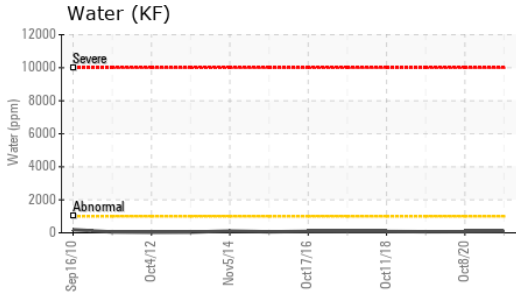


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	1.533	1.504	1.424






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	335	345	337	337

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

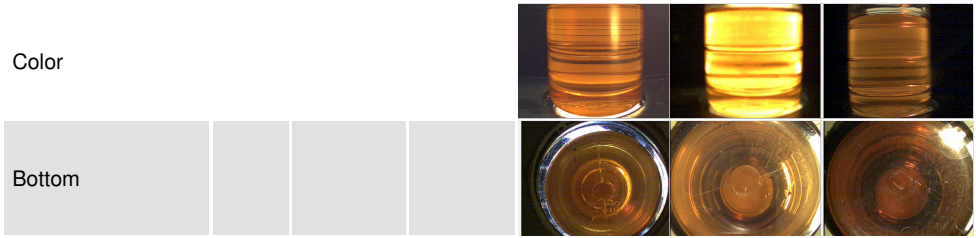

GRAPHS

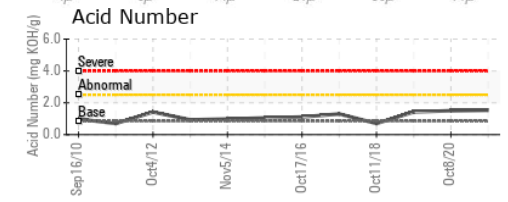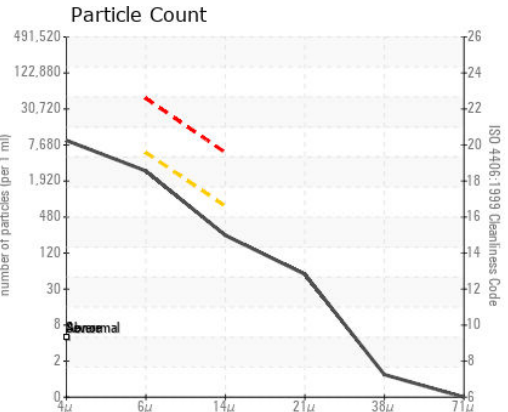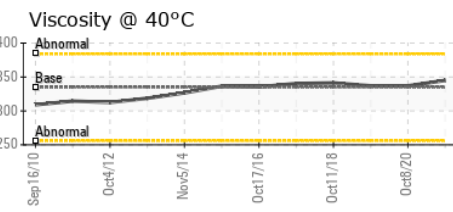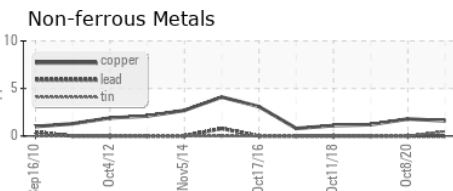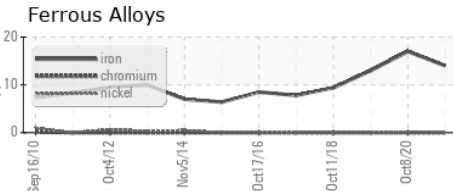

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MHI017035 **Received** : 15 Nov 2021
Lab Number : 05400199 **Diagnosed** : 16 Nov 2021
Unique Number : 9739349 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

DIAMOND WTG - BULL CREEK - MPS BC
 PO BOX 545
 O'DONNELL, TX
 US 79351
 Contact: GARY GRANT
 gary.grant@diamondwtg.com
 T: (806)439-6660
 F: (806)439-6659

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)