




# OIL ANALYSIS REPORT

## Sample Rating Trend

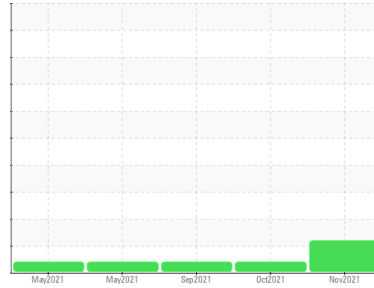

ISO



Area  
**GUAY SON/Yavaros**  
Machine Id  
**Pacifico Ind - Azteca HS**  
Component  
**Hydraulic System**  
Fluid  
**QUAKER STATE DUPLEX AW HYDRAULIC 68 (1200 LTR)**

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. ( Customer Sample Comment: rush )

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>KL0007655</b>   | KL0006825   | KL0006807   |
| Sample Date   | Client Info |             | <b>10 Nov 2021</b> | 20 Oct 2021 | 29 Sep 2021 |
| Machine Age   | hrs         | Client Info | <b>50350</b>       | 50000       | 0           |
| Oil Age       | hrs         | Client Info | <b>508</b>         | 158         | 12          |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | Not Changd  |
| Sample Status |             |             | <b>ABNORMAL</b>    | ABNORMAL    | ABNORMAL    |

### CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

### WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >20 | <b>4</b>     | 5        | 6        |
| Chromium | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Titanium | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >10 | <b>&lt;1</b> | <1       | <1       |
| Lead     | ppm    | ASTM D5185m >10 | <b>0</b>     | <1       | <1       |
| Copper   | ppm    | ASTM D5185m >75 | <b>4</b>     | 4        | 2        |
| Tin      | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | 0        |
| Antimony | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |

### ADDITIVES

|            | method | limit/base       | current    | history1 | history2 |
|------------|--------|------------------|------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 4.0  | <b>0</b>   | 0        | <1       |
| Barium     | ppm    | ASTM D5185m 0.0  | <b>0</b>   | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 0.0  | <b>0</b>   | 0        | <1       |
| Manganese  | ppm    | ASTM D5185m      | <b>0</b>   | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 0.1  | <b>0</b>   | 3        | 2        |
| Calcium    | ppm    | ASTM D5185m 54   | <b>19</b>  | 16       | 14       |
| Phosphorus | ppm    | ASTM D5185m 272  | <b>95</b>  | 74       | 80       |
| Zinc       | ppm    | ASTM D5185m 357  | <b>89</b>  | 66       | 72       |
| Sulfur     | ppm    | ASTM D5185m 2434 | <b>488</b> | 528      | 513      |

### CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>1</b> | 1        | 0        |
| Sodium    | ppm    | ASTM D5185m     | <b>3</b> | 7        | 9        |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b> | 0        | 0        |


### FLUID CLEANLINESS

|                 | method       | limit/base | current        | history1 | history2 |
|-----------------|--------------|------------|----------------|----------|----------|
| Particles >4µm  | ASTM D7647   |            | <b>139634</b>  | 84781    | 78437    |
| Particles >6µm  | ASTM D7647   | >1300      | <b>▲ 33042</b> | ▲ 8159   | ▲ 5603   |
| Particles >14µm | ASTM D7647   | >160       | <b>▲ 833</b>   | 56       | 54       |
| Particles >21µm | ASTM D7647   | >40        | <b>▲ 115</b>   | 6        | 8        |
| Particles >38µm | ASTM D7647   | >10        | <b>1</b>       | 0        | 0        |
| Particles >71µm | ASTM D7647   | >3         | <b>0</b>       | 0        | 0        |
| Oil Cleanliness | ISO 4406 (c) | >17/14     | <b>▲ 22/17</b> | ▲ 20/13  | ▲ 20/13  |




# OIL ANALYSIS REPORT


## Particle Trend

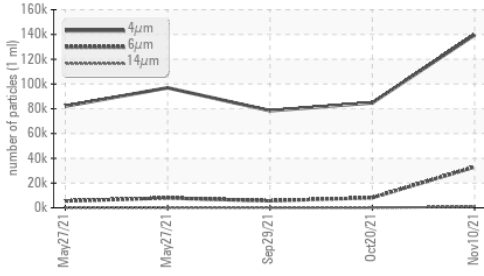


## Particle Trend

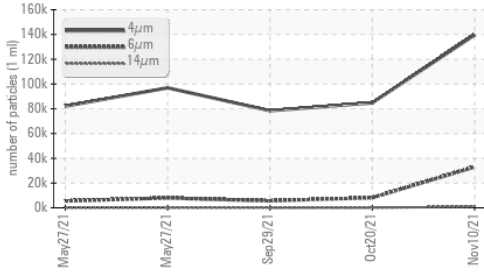

## Acid Number

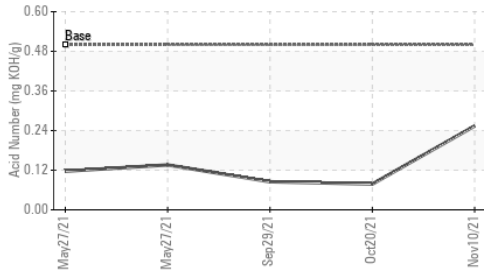

## Viscosity @ 40°C

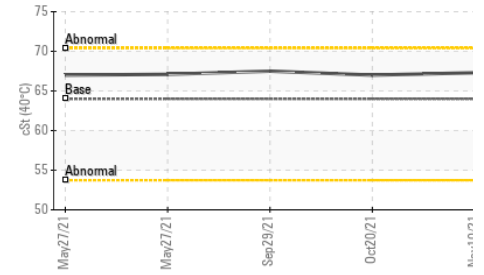

| FLUID DEGRADATION | method   | limit/base | current | history1     | history2 |       |
|-------------------|----------|------------|---------|--------------|----------|-------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.5     | <b>0.254</b> | 0.078    | 0.085 |


| VISUAL           | method | limit/base | current | history1     | history2 |       |
|------------------|--------|------------|---------|--------------|----------|-------|
| White Metal      | scalar | *Visual    | NONE    | <b>VLITE</b> | NONE     | VLITE |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Debris           | scalar | *Visual    | NONE    | <b>VLITE</b> | NONE     | NONE  |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    | NORML |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    | NORML |
| Emulsified Water | scalar | *Visual    | >0.1    | <b>NEG</b>   | NEG      | NEG   |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | NEG      | NEG   |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 40°C      | cSt    | ASTM D445  | 64      | <b>67.3</b> | 67.0     | 67.5 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|


Color

Bottom

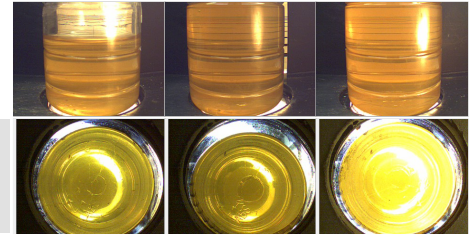


## GRAPHS


### Ferrous Alloys

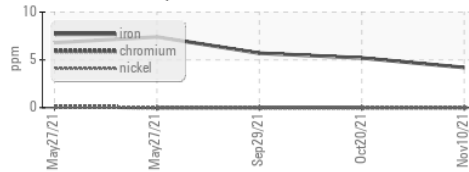


### Non-ferrous Metals

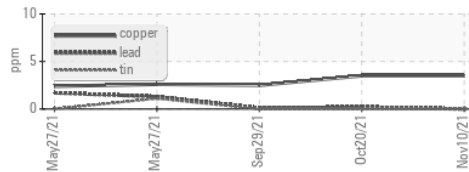


### Viscosity @ 40°C

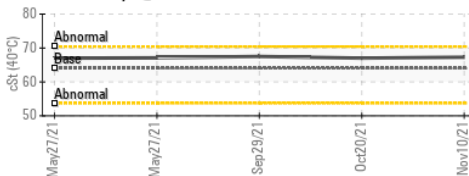

### Particle Count

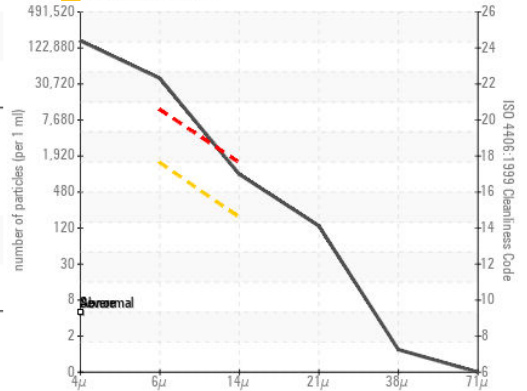

### Acid Number

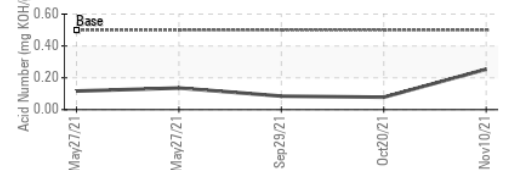

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0007655 **Received** : 15 Nov 2021  
**Lab Number** : 05400998 **Tested** : 16 Nov 2021  
**Unique Number** : 9740148 **Diagnosed** : 16 Nov 2021 - Doug Bogart  
**Test Package** : MOB 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140

Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: