




OIL ANALYSIS REPORT

Sample Rating Trend

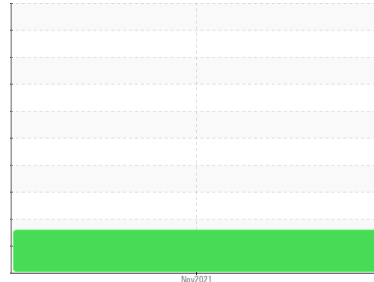

DIRT



Area
KANSAS/44
 Machine Id
87.18L [KANSAS^44]
 Component
Rear Pump Drive
 Fluid
MOBIL MOBILFLUID 424 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

Confirm oil type. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0598598	---	---
Sample Date	Client Info		05 Nov 2021	---	---
Machine Age	Client Info		1178	---	---
Oil Age	Client Info		0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	142	---	---
Chromium	ppm	ASTM D5185m	>15	1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>20	<1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m	>35	<1	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Antimony	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		<1	---	---



ADDITIVES	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		145	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		5	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		77	---	---
Calcium	ppm	ASTM D5185m		149	---	---
Phosphorus	ppm	ASTM D5185m		962	---	---
Zinc	ppm	ASTM D5185m		124	---	---
Sulfur	ppm	ASTM D5185m		32057	---	---

CONTAMINANTS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	▲ 76	---	---
Sodium	ppm	ASTM D5185m		3	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	VLITE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---



OIL ANALYSIS REPORT







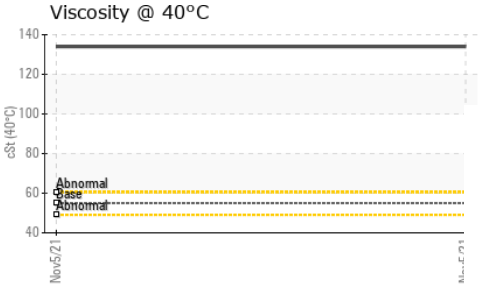
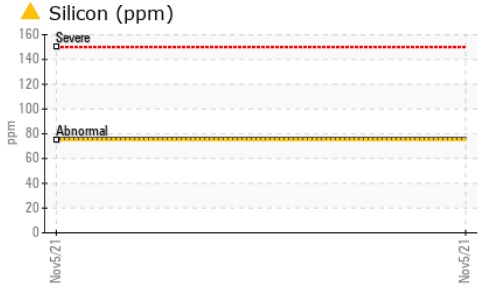


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 55	134	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

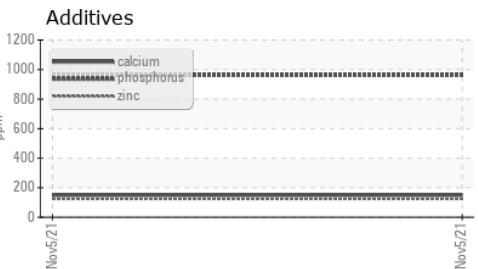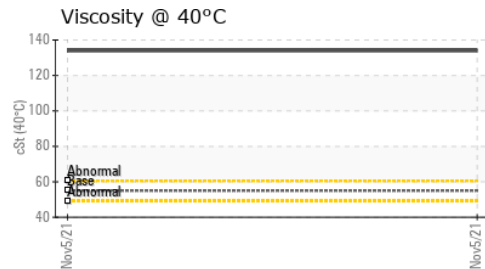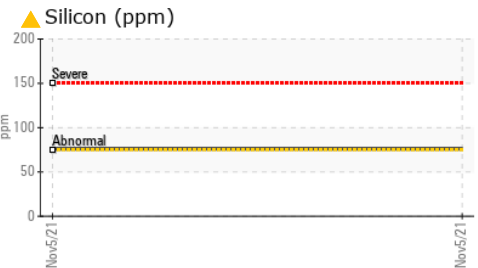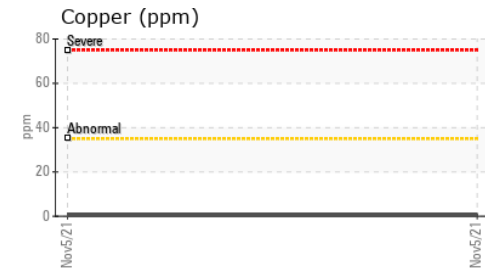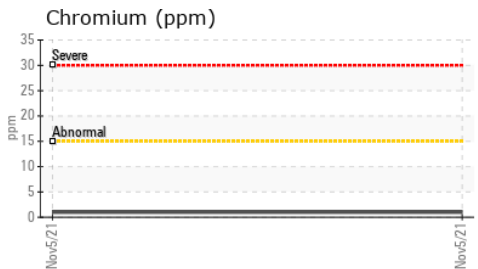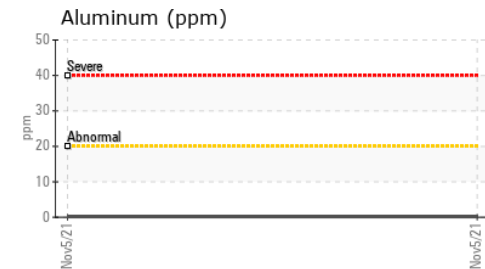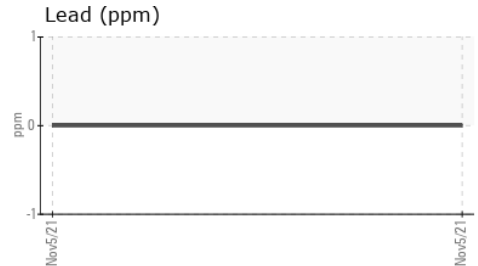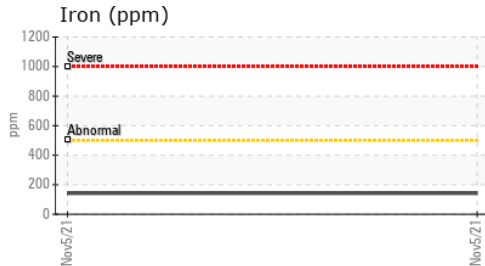

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0598598
Lab Number : 05401588
Unique Number : 9740738
Test Package : MOBCE

Received : 15 Nov 2021
Tested : 17 Nov 2021
Diagnosed : 17 Nov 2021 - Don Baldrige

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net
 T: (316)943-6491
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)