

OIL ANALYSIS REPORT

Area **P1** 3104 - 3101 EVAPORATOR Component

Gearbox Fluic

MOBIL MOBILGEAR 600 XP ISO 150 (15 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

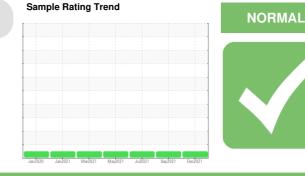

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0647279	WC0623704	WC0578478
Sample Date		Client Info		30 Dec 2021	10 Sep 2021	20 Jul 2021
Machine Age	hrs	Client Info		0	0	0
-	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	15	6	4
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		3	<1	<1
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	0
	ppm	ASTM D5185m	>100	0	0	0
	ppm	ASTM D5185m	>200	0	0	0
	ppm	ASTM D5185m	>25	0	0	0
	ppm	ASTM D5185m		<1	0	<1
	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		17	14	29
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	0	3
Calcium	ppm	ASTM D5185m		3	0	7
Phosphorus	ppm	ASTM D5185m		320	310	329
	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m		13679	13536	12960
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	<1	<1
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.2	0.011	0.011	0.001
ppm Water	ppm	ASTM D6304	>2000	118.9	113.3	3.9
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		132978	41875	24519
Particles >6µm		ASTM D7647	>40000	25352	2773	2423
Particles >14µm		ASTM D7647	>10000	611	84	143
Particles >21µm		ASTM D7647	>2500	71	18	39
Particles >38µm		ASTM D7647	>640	4	0	1
Particles >71µm		ASTM D7647		0	0	0
				-		

Acid Number (AN)

FLUID DEGRADATION

Oil Cleanliness

mg KOH/g ASTM D8045

ISO 4406 (c) >22/20

0.768

24/22/16

0.769 0.775 Submitted By: BRENT FORSYTHE


23/19/14


22/18/14


Report Id: AJIRAL [WUSCAR] 05436333 (Generated: 01/26/2024 08:59:15) Rev: 1



OIL ANALYSIS REPORT

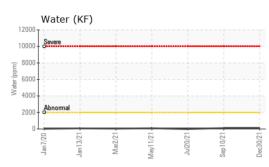


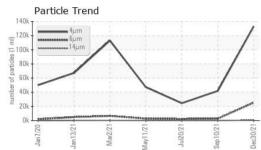

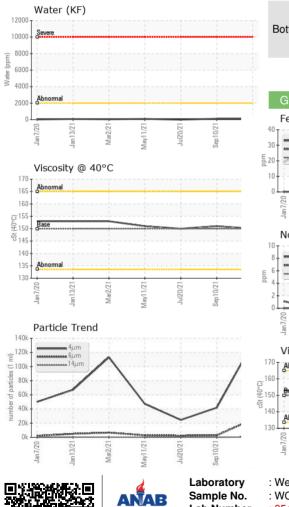

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	150	151	150
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						
					Contraction of the second	

Bottom

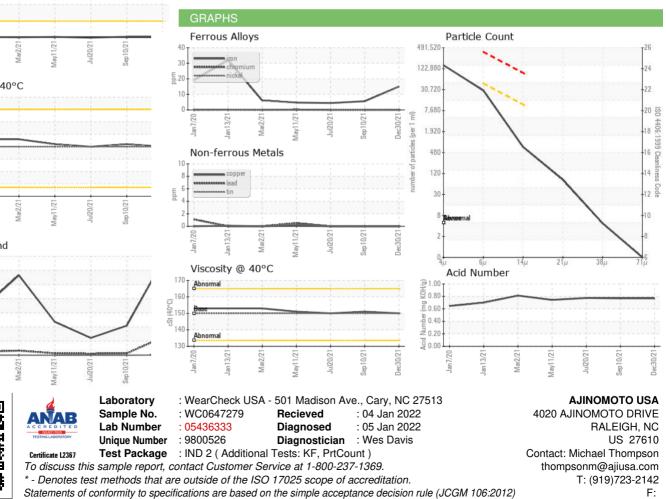

Submitted By: BRENT FORSYTHE

Page 2 of 2