


PROBLEM SUMMARY

4.1 FOX (S/N E000114)

Refrigeration Compressor Fluid FVC 68 (--- GAL)

COMPONENT CONDITION SUMMARY

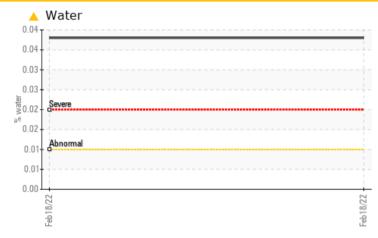

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status				MARGINAL		
Water	%	ASTM D6304	>0.01	A 0.038		
ppm Water	ppm	ASTM D6304	>100	A 385.5		

Customer Id: THEAUB Sample No.: WC0507708 Lab Number: 05477059 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>



There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



DIAGNOSIS

Contamination

Fluid Condition

Wear

oil

Recommendation

OIL ANALYSIS REPORT

SAMPLE INFORMATION

Sample Rating Trend

limit/base

current

history1

WATER

history2

Machine Ic 4.1 FOX (S/N E000114) Component

Refrigeration Compressor FVC 68 (--- GAL)

WC0507708 Sample Number **Client Info** No corrective action is recommended at this time. 18 Feb 2022 Sample Date Client Info Resample at the next service interval to monitor. 8 Machine Age mths **Client Info** Oil Age mths Client Info 0 All component wear rates are normal. Oil Changed N/A **Client Info** MARGINAL Sample Status There is a light concentration of water present in the WEAR METALS method limit/base current history1 history2 >50 7 Iron ppm ASTM D5185m Chromium ASTM D5185m 0 ppm >10 The AN level is acceptable for this fluid. The Nickel ppm ASTM D5185m 0 Titanium ASTM D5185m 0 ppm Silver ppm ASTM D5185m <1 Aluminum ASTM D5185m >10 0 ppm Lead ASTM D5185m >10 <1 ppm ASTM D5185m Copper >50 <1 ppm Tin ppm ASTM D5185m >10 <1 Antimony ASTM D5185m 0 ppm Vanadium ppm ASTM D5185m 0 Cadmium ASTM D5185m 0 ppm **ADDITIVES** method limit/base current historv1 history2 Boron ppm ASTM D5185m 4 Barium ASTM D5185m 0 ppm 0 Molybdenum ppm ASTM D5185m Manganese ASTM D5185m <1 ppm 0 Magnesium ppm ASTM D5185m Calcium ppm ASTM D5185m 0 Phosphorus ASTM D5185m 1093 ppm Zinc ASTM D5185m 0 ppm Sulfur ASTM D5185m 0 ppm CONTAMINANTS method limit/base current history history2 Silicon ASTM D5185m >15 3 ppm Sodium ASTM D5185m ppm <1 >20 0 Potassium ppm ASTM D5185m Water % >0.01 0.038 ASTM D6304 ppm Water ppm ASTM D6304 >100 385.5

method

FLUID DEGRADATION method limit/base history1 history2 current 0.066 Acid Number (AN) mg KOH/g ASTM D974

condition of the oil is suitable for further service.



80

7 7

ŝ

6

55 50 Feb18/22

OIL ANALYSIS REPORT

method


limit/base


current


history1


history2

VISUAL



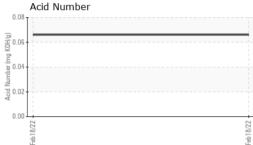

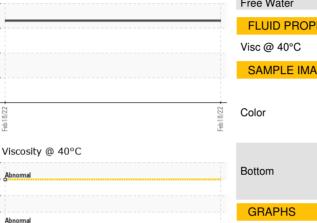

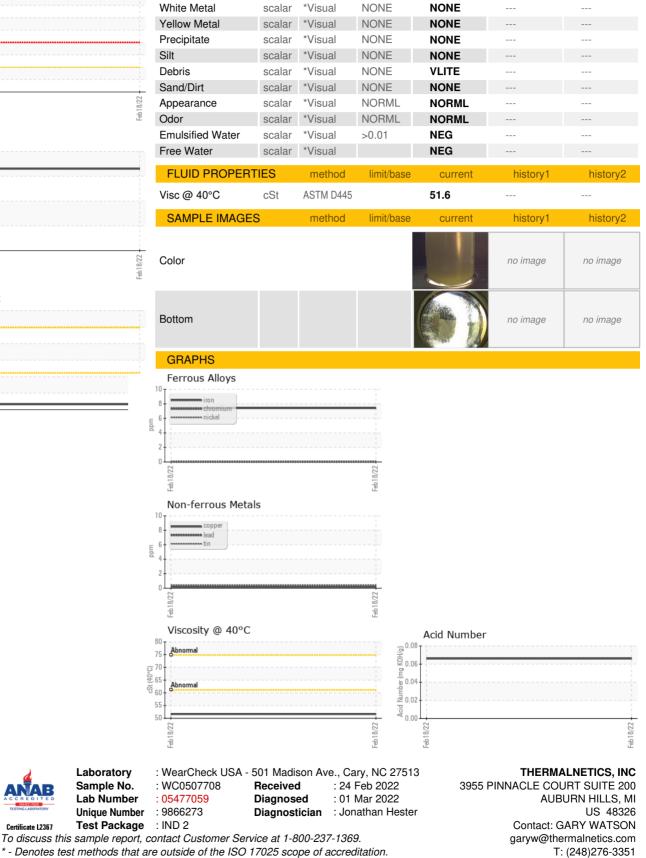

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: