




# PROBLEM SUMMARY

Sample Rating Trend

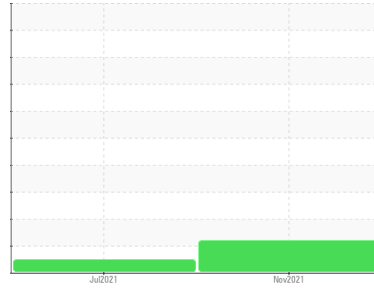

ISO




Machine Id  
**6988178 (S/N 1271)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

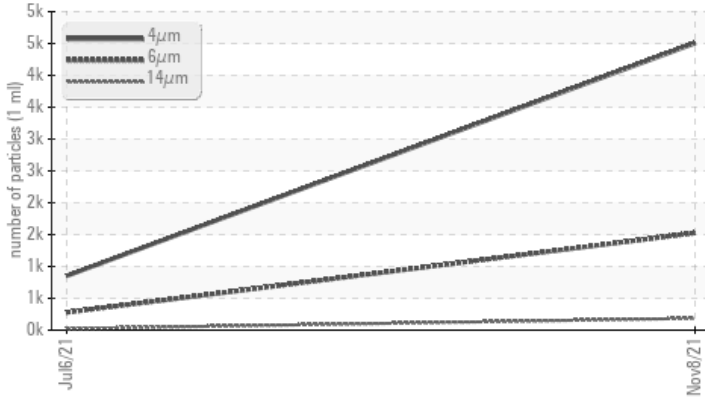

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	---
Particles >6µm	ASTM D7647	>1300	▲ 1525	278	---
Particles >14µm	ASTM D7647	>80	▲ 186	23	---
Particles >21µm	ASTM D7647	>20	▲ 48	5	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 18/15	15/12	---

Customer Id: AZOANN  
Sample No.: KC95487  
Lab Number: 05485073  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

**06 Jul 2021 Diag: Doug Bogart**

NORMAL



Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data updates. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

## Sample Rating Trend

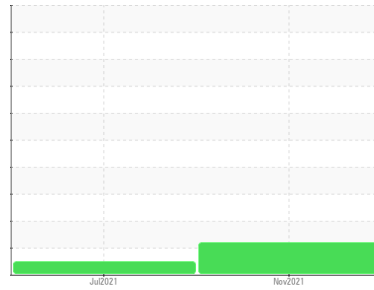

ISO



Machine Id  
**6988178 (S/N 1271)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC95487</b>	KC98019	---
Sample Date	Client Info			<b>08 Nov 2021</b>	06 Jul 2021	---
Machine Age	hrs	Client Info		<b>10786</b>	8585	---
Oil Age	hrs	Client Info		<b>4500</b>	6000	---
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Antimony	ppm	ASTM D5185m		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	<1	---
Barium	ppm	ASTM D5185m	90	<b>14</b>	31	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	90	<b>62</b>	68	---
Calcium	ppm	ASTM D5185m	2	<b>0</b>	2	---
Phosphorus	ppm	ASTM D5185m		<b>5</b>	5	---
Zinc	ppm	ASTM D5185m		<b>0</b>	0	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>25</b>	23	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	---
Water	%	ASTM D6304	>0.05	<b>0.011</b>	0.031	---
ppm Water	ppm	ASTM D6304	>500	<b>114.4</b>	313.2	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>4506</b>	852	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 1525</b>	278	---
Particles >14µm		ASTM D7647	>80	<b>▲ 186</b>	23	---
Particles >21µm		ASTM D7647	>20	<b>▲ 48</b>	5	---
Particles >38µm		ASTM D7647	>4	<b>4</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>▲ 18/15</b>	15/12	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.26</b>	0.310	---


# OIL ANALYSIS REPORT

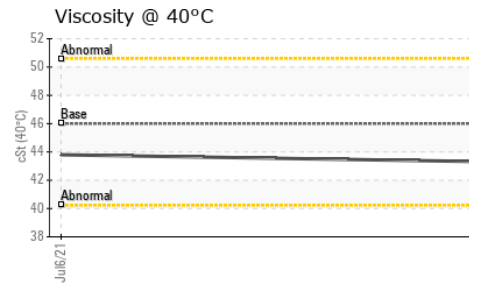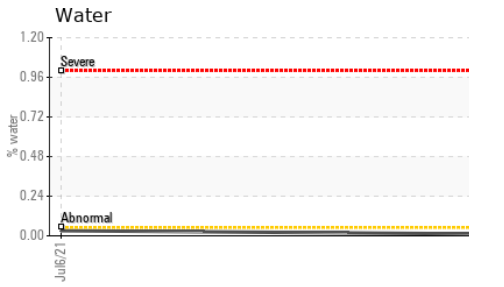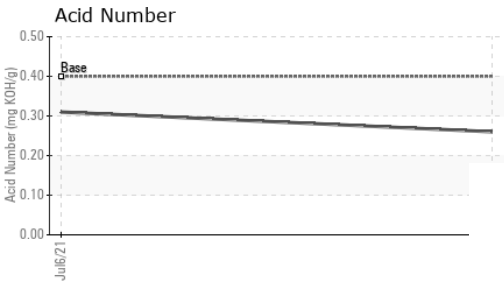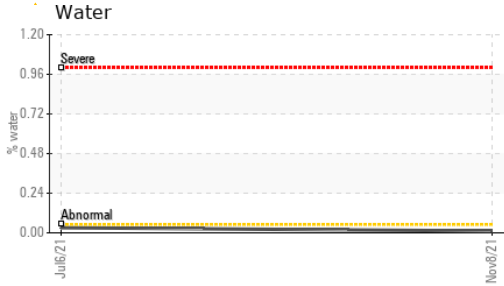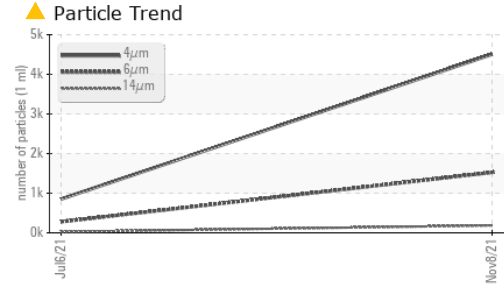






PARAMETER	VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>VLITE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 40°C	cSt	ASTM D445 46	<b>43.3</b>	43.8	---

PARAMETER	method	limit/base	current	history1	history2
SAMPLE IMAGES					

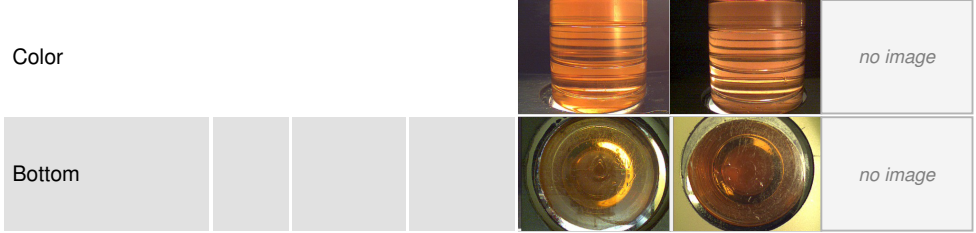

## GRAPHS

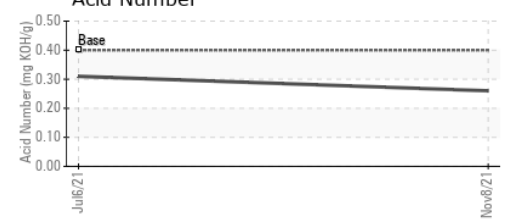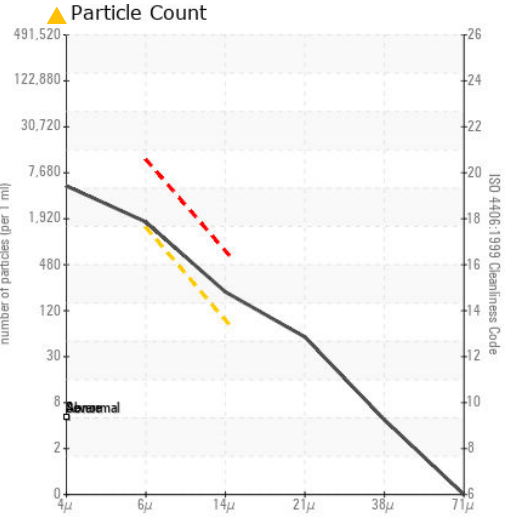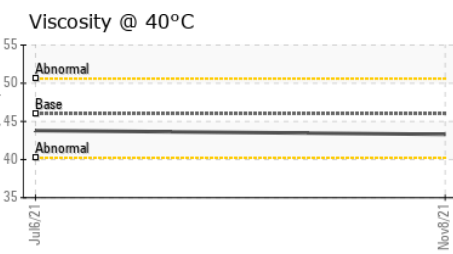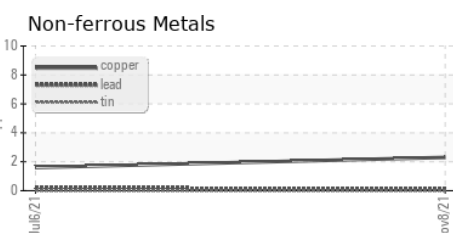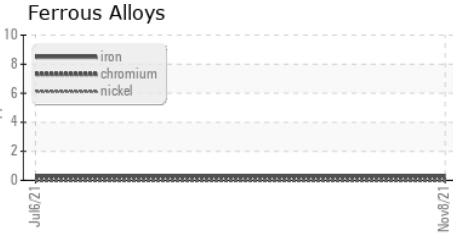

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC95487  
**Lab Number** : 05485073  
**Unique Number** : 9879292  
**Test Package** : IND 2

**Received** : 07 Mar 2022  
**Diagnosed** : 09 Mar 2022  
**Diagnostician** : Don Baldrige

**AZOTH**  
 1099 HIGHLAND DR  
 ANN ARBOR, MI  
 US 48108  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)