




# OIL ANALYSIS REPORT

Sample Rating Trend

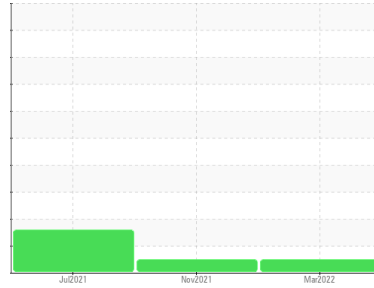

**NORMAL**



Area  
**(LLC9798) [MN 19691]**  
 Machine Id  
**Terrie 2020**  
 Component  
**Gasoline Engine**  
 Fluid  
**KENDALL 10W30 (5 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0681995</b>	WC0574489	WC0606621
Sample Date	Client Info			<b>11 Mar 2022</b>	09 Nov 2021	13 Jul 2021
Machine Age	mls	Client Info		<b>15679</b>	10518	5405
Oil Age	mls	Client Info		<b>5161</b>	5113	5405
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>5</b>	6	12
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>3</b>	5	6
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	3	1
Copper	ppm	ASTM D5185m	>155	<b>3</b>	11	44
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	2	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>24</b>	20	83
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>45</b>	62	123
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m		<b>339</b>	363	340
Calcium	ppm	ASTM D5185m		<b>1082</b>	1151	1213
Phosphorus	ppm	ASTM D5185m		<b>568</b>	612	621
Zinc	ppm	ASTM D5185m		<b>603</b>	652	715
Sulfur	ppm	ASTM D5185m		<b>1740</b>	1855	2334



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>23</b>	44	▲ 116
Sodium	ppm	ASTM D5185m	>400	<b>&lt;1</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.6</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	10	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	19.2	21

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.9</b>	12.3	13.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.5</b>	---	---







# OIL ANALYSIS REPORT

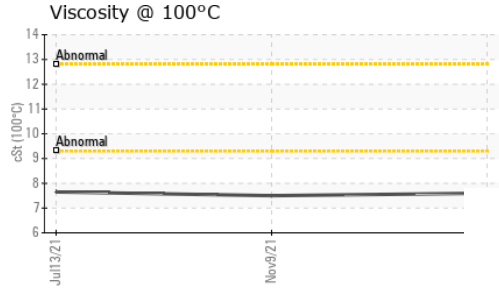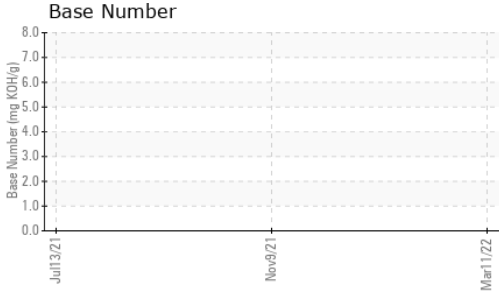

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>7.6</b>	7.5	7.65

## GRAPHS

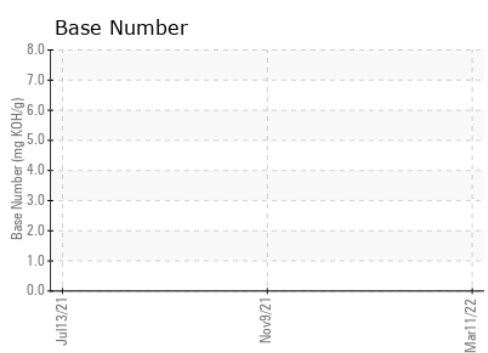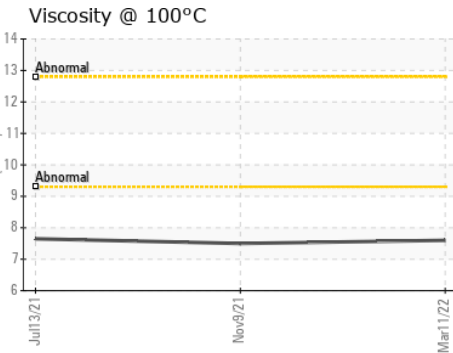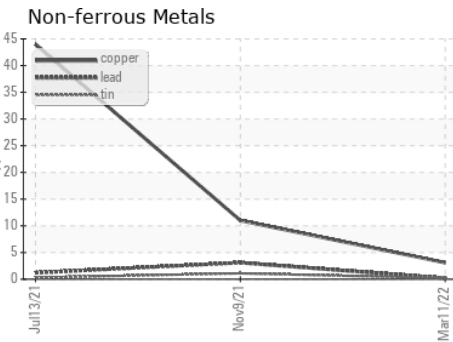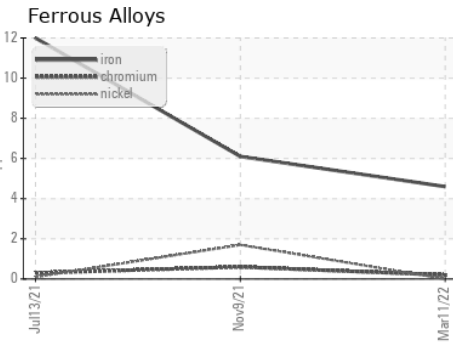

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0681995 **Received** : 16 Mar 2022  
**Lab Number** : **05493201** **Diagnosed** : 18 Mar 2022  
**Unique Number** : 9892421 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**WEARCHECK USA**  
 501 Madison Ave  
 Cary, NC  
 US 27513  
 Contact: CATHERINE ANASTASIO  
 CANASTASIO@WEARCHECKUSA.COM  
 T:  
 F: (919)379-4050

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)