




OIL ANALYSIS REPORT

Sample Rating Trend

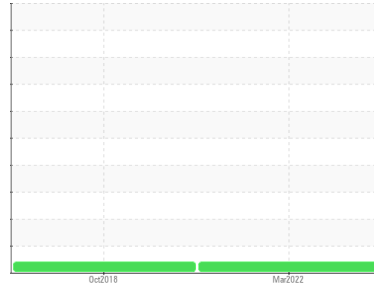

ISO



Area
GUAY SON
 Machine Id
IBACO LOPEZ VENTURA
 Component
Transmission (Manual)
 Fluid
Raloy SAE 50 (23 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0009167	KL04586808	---
Sample Date	Client Info		23 Mar 2022	08 Oct 2018	---
Machine Age	hrs	Client Info	1000	1500	---
Oil Age	hrs	Client Info	1000	653	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	8	32	---
Chromium	ppm	ASTM D5185m >5	0	<1	---
Nickel	ppm	ASTM D5185m >5	0	<1	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m >7	<1	0	---
Aluminum	ppm	ASTM D5185m >25	1	<1	---
Lead	ppm	ASTM D5185m >45	0	0	---
Copper	ppm	ASTM D5185m >225	4	188	---
Tin	ppm	ASTM D5185m >10	0	0	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	2	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	<1	2	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	4	33	---
Calcium	ppm	ASTM D5185m	3798	3204	---
Phosphorus	ppm	ASTM D5185m	942	808	---
Zinc	ppm	ASTM D5185m	983	955	---
Sulfur	ppm	ASTM D5185m	4831	7624	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	7	7	---
Sodium	ppm	ASTM D5185m	2	1	---
Potassium	ppm	ASTM D5185m >20	0	<1	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		117089	35773	---
Particles >6µm	ASTM D7647	>2500	▲ 6984	▲ 6369	---
Particles >14µm	ASTM D7647	>320	71	190	---
Particles >21µm	ASTM D7647	>80	9	34	---
Particles >38µm	ASTM D7647	>20	0	2	---
Particles >71µm	ASTM D7647	>4	0	0	---
Oil Cleanliness	ISO 4406 (c)	>18/15	▲ 20/13	▲ 20/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.13	0.746	---




OIL ANALYSIS REPORT

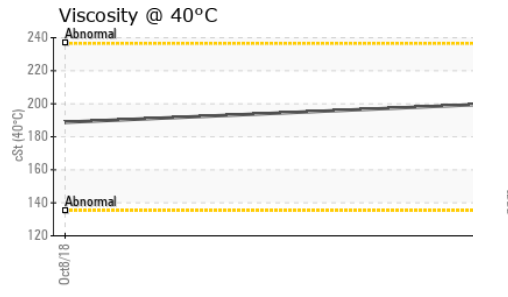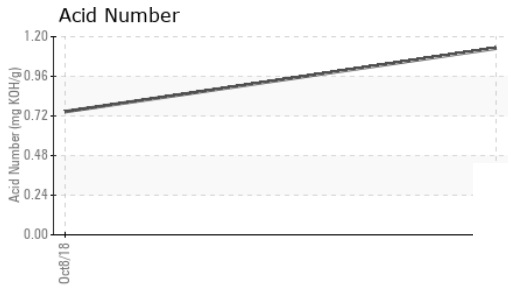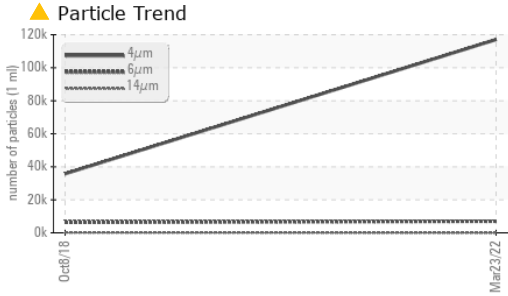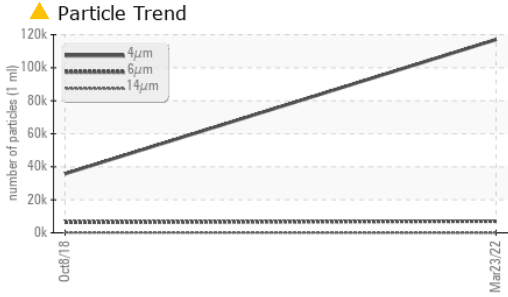






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	200	188.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

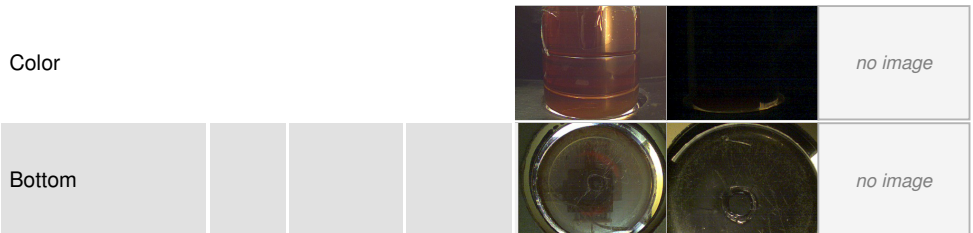

GRAPHS

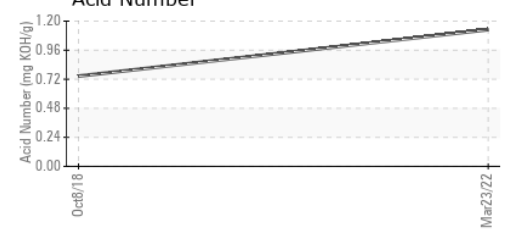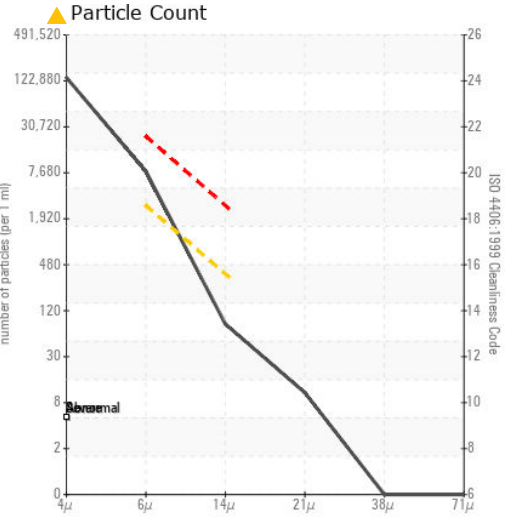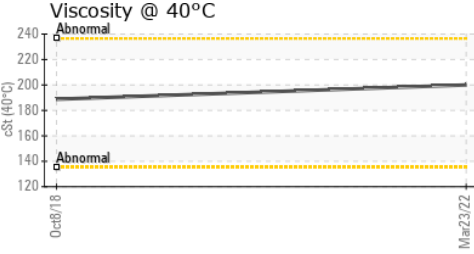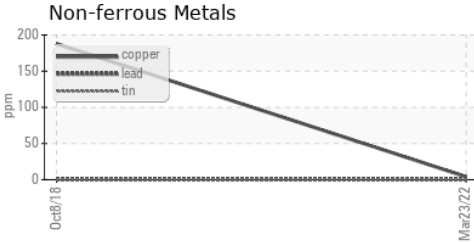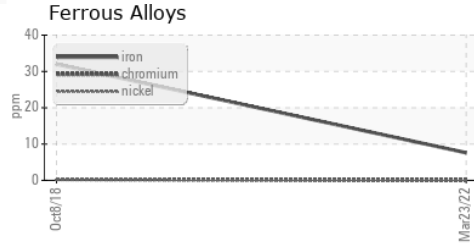

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0009167 **Received** : 30 Mar 2022
Lab Number : 05505909 **Diagnosed** : 31 Mar 2022
Unique Number : 9915183 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: PrtCount)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)