


OIL ANALYSIS REPORT



ISO



KAESER 7370207

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			2021	Apr2021 May20		
SAMPLE INFORM	MATION	method	limit/base	current	" history1	history2
Sample Number		Client Info		KC95136	KC86331	KC91490
Sample Date		Client Info		09 May 2022	28 Apr 2021	04 Jan 2021
Machine Age	hrs	Client Info		6263	3262	2275
Oil Age	hrs	Client Info		0	1000	2275
Oil Changed	0	Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	4	2	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	23	0	34
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	6	0	5
Zinc	ppm	ASTM D5185m	0	44	0	35
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	<1	1
Sodium	ppm	ASTM D5185m		3	7	13
Potassium	ppm	ASTM D5185m	>20	0	7	9
Water	%	ASTM D6304	>0.05	0.011	0.026	0.015
ppm Water	ppm	ASTM D6304	>500	117.6	264.7	155.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4142	6565	11674
Particles >6µm		ASTM D7647	>1300	1404	<u>^</u> 2352	△ 4547
Particles >14µm		ASTM D7647	>80	114	▲ 309	▲ 706
Particles >21µm		ASTM D7647	>20	16	<u></u> 94	<u>^</u> 211
Particles >38µm		ASTM D7647	>4	0	2	▲ 11
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/18/14	△ 18/15	1 9/17
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Asid Number (ANI)	ma 1/011/-	ACTM DOGGE	1.0	0.44	0.416	0.041

Acid Number (AN)

mg KOH/g ASTM D8045 1.0


0.416

0.44

0.341



OIL ANALYSIS REPORT

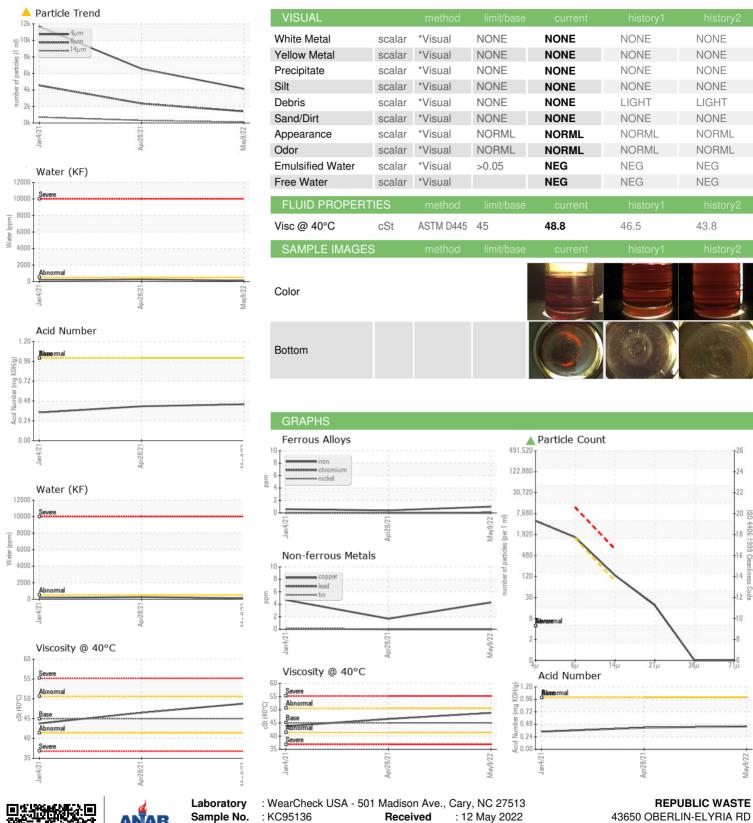



Certificate L2367

Sample No. Lab Number

: KC95136

: 05543246 Unique Number : 9972536 Test Package : IND 2

Tested Diagnosed

: 16 May 2022

: 16 May 2022 - Angela Borella

43650 OBERLIN-ELYRIA RD

OBERLIN, OH US 44014

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: