




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

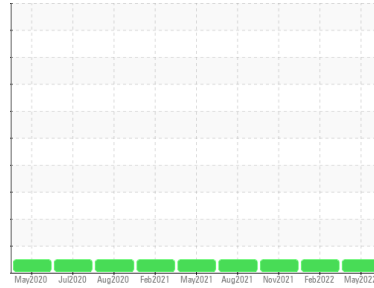

Area
97
Machine Id
[97] A97 B114
Component
Center Compressor
Fluid
COMP LIFE 100 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			HPL0000438	HPL0000066	HPL0000078
Sample Date	Client Info			16 May 2022	23 Feb 2022	17 Nov 2021
Machine Age	hrs	Client Info		13972	12426	10658
Oil Age	hrs	Client Info		6152	4606	2838
Oil Changed	Client Info			Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	3	2	0
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m		<1	1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		3	0	0
Aluminum	ppm	ASTM D5185m	>15	1	2	<1
Lead	ppm	ASTM D5185m	>65	<1	<1	0
Copper	ppm	ASTM D5185m	>65	2	1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m		---	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0



ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		<1	0	17
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		1	<1	0
Magnesium	ppm	ASTM D5185m		1	<1	0
Calcium	ppm	ASTM D5185m		31	48	181
Phosphorus	ppm	ASTM D5185m		177	206	13
Zinc	ppm	ASTM D5185m		8	0	0
Sulfur	ppm	ASTM D5185m		17036	16965	18052

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>35	1	1	<1
Sodium	ppm	ASTM D5185m		1	4	2
Potassium	ppm	ASTM D5185m	>20	<1	3	<1

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.56	0.590	0.223

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG









OIL ANALYSIS REPORT

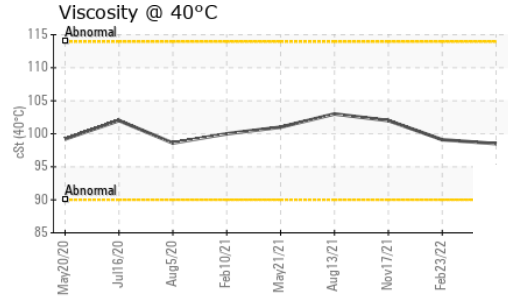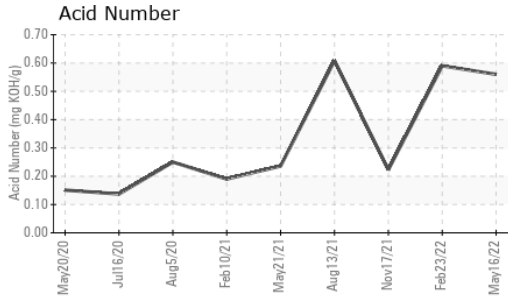

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445		98.5	99.1	102

SAMPLE IMAGES		method	limit/base	current	history 1	history 2
Color				no image	no image	
Bottom				no image	no image	

GRAPHS

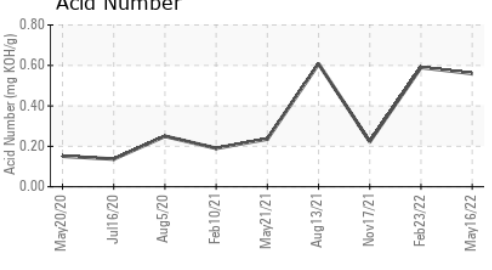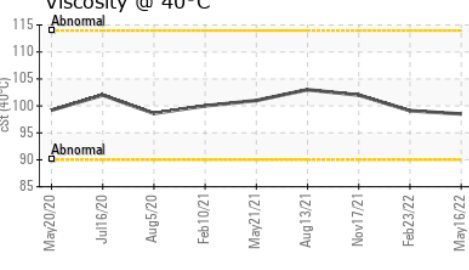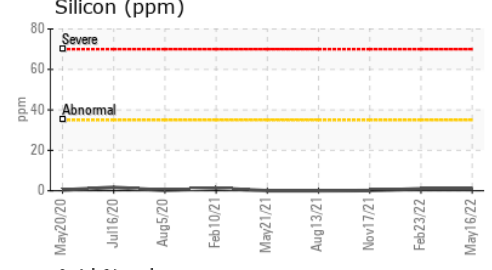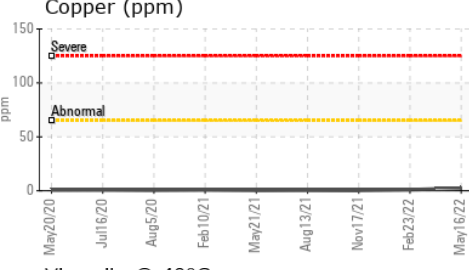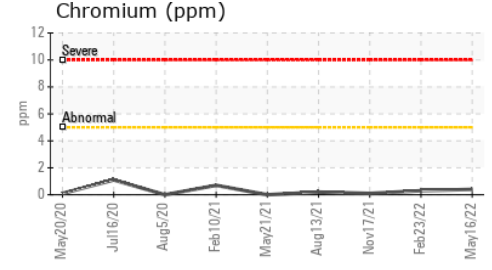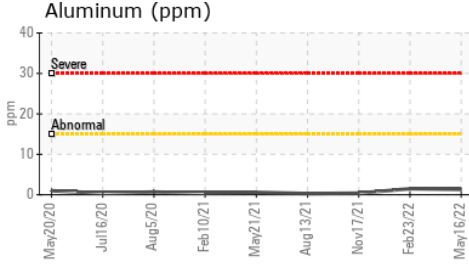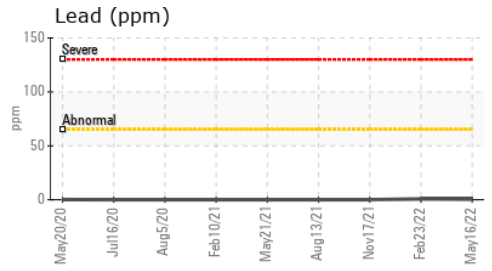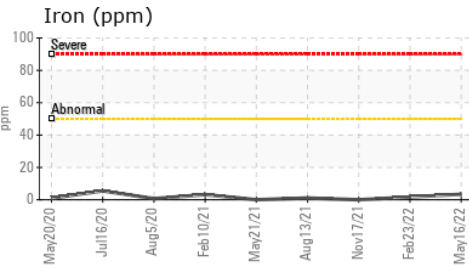

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0000438 **Received** : 19 May 2022
Lab Number : **05549264** **Diagnosed** : 20 May 2022
Unique Number : 9983631 **Diagnostician** : Angela Borella
Test Package : MOB 2

KENSING
 2525 S KENSINGTON RD
 KANKAKEE, IL
 US 60901
 Contact: TIM HUBERT
 timothy.hubert@kensingsolutions.com
 T: (815)939-8918
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)