


PROBLEM SUMMARY


Sample Rating Trend

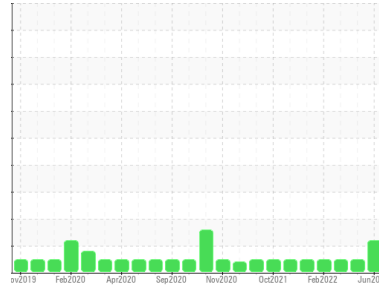

Machine Id
WHITE
Component
Reciprocating Compressor
Fluid
TULCO LUBSOIL IND MP R&O 150 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

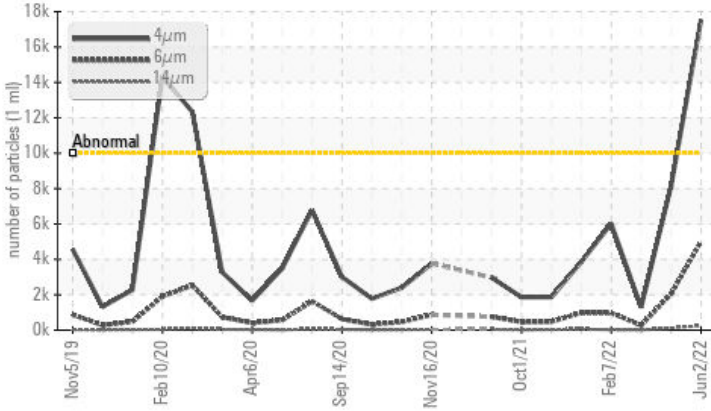

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	NORMAL	NORMAL
Particles >4µm	ASTM D7647	>10000	▲ 17519	8144	1297
Particles >6µm	ASTM D7647	>2500	▲ 4999	2050	273
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 21/19/15	20/18/14	17/15/11

Customer Id: CAMFORAR
Sample No.: TO70000006
Lab Number: 05573175
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

02 May 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



04 Apr 2022 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



07 Feb 2022 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report



Machine Id
WHITE

Component
Reciprocating Compressor

Fluid
TULCO LUBSOIL IND MP R&O 150 (--- GAL)

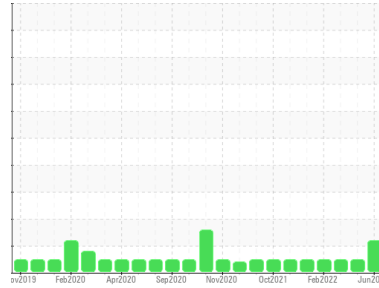

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO70000006	TO70000003	TO70000001
Sample Date	Client Info	02 Jun 2022	02 May 2022	04 Apr 2022
Machine Age	wks Client Info	0	0	0
Oil Age	wks Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	0	<1	0
Chromium	ppm ASTM D5185m >10	0	0	0
Nickel	ppm ASTM D5185m	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	0	<1
Aluminum	ppm ASTM D5185m >25	<1	0	<1
Lead	ppm ASTM D5185m >25	0	0	0
Copper	ppm ASTM D5185m >50	0	0	<1
Tin	ppm ASTM D5185m >15	0	0	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	<1	<1
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	0	0	0
Manganese	ppm ASTM D5185m	0	0	0
Magnesium	ppm ASTM D5185m 0	0	0	0
Calcium	ppm ASTM D5185m 0	0	0	<1
Phosphorus	ppm ASTM D5185m 0	20	20	22
Zinc	ppm ASTM D5185m 0	10	5	4
Sulfur	ppm ASTM D5185m 2400	2193	1964	2309

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	5	5
Sodium	ppm ASTM D5185m	0	0	0
Potassium	ppm ASTM D5185m >20	0	0	0
Water	% ASTM D6304 >0.1	0.007	0.00	0.001
ppm Water	ppm ASTM D6304 >1000	78.5	0.00	5.7






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ 17519	8144	1297
Particles >6µm	ASTM D7647 >2500	▲ 4999	2050	273
Particles >14µm	ASTM D7647 >320	254	109	14
Particles >21µm	ASTM D7647 >80	36	23	2
Particles >38µm	ASTM D7647 >20	2	0	0
Particles >71µm	ASTM D7647 >4	1	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/15	▲ 21/19/15	20/18/14	17/15/11

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.067	0.041	0.17

OIL ANALYSIS REPORT

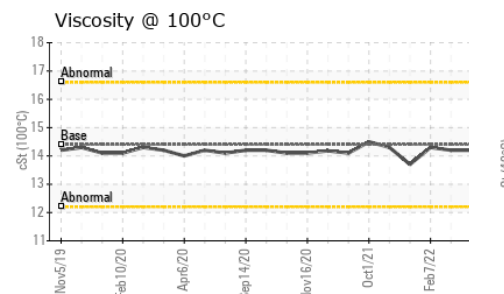
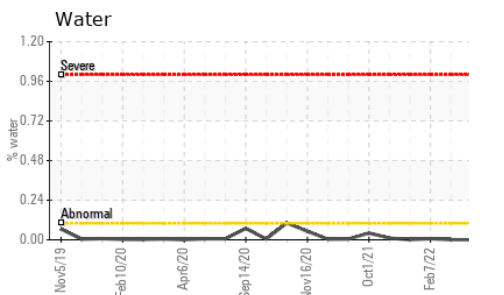
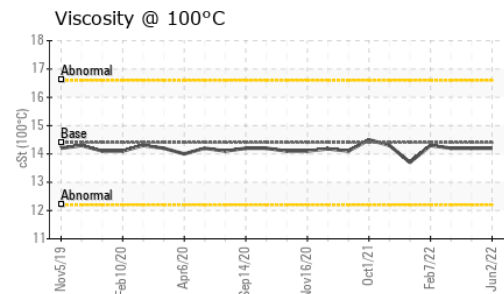
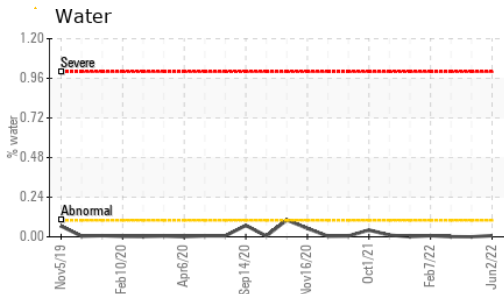
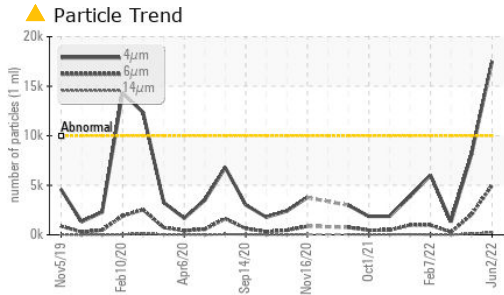


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	142	142
Visc @ 100°C	cSt	ASTM D445	14.4	14.2	14.2
Viscosity Index (VI)	Scale	ASTM D2270	92	97	97

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

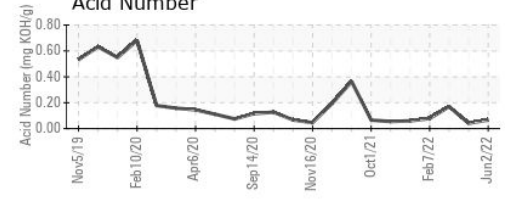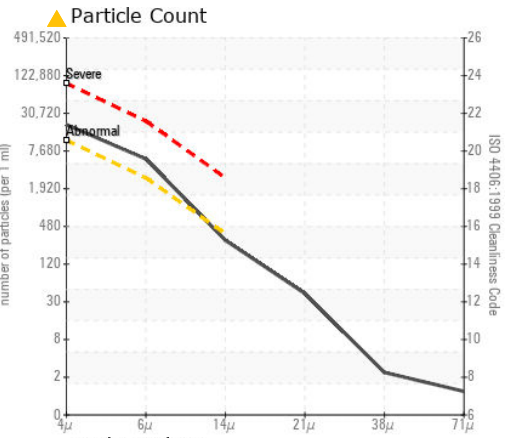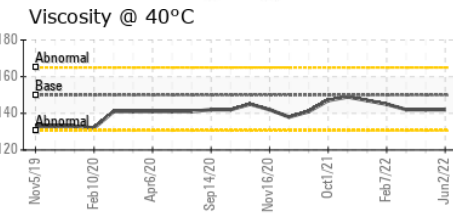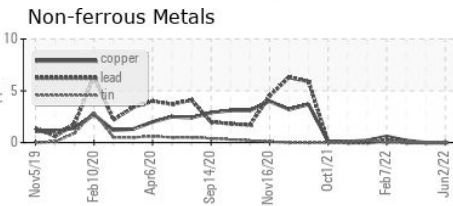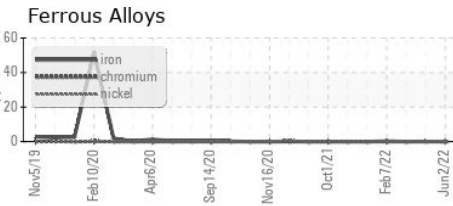

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO70000006 **Received** : 21 Jun 2022
Lab Number : 05573175 **Diagnosed** : 22 Jun 2022
Unique Number : 10022592 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

CAMBRIAN ENERGY-SOUTH TEX FT. SMITH TREATERS
 5950 COMMERCE RD
 FORT SMITH, AR
 US 72916
 Contact: DUSTIN FRY
 dustin@morrowenergy.com
 T: (479)221-7571
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)