




GREASE ANALYSIS

Sample Rating Trend

NORMAL

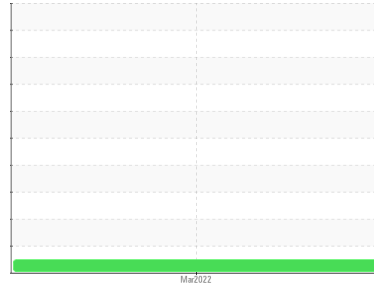

Area
DAKOTA RANGE III [200006928]
 Machine Id
13WEA87751 - C-02

Component
Front Grease
 Fluid
MOBIL SHC GREASE 460 WT (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Grease Condition

The condition of the greases additive package is suitable for further service.

Contaminants

Insufficient sample was received to conduct all the routine laboratory tests. There is no indication of any contamination in the grease.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			NX05576094	---	---
Sample Date	Client Info			02 Mar 2022	---	---
Machine Age	hrs	Client Info		4483	---	---
Grease Age	hrs	Client Info		0	---	---
Grease Serviced	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>250	293	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>75	122	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		107	---	---
Magnesium	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		555	---	---
Phosphorus	ppm	ASTM D5185m		85	---	---
Zinc	ppm	ASTM D5185m		114	---	---

THICKENER/SOAP		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m		6	---	---
Barium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		31	---	---
Sodium	ppm	ASTM D5185m		20	---	---
Lithium	ppm	ASTM D5185m		2981	---	---
Sulfur	ppm	ASTM D5185m		3283	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>150	24	---	---
Potassium	ppm	ASTM D5185m		2	---	---

GREASE CONDITION		method	limit/base	current	history1	history2
Grease Color		*Visual	Red	Red	---	---
Texture		*In-house		Buttery	---	---
NLGI Consistency	NLGI Scale	*SKF Method	1.5	2	---	---

GREASE ANALYSIS

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

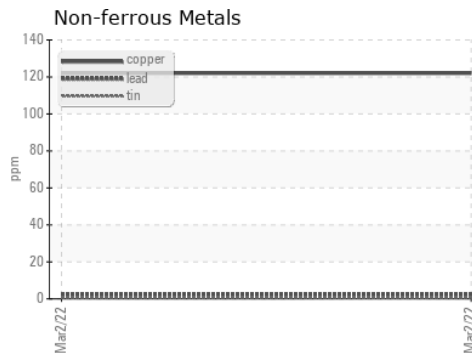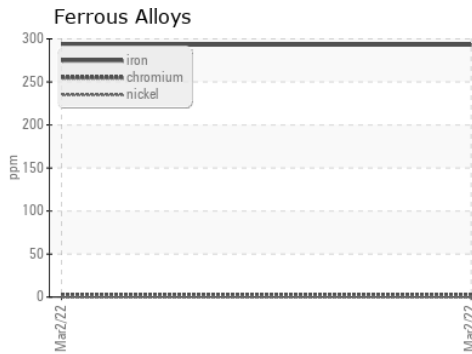

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX05576094 **Received** : 23 Jun 2022
Lab Number : 05576094 **Diagnosed** : 05 Jul 2022
Unique Number : 10025511 **Diagnostician** : Doug Bogart
Test Package : GRS 1 (Additional Tests: KV40, SCREEN)

NORDEX USA - Chicago
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606
 Contact: DEVIN LINEHAN
 DLinehan@nordex-online.com
 T: (312)386-4124
 F: (312)386-7102

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)