


PROBLEM SUMMARY

Sample Rating Trend	VISCOSITY
Mar/2022	

Machine Id **4 KAESER** Component **Compressor** Fluid NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

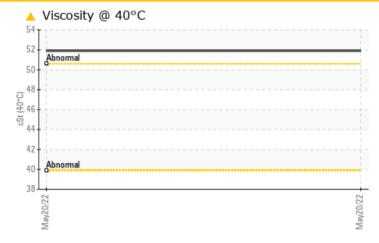

RECOMMENDATION

The oil is near the end of it's useful service life, recommend schedule an oil change. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC T	EST RE	SULTS		
Sample Status			ABNORMAL	
Visc @ 40°C	cSt	ASTM D445	<u> </u>	

Customer Id: DARWAXTX Sample No.: RP05578884 Lab Number: 05578884 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: System Automation +1 905-569-8600 x230 Kevin.Marson@wearcheck.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Service/change Fluid			?	The oil is near the end of it's useful service life, recommend schedule an oil change.	
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.	

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **4 KAESER** Component **Compressor** Fluid **NOT GIVEN (--- GAL)**

DIAGNOSIS

Recommendation

The oil is near the end of it's useful service life, recommend schedule an oil change. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is at the top-end of the recommended limit.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP05578884		
Sample Date		Client Info		20 May 2022		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		55		
Zinc	ppm	ASTM D5185m		0		
-	ppiii	ASTIM DSTOSIII		Ū		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		2.81		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
	scalar	*Visual	NONE	NONE		
Sand/Dirt						
	scalar	*Visual	NORML	NORML		
Sand/Dirt Appearance Odor	scalar	*Visual *Visual		-		
Appearance			NORML >0.05	NORML NORML NEG		



OIL ANALYSIS REPORT

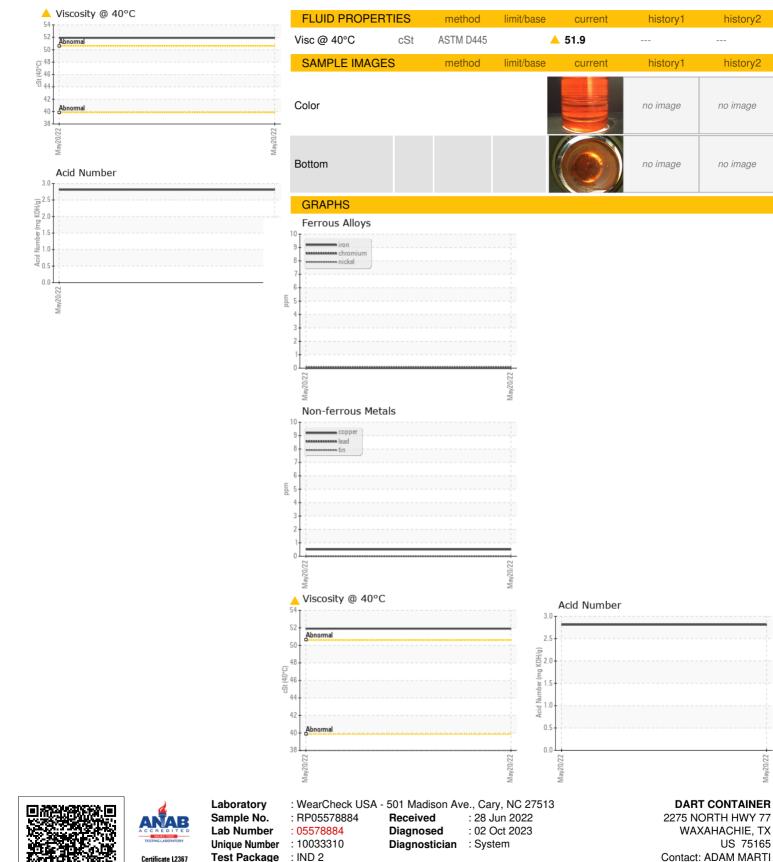

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 75165

T:

F:

WAXAHACHIE, TX

adam.marti@dart.biz

history2

history2

no image

no image