


OIL ANALYSIS REPORT

VICAM [VICAM] SCREEN CHANGER A-LINE

Hydraulic System

CHEVRON HYDRAULIC OIL AW ISO 46 (5 GAL)





DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition. Advise you send the oil filter for a more detailed analysis of the wear situation that is occurring in this component.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil. Sample is layered with different type/density


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

GAL)			May2021	Jun 2022		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KFS0001606	KFS0000431	
Sample Date		Client Info		28 Jun 2022	19 May 2021	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	1	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	0	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		0	<1	
Aluminum	ppm	ASTM D5185m	>20	0	<1	
Lead	ppm	ASTM D5185m	>20	<1	<1	
Copper	ppm	ASTM D5185m	>20	3	5	
Tin	ppm	ASTM D5185m	>20	0	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		0	<1	
Calcium	ppm	ASTM D5185m		34	16	
Phosphorus	ppm	ASTM D5185m		264	119	
Zinc	ppm	ASTM D5185m		273	140	
Sulfur	ppm	ASTM D5185m		1336	1189	
CONTAMINANTS	8	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	
Sodium	ppm	ASTM D5185m		<1	<1	
Potassium	ppm	ASTM D5185m	>20	0	0	
Water	%	ASTM D6304	>0.05	NEG	NEG	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	<u>▲</u> 66485		
Particles >6μm		ASTM D7647	>320	<u> </u>		
Particles >14µm		ASTM D7647	>80	▲ 625		
Particles >21µm		ASTM D7647		<u> 176</u>		
Particles >38µm		ASTM D7647	>4	<u>^</u> 24		
Particles >71μm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<u>A</u> 23/21/16		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.33	0.188	



OIL ANALYSIS REPORT

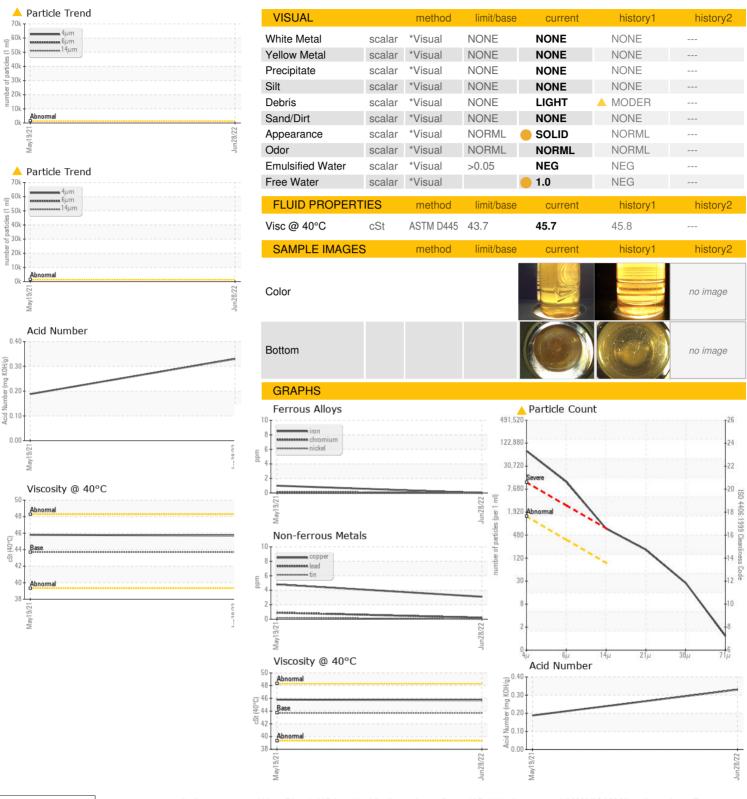





Certificate L2367

Laboratory Sample No. Lab Number

: KFS0001606

: 05581965 Unique Number: 10036391 Test Package : PLANT

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 01 Jul 2022

Tested : 05 Jul 2022 : 05 Jul 2022 - Jonathan Hester Diagnosed

VIAM/VICAM Manufacturing - Tennessee 87 Parktower Road

Manchester, TN US 37355

Contact: Eric Thompson ethompson@viammfg.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (931)461-2300 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: