

PROBLEM SUMMARY

Sample Rating Trend

ISO


KAESER 7392924

Component

Compressor

NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

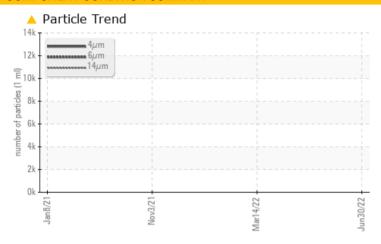

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | | |
|--------------------------|--------------|---------|------------------|----------|----------|--|--|--|--|
| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL | | | | |
| Particles >6μm | ASTM D7647 | >1300 | △ 3540 | | | | | | |
| Particles >14μm | ASTM D7647 | >80 | 299 | | | | | | |
| Particles >21µm | ASTM D7647 | >20 | <u>^</u> 71 | | | | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | 2 1/19/15 | | | | | | |

Customer Id: AMAKER Sample No.: KCP40620 Lab Number: 05584188 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

14 Mar 2022 Diag: Jonathan Hester

VIS DEBRIS



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



03 Nov 2021 Diag: Doug Bogart

VIS DEBRIS



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



08 Jan 2021 Diag: Jonathan Hester

WAIER




Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT



ISO



KAESER 7392924

Component

Compressor

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Jan202 | 1 Nov2021 | Mar2022 J | ın2022 | |
|-----------------|--------|--------------|------------|---------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCP40620 | KCP41023 | KCP39278 |
| Sample Date | | Client Info | | 30 Jun 2022 | 14 Mar 2022 | 03 Nov 2021 |
| Machine Age | hrs | Client Info | | 7142 | 5813 | 3895 |
| Oil Age | hrs | Client Info | | 1300 | 2000 | 1200 |
| Oil Changed | | Client Info | | Not Changd | Not Changd | Changed |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | <1 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 3 | 2 | 3 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | <1 | 1 | 0 |
| Barium | ppm | ASTM D5185m | | 51 | 64 | 50 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | | 78 | 89 | 80 |
| Calcium | ppm | ASTM D5185m | | 2 | 3 | 2 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 1 | <1 |
| Zinc | ppm | ASTM D5185m | | 5 | 4 | 8 |
| Sulfur | ppm | ASTM D5185m | | 23567 | 17367 | 18235 |
| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | <1 | 2 |
| Sodium | ppm | ASTM D5185m | | 18 | 18 | 30 |
| Potassium | ppm | ASTM D5185m | >20 | 7 | 5 | 8 |
| Water | % | ASTM D6304 | >0.05 | 0.034 | 0.028 | 0.027 |
| ppm Water | ppm | ASTM D6304 | >500 | 349.6 | 287.1 | 271.9 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 12982 | | |
| Particles >6µm | | ASTM D7647 | >1300 | ^ 3540 | | |
| Particles >14μm | | ASTM D7647 | >80 | <u>^</u> 299 | | |
| Particles >21μm | | ASTM D7647 | >20 | <u>^</u> 71 | | |
| Particles >38μm | | ASTM D7647 | >4 | 1 | | |
| Particles >71μm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u> </u> | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| | | | | | | |


Acid Number (AN)

mg KOH/g ASTM D8045

0.36 0.313 Contact/Location: B. LANCRON - AMAKER



OIL ANALYSIS REPORT

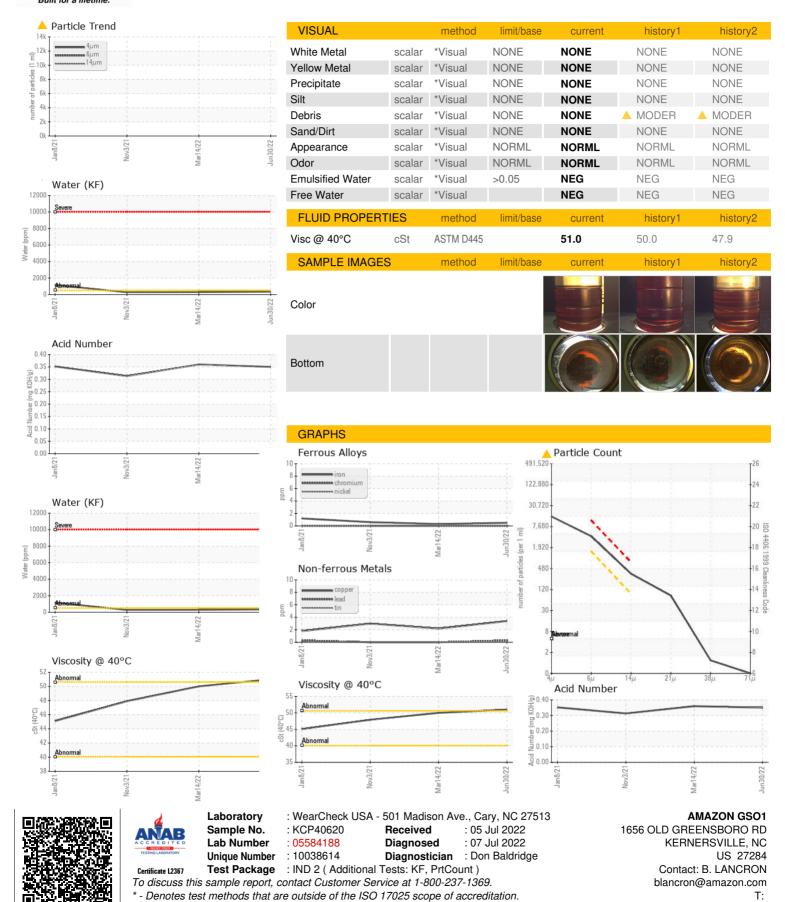

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: