



PROBLEM SUMMARY

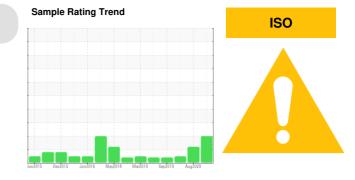

KAESER C-1 (S/N 1044)

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

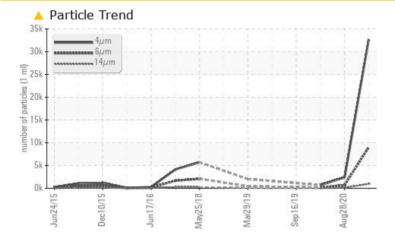

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS NORMAL Sample Status ABNORMAL ATTENTION Particles >6µm ASTM D7647 >1300 8985 678 126 Particles >14µm ASTM D7647 >80 960 **1**09 8 ASTM D7647 >20 2 Particles >21µm 388 Particles >38µm ASTM D7647 >4 **1**2 0 **Oil Cleanliness** ISO 4406 (c) >--/17/13 🔺 22/20/17 🔺 18/17/14 17/14/10

Customer Id: WESLONWC Sample No.: WC0710517 Lab Number: 05585951 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



28 Aug 2020 Diag: Doug Bogart

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



07 May 2020 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

16 Sep 2019 Diag: Jonathan Hester





We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report







OIL ANALYSIS REPORT

Machine Id KAESER C-1 (S/N 1044) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

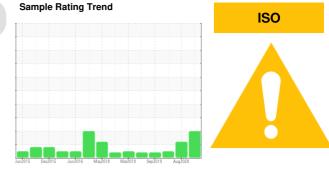



SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		WC0710517	WCI2335362	WC0465728
Sample Date		Client Info		29 Jun 2022	28 Aug 2020	07 May 2020
Machine Age	hrs	Client Info		38478	34562	32046
Oil Age	hrs	Client Info		8000	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				ABNORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m		0	0	<1
Copper	ppm	ASTM D5185m		3	5	4
Tin	ppm	ASTM D5185m		0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	pp	method	limit/base	current	history 1	history 2
Boron	2222	ASTM D5185m		2	10	<1
Barium	ppm	ASTM D5185m	00	0	4	0
	ppm	ASTM D5185m	90	0	4	0
Molybdenum Manganese	ppm ppm	ASTM D5185m		0	0	0
-		ASTM D5185m	90	0	0	0
Magnesium Calcium	ppm ppm	ASTM D5185m		0	0	<1
		ASTM D5185m	2	26	1	2
Phosphorus Zinc	ppm	ASTM D5185m		<1	0	0
Sulfur	ppm	ASTM D5185m		18025	12850	8094
	ppm					
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1	<1	2
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
FLUID CLEANLIN	NESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		32662	2364	683
Particles >6µm		ASTM D7647	>1300	<u> </u>	678	126
Particles >14µm		ASTM D7647	>80	<u> </u>	1 09	8
Particles >21µm		ASTM D7647	>20	<mark>/</mark> 388	<u> </u>	2
Particles >38µm		ASTM D7647	>4	<u> </u>	<u> </u>	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/20/17	▲ 18/17/14	17/14/10
FLUID DEGRAD	ATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.42	0.464	0.584



OIL ANALYSIS REPORT

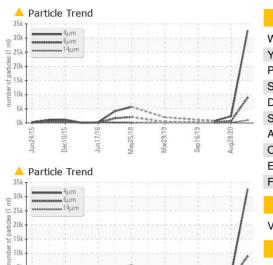



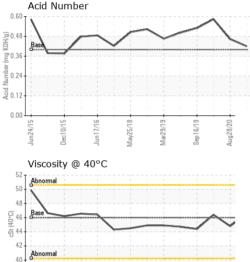

Jun17/16


38

Jun24/15

Dec10/15

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	VLITE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	46.5	44.8	46.4
SAMPLE IMAGES	method	limit/base	current	history 1	history 2	
Color						
Bottom						



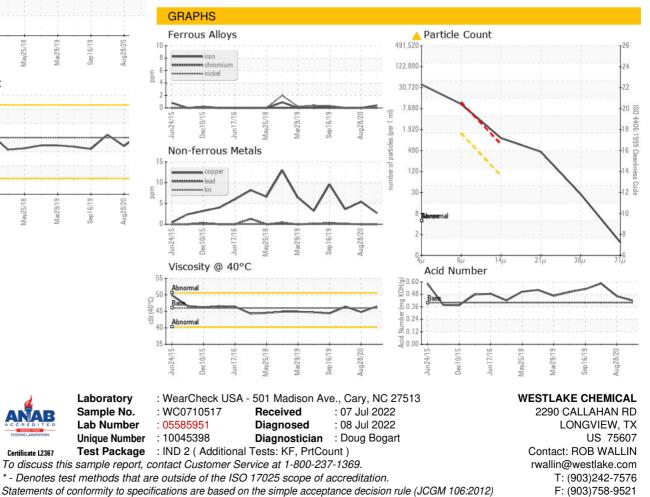

Contact/Location: ROB WALLIN - WESLONWC