

PROBLEM SUMMARY


MELT SHOP **ECOSAFE S3 DU 46 TOTE 1**

Component New (Unused) Oil

{not provided} (--- QTS)



COMPONENT CONDITION SUMMARY

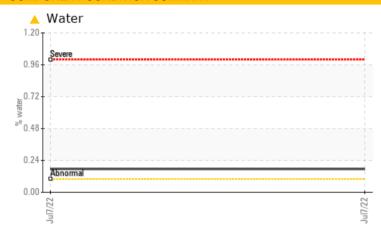

RECOMMENDATION

This is a baseline read-out on the submitted sample.

| PROBLEMATIC TEST RESULTS | | | | | | | | | |
|--------------------------|-----|------------|----------------|--|--|--|--|--|--|
| Sample Status | | | MARGINAL | | | | | | |
| Water | % | ASTM D6304 | △ 0.175 | | | | | | |
| ppm Water | ppm | ASTM D6304 | 1759.4 | | | | | | |

Customer Id: OUTCALAL Sample No.: RP0028758 Lab Number: 05586977 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Oil Age

PQ

Iron

Nickel

Silver

Lead

Tin

Copper

Cadmium

Boron

Barium

Calcium

Zinc

Titanium

Aluminum

Sample Rating Trend

WATER



MELT SHOP **ECOSAFE S3 DU 46 TOTE 1**

New (Unused) Oil

{not provided} (--- QTS)


DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

Contamination

There is a trace of moisture present in the oil.

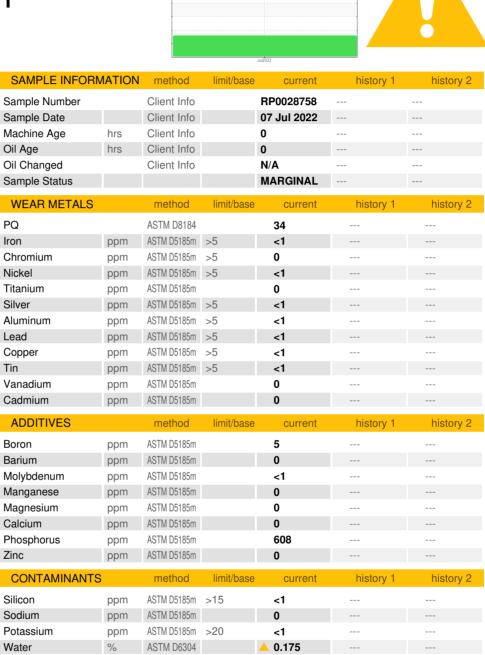


| Silicon | ppm | ASTM D5185m | >15 | <1 | | |
|--|------|--|-----------------------------|---------------|-----------|-----------|
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| Water | % | ASTM D6304 | | <u> </u> | | |
| ppm Water | ppm | ASTM D6304 | | 1759.4 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history 1 | history 2 |
| Particles >4µm | | A CTM D7C47 | F000 | 0.10 | | |
| Tartiolog > Tarti | | ASTM D7647 | >5000 | 619 | | |
| Particles >6µm | | ASTM D7647 ASTM D7647 | | 619 115 | | |
| | | | | | | |
| Particles >6µm | | ASTM D7647 | >1300 | 115 | | |
| Particles >6μm Particles >14μm | | ASTM D7647 ASTM D7647 ASTM D7647 | >1300 | 115 8 | | |
| Particles >6μm Particles >14μm Particles >21μm | | ASTM D7647 ASTM D7647 ASTM D7647 | >1300 >160 >40 >10 | 115 8 | | |

FLUID DEGRADATION method limit/base current history 1 history 2 Acid Number (AN) mg KOH/g ASTM D8045 0.47



OIL ANALYSIS REPORT

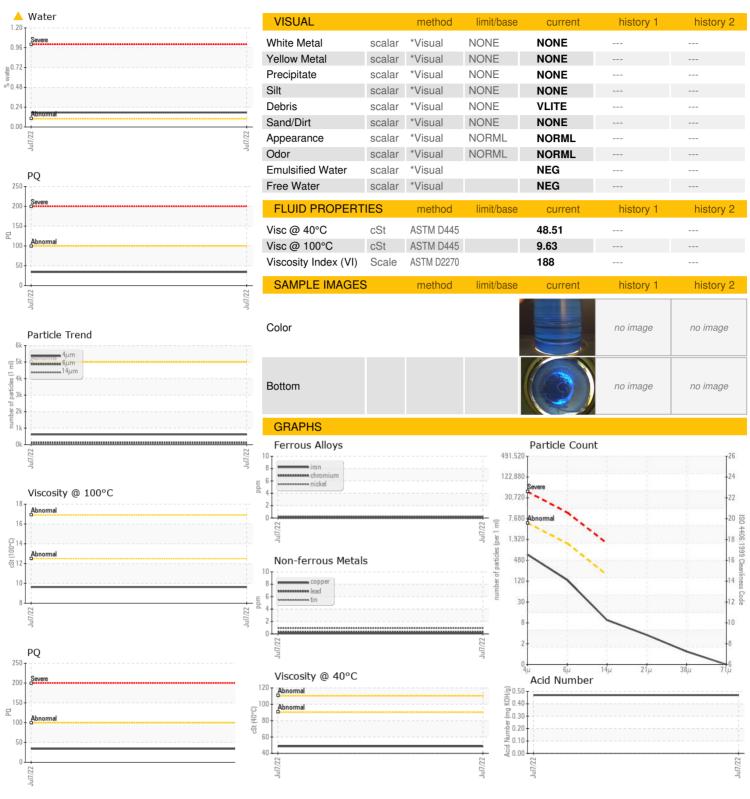



Laboratory Sample No. Lab Number **Unique Number**

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : RP0028758 : 05586977 : 10046424

Received

Diagnosed

: 12 Jul 2022 Diagnostician : Jonathan Hester

: 08 Jul 2022

OUTOKUMPU STAINLESS USA

HWY 43 N CALVERT, AL US 36513

Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PQ, PrtCount, VI) Contact: MARIO JOHNSON Certificate L2367 Mario.johnson@outokumpu.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

T: (251)321-4105

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: