

# **OIL ANALYSIS REPORT**

#### Area AEON 9000 SP [12643788] Machine Id GARDNER DENVER S524134 - DUPONT MPW Component

Compressor

#### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

# Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend




NORMAL

| SAMPLE INFORM    | <b>IATION</b> | method      | limit/base | current     | history1 | history2 |
|------------------|---------------|-------------|------------|-------------|----------|----------|
| Sample Number    |               | Client Info |            | UCH05594766 |          |          |
| Sample Date      |               | Client Info |            | 08 Jul 2022 |          |          |
| Machine Age      | hrs           | Client Info |            | 25626       |          |          |
| Oil Age          | hrs           | Client Info |            | 1354        |          |          |
| Oil Changed      |               | Client Info |            | Not Changd  |          |          |
| Sample Status    |               |             |            | NORMAL      |          |          |
| -                |               |             | 11 11 11   |             |          |          |
| WEAR METALS      |               | method      | limit/base | current     | history1 | history2 |
| Iron             | ppm           | ASTM D5185m | >50        | 0           |          |          |
| Chromium         | ppm           | ASTM D5185m | >10        | 0           |          |          |
| Nickel           | ppm           | ASTM D5185m |            | 0           |          |          |
| Titanium         | ppm           | ASTM D5185m |            | 0           |          |          |
| Silver           | ppm           | ASTM D5185m |            | 0           |          |          |
| Aluminum         | ppm           | ASTM D5185m | >25        | 0           |          |          |
| Lead             | ppm           | ASTM D5185m | >25        | <1          |          |          |
| Copper           | ppm           | ASTM D5185m | >50        | 0           |          |          |
| Tin              | ppm           | ASTM D5185m | >15        | <1          |          |          |
| Vanadium         | ppm           | ASTM D5185m |            | 0           |          |          |
| Cadmium          | ppm           | ASTM D5185m |            | 0           |          |          |
| ADDITIVES        |               | method      | limit/base | current     | history1 | history2 |
| Boron            | ppm           | ASTM D5185m | 0          | 0           |          |          |
| Barium           | ppm           | ASTM D5185m | 0          | 0           |          |          |
| Molybdenum       | ppm           | ASTM D5185m | 0          | 0           |          |          |
| Manganese        | ppm           | ASTM D5185m |            | 0           |          |          |
| Magnesium        | ppm           | ASTM D5185m | 0          | <1          |          |          |
| Calcium          | ppm           | ASTM D5185m | 0          | 2           |          |          |
| Phosphorus       | ppm           | ASTM D5185m | 800        | 734         |          |          |
| Zinc             | ppm           | ASTM D5185m | 0          | 0           |          |          |
| Sulfur           | ppm           | ASTM D5185m | 0          | 0           |          |          |
| CONTAMINANTS     |               | method      | limit/base | current     | history1 | history2 |
| Silicon          | ppm           | ASTM D5185m | >25        | 0           |          |          |
| Sodium           | ppm           | ASTM D5185m |            | 0           |          |          |
| Potassium        | ppm           | ASTM D5185m | >20        | 1           |          |          |
| FLUID DEGRADA    | TION          | method      | limit/base | current     | history1 | history2 |
| Acid Number (AN) | mg KOH/g      | ASTM D8045  | .170       | 0.32        |          |          |
| VISUAL           |               | method      | limit/base | current     | history1 | history2 |
| White Metal      | scalar        | *Visual     | NONE       | NONE        |          |          |
| Yellow Metal     | scalar        | *Visual     | NONE       | NONE        |          |          |
| Precipitate      | scalar        | *Visual     | NONE       | NONE        |          |          |
| Silt             | scalar        | *Visual     | NONE       | NONE        |          |          |
| Debris           | scalar        | *Visual     | NONE       | NONE        |          |          |
| Sand/Dirt        | scalar        | *Visual     | NONE       | NONE        |          |          |
| Appearance       | scalar        | *Visual     | NORML      | NORML       |          |          |
| Odor             | scalar        | *Visual     | NORML      | NORML       |          |          |
| Emulsified Water | scalar        | *Visual     | >0.1       | NEG         |          |          |
| Free Water       | scalar        | *Visual     |            | NEG         |          |          |
|                  |               |             |            | _           |          |          |



# **OIL ANALYSIS REPORT**

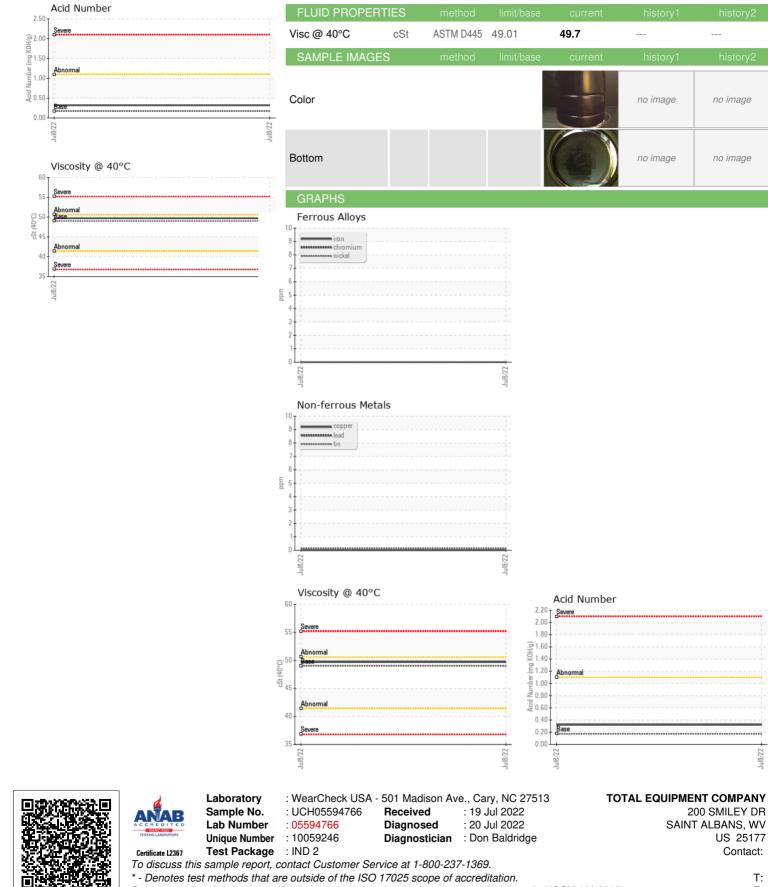

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - UCTOTSAI Page 2 of 2

Contact:

Т:

F: