


Machine Id  
**LIEBHERR 184-713**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

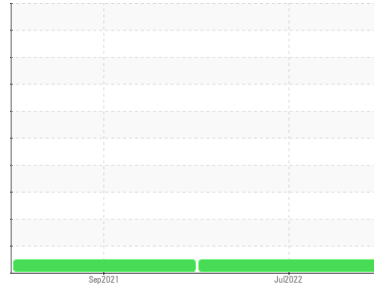

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>LH0217302</b>	LH0200480	---
Sample Date	Client Info			<b>11 Jul 2022</b>	30 Sep 2021	---
Machine Age	hrs	Client Info		<b>8804</b>	8339	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>20</b>	17	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	1	---
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>125	<b>1</b>	4	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Antimony	ppm	ASTM D5185m		<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>&lt;1</b>	19	---
Barium	ppm	ASTM D5185m	10	<b>4</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>67</b>	60	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	450	<b>804</b>	952	---
Calcium	ppm	ASTM D5185m	3000	<b>1260</b>	1213	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1043</b>	1121	---
Zinc	ppm	ASTM D5185m	1350	<b>1278</b>	1168	---
Sulfur	ppm	ASTM D5185m	4250	<b>3825</b>	2990	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	<b>2</b>	2	---
Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	19	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	14.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>11.3</b>	---	---









# OIL ANALYSIS REPORT

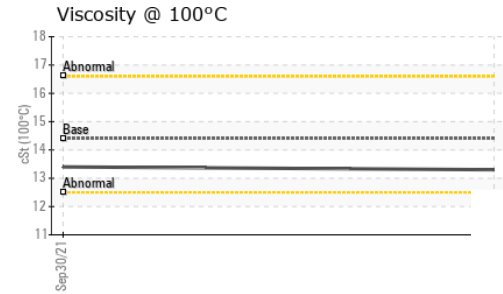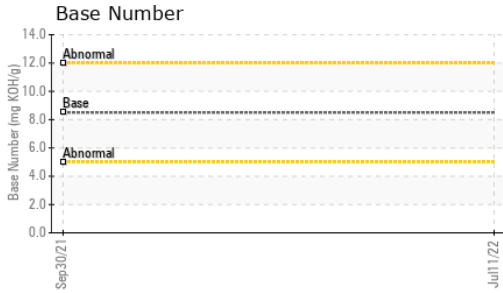

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.3</b>	13.4	---

### GRAPHS

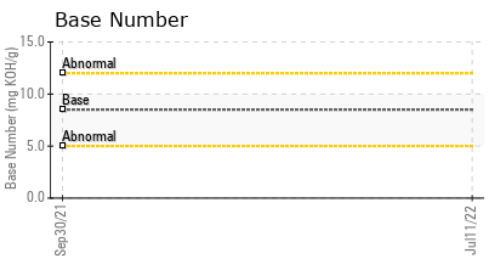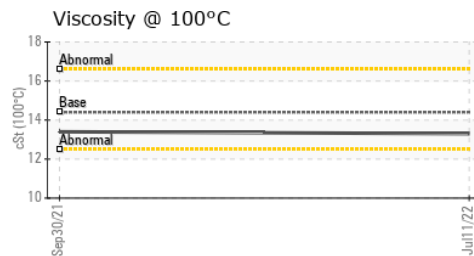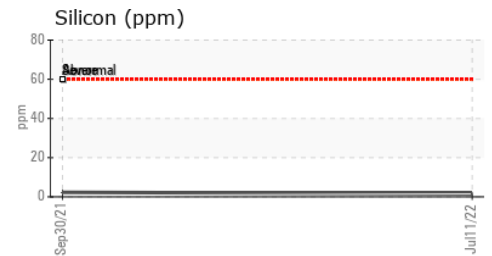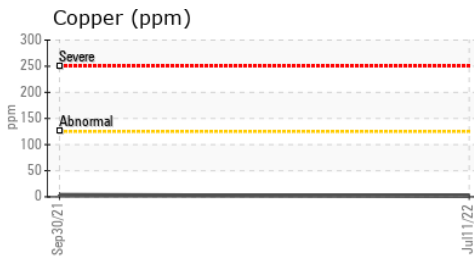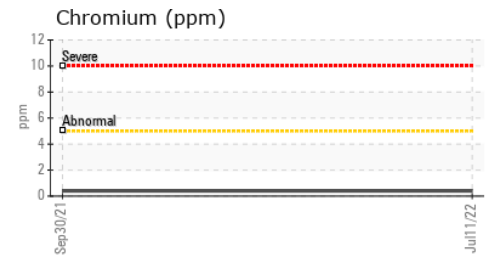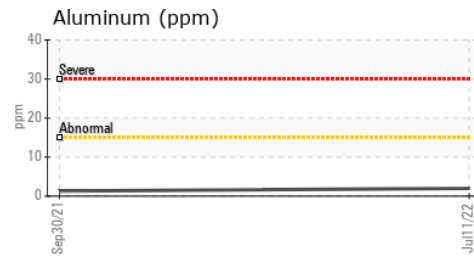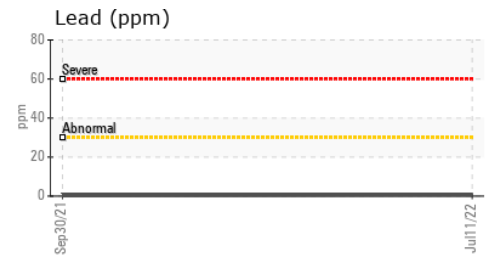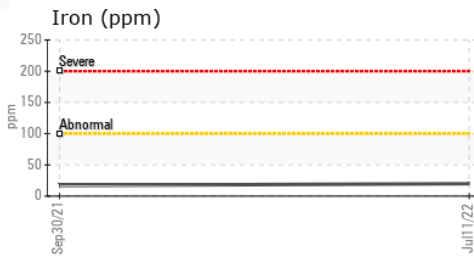

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LH0217302      **Received** : 19 Jul 2022  
**Lab Number** : 05595237      **Diagnosed** : 20 Jul 2022  
**Unique Number** : 10059717      **Diagnostician** : Wes Davis  
**Test Package** : MOBCE ( Additional Tests: TBN )

**FINKBINER EQUIPMENT CO.**  
 15 W 400 N FRONTAGE RD  
 BURR RIDGE, IL  
 US 60527  
 Contact: DON FITZGERALD  
 dfitzgerald@finkbiner.com  
 T: (815)546-8991  
 F: (630)654-3792

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)