


PROBLEM SUMMARY

Machine Id FRICK FRICK B Component Screw Compressor Fluid

NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

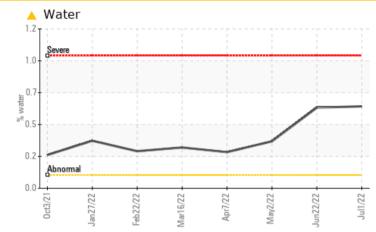

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL		
Water	%	ASTM D6304	>0.1	6 0.617	▲ 0.607	0 .354		
ppm Water	ppm	ASTM D6304	>1000	6172.1	A 6071.5	▲ 3545.2		


Customer Id: GARROW Sample No.: TO60000181 Lab Number: 05595393 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

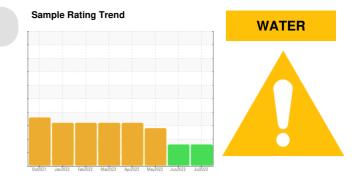

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter	MISSED	Aug 23 2022	?	We recommend you service the filters on this component.		

HISTORICAL DIAGNOSIS

22 Jun 2022 Diag: Angela Borella



We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

02 May 2022 Diag: Doug Bogart



We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

07 Apr 2022 Diag: Jonathan Hester

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

Sample Rating Trend



FRICK FRICK B Component Screw Compressor Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Machine Id

A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Sample Number Client Info TO60000181 TO70000050 TO7000005 Sample Date Client Info 01 Jul 2022 22 Jun 2022 02 May 20 Machine Age hrs Client Info 0 0 0 Oil Age hrs Client Info 0 0 0 0 Oil Changed Client Info N/A N/A N/A N/A Sample Status Imethod Imit/base current history1 history1 VEAR METALS method Imit/base current history1 history1 Iron ppm ASTM D5185m >60 <1 <1 <1 Chromium ppm ASTM D5185m >60 <1 <1 <1 <1 Nickel ppm ASTM D5185m >4 0 0 0 0 Silver ppm ASTM D5185m >5 <1 <1 <1 <1 0 0 0 0 0 0 0	022 1AL
Machine Age hrs Client Info 0 0 0 Oil Age hrs Client Info N/A N/A N/A Sample Status Image Client Info N/A N/A N/A Sample Status Image Client Info N/A N/A N/A WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >60 <1 <1 <1 Chromium ppm ASTM D5185m >4 0 0 0 Nickel ppm ASTM D5185m >4 0 0 0 Silver ppm ASTM D5185m <1 <1 <1 0 Lead ppm ASTM D5185m >10 <1 <1 0 0 Cadmium ppm ASTM D5185m >15 2 2 <1 0 ADDTIVES method limit/base current history1 history	1AL
Oil AgehrsClient Info000Oil ChangedClient InfoN/AN/AN/AN/ASample StatusImit/baseCurrentABNORMALABNORMALABNORMALWEAR METALSmethodlimit/basecurrenthistory1history1IronppmASTM D5185m>60<1<1<1ChromiumppmASTM D5185m>60<1<1<1NickelppmASTM D5185m<1<100NickelppmASTM D5185m<1<1<1<1AluminumppmASTM D5185m<5<1<1<1AluminumppmASTM D5185m>5<1<1<1CopperppmASTM D5185m>10<1<1<1TinppmASTM D5185m>1522<1VanadiumppmASTM D5185m>1522<1OcadmiumppmASTM D5185m<1000ADDITIVESmethodlimit/basecurrenthistory1history1BoronppmASTM D5185m750ManganeseppmASTM D5185m000ManganeseppmASTM D5185m<1<10ManganeseppmASTM D5185m<1<10PhosphorusppmASTM D5185m<1<10ManganesiumppmASTM D5185m<1 <td></td>	
Oil Changed Client Info N/A N/A N/A N/A Sample Status method limit/base current history1 history1 WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >60 <1	
Sample Statusmethodlimit/basecurrenthistory1ABNORMALWEAR METALSmethodlimit/basecurrenthistory1history1IronppmASTM D5185m>60<1<1<1ChromiumppmASTM D5185m>4000NickelppmASTM D5185m<1<100NickelppmASTM D5185m<1<100SilverppmASTM D5185m<5<1<1<1AluminumppmASTM D5185m>5<1<10LeadppmASTM D5185m>10<1<1<1CopperppmASTM D5185m>1522<1VanadiumppmASTM D5185m>1522<1VanadiumppmASTM D5185m>1522<1BoronppmASTM D5185m<1000MolybdenumppmASTM D5185m0000MagneseppmASTM D5185m0000MagnesiumppmASTM D5185m<1<100MagnesiumppmASTM D5185m<1<100MagnesiumppmASTM D5185m<1<100MagnesiumppmASTM D5185m<1<100MagnesiumppmASTM D5185m<1<100Magnesium	
WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >60 <1 <1 <1 Chromium ppm ASTM D5185m >4 0 0 0 Nickel ppm ASTM D5185m <1 <1 0 0 Titanium ppm ASTM D5185m <1 <1 0 0 Silver ppm ASTM D5185m <1 <1 <1 0 Lead ppm ASTM D5185m >5 <1 <1 0 0 Copper ppm ASTM D5185m >10 <1 <1 0 0 Tin ppm ASTM D5185m >15 2 2 <1 0 Vanadium ppm ASTM D5185m >15 2 2 <1 0 Boron ppm ASTM D5185m <0 0 0 0 Molybdenum ppm ASTM D	
Iron ppm ASTM D5185m >60 <1	ry2
Chromium ppm ASTM D5185m >4 0 0 0 Nickel ppm ASTM D5185m <1 <1 0 Titanium ppm ASTM D5185m <0 0 0 Silver ppm ASTM D5185m <1 <1 <1 <1 Aluminum ppm ASTM D5185m >5 <1 <1 <1 0 Lead ppm ASTM D5185m >5 <1 <1 <1 0 Lead ppm ASTM D5185m >10 <1 <1 <1 0 Lead ppm ASTM D5185m >15 2 2 <1 0 Copper ppm ASTM D5185m >15 2 2 <1 0 Vanadium ppm ASTM D5185m >15 2 <1 0 0 Cadmium ppm ASTM D5185m >15 0 0 0 0 0 0 0	
Nickel ppm ASTM D5185m <1	
Titanium ppm ASTM D5185m 0 0 0 Silver ppm ASTM D5185m <1 <1 <1 <1 Aluminum ppm ASTM D5185m >5 <1 <1 0 Lead ppm ASTM D5185m >5 <1 <1 0 Lead ppm ASTM D5185m >10 <1 <1 <1 0 Copper ppm ASTM D5185m >30 <1 <1 0 0 Tin ppm ASTM D5185m >15 2 2 <1 0 Vanadium ppm ASTM D5185m >15 2 2 <1 0 Cadmium ppm ASTM D5185m 0 0 0 0 ADDITIVES method limit/base current history1 history1 Barium ppm ASTM D5185m 0 0 0 0 Molybdenum ppm ASTM D5185m <t< th=""><th></th></t<>	
Silver ppm ASTM D5185m <1	
Aluminum ppm ASTM D5185m >5 <1	
Lead ppm ASTM D5185m >10 <1	
Copper ppm ASTM D5185m >30 <1	
Tin ppm ASTM D5185m >15 2 2 <1	
Tin ppm ASTM D5185m >15 2 2 <1	
Vanadium ppm ASTM D5185m 0 0 0 Cadmium ppm ASTM D5185m <1 0 0 ADDITIVES method limit/base current history1 history1 Boron ppm ASTM D5185m 7 5 0 Barium ppm ASTM D5185m 0 0 0 Molybdenum ppm ASTM D5185m 0 0 0 Maganese ppm ASTM D5185m 0 0 0 Magnesium ppm ASTM D5185m 0 0 0 Calcium ppm ASTM D5185m 1 <1 0 Phosphorus ppm ASTM D5185m 17 12 12 Zinc ppm ASTM D5185m 0 0 0	
CadmiumppmASTM D5185m<1	
Boron ppm ASTM D5185m 7 5 0 Barium ppm ASTM D5185m 0 0 0 0 Molybdenum ppm ASTM D5185m 0 0 0 0 Malganese ppm ASTM D5185m 0 0 0 0 Magnesium ppm ASTM D5185m 0 0 0 0 Calcium ppm ASTM D5185m 0 0 2 Phosphorus ppm ASTM D5185m 17 12 12 Zinc ppm ASTM D5185m 0 0 0 0	
Barium ppm ASTM D5185m 0 0 0 Molybdenum ppm ASTM D5185m 0 0 0 Manganese ppm ASTM D5185m 0 0 0 Magnesium ppm ASTM D5185m <1 <1 0 Calcium ppm ASTM D5185m 0 0 2 Phosphorus ppm ASTM D5185m 17 12 12 Zinc ppm ASTM D5185m 0 0 0	ry2
Molybdenum ppm ASTM D5185m 0 0 0 Manganese ppm ASTM D5185m 0 0 0 0 Magnesium ppm ASTM D5185m c1 <1	
Manganese ppm ASTM D5185m 0 0 0 Magnesium ppm ASTM D5185m <1 <1 0 Calcium ppm ASTM D5185m 0 0 2 Phosphorus ppm ASTM D5185m 17 12 12 Zinc ppm ASTM D5185m 0 0 0	
Magnesium ppm ASTM D5185m <1	
Calcium ppm ASTM D5185m 0 2 Phosphorus ppm ASTM D5185m 17 12 12 Zinc ppm ASTM D5185m 0 0 0	
Phosphorus ppm ASTM D5185m 17 12 12 Zinc ppm ASTM D5185m 0 0 0	
Zinc ppm ASTM D5185m 0 0 0	
Sulfur nom ASTM DE105m 1010 1562 1070	
Sulfur ppm ASTM D5185m 1818 1563 1079	
CONTAMINANTS method limit/base current history1 histor	ry2
Silicon ppm ASTM D5185m >50 20 21	
Sodium ppm ASTM D5185m 0 0 0	
Potassium ppm ASTM D5185m >20 2 1 0	
Water % ASTM D6304 >0.1 △ 0.607 △ 0.354	
ppm Water ppm ASTM D6304 >1000	-
FLUID CLEANLINESS method limit/base current history1 histor	ry2
Particles >4μm ASTM D7647 >10000 7684 5855 ▲ 20042	
Particles >6μm ASTM D7647 >2500 1246 495 Δ 3352	
Particles >14μm ASTM D7647 >320 68 24 188	
Particles >21μm ASTM D7647 >80 18 6 38	
Particles >38μm ASTM D7647 >20 0 0 0	
Particles >71μm ASTM D7647 >4 0 0 0	
Oil Cleanliness ISO 4406 (c) >20/18/15 20/17/13 20/16/12 🔺 22/19/1	
FLUID DEGRADATION method limit/base current history1 histor	15
Acid Number (AN) mg KOH/g ASTM D8045 0.604 0.431 0.173	


Contact/Location: DUSTIN FRY - GARROW



OIL ANALYSIS REPORT







Aar16/25

Ê 80

cles 60

÷ 40


20


0

Abnorma

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT		mathad	limit/booo	ourropt	biotomit	biotom/0
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		112	111	110
Visc @ 100°C	cSt	ASTM D445		19.4	19.3	19.2
Viscosity Index (VI)	Scale	ASTM D2270		195	196	196
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

Bottom



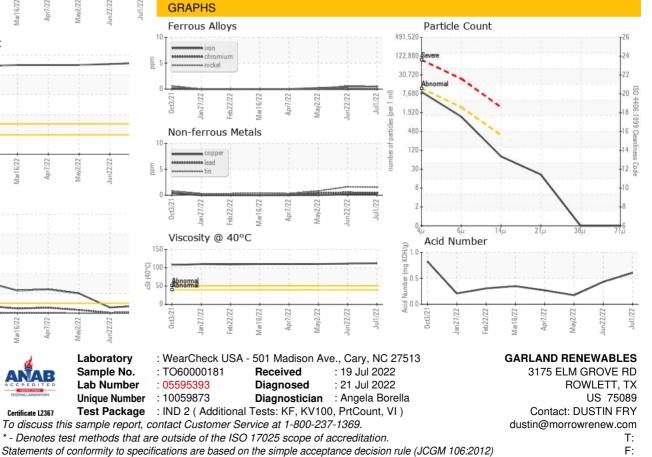

Contact/Location: DUSTIN FRY - GARROW