

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area Separation 2307 Evap Agitator Gearbox

Component **Agitator Gearbox** Mobilgear 629 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Aug202	1 Nov2021	Mar2022	Jul2022	
SAMPLE INFORM	MATION	method				history2
Sample Number		Client Info		WC0687528	WC0670727	WC0614183
Sample Date		Client Info		18 Jul 2022	11 Mar 2022	30 Nov 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	3	3	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	0
Lead	ppm	ASTM D5185m	>100	0	<1	0
Copper	ppm	ASTM D5185m		0	0	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ррпт					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		21	21	21
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		2	0	0
Phosphorus	ppm	ASTM D5185m		327	342	351
Zinc	ppm	ASTM D5185m		7	0	0
Sulfur	ppm	ASTM D5185m		16657	13274	14666
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	<1	0
Sodium	ppm	ASTM D5185m		<1	2	<1
Potassium	ppm	ASTM D5185m	>20	4	6	6
Water	%	ASTM D6304	>0.1	0.013	0.010	0.013
ppm Water	ppm	ASTM D6304	>1000	130.7	104.4	132.9
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	7960	8316	6179
Particles >6µm		ASTM D7647	>5000	1148	1107	613
Particles >14µm		ASTM D7647	>640	56	72	36
Particles >21µm		ASTM D7647	>160	10	17	9
Particles >38µm		ASTM D7647	>40	1	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/17/13	20/17/13	20/16/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.79	0.81	0.813
53:09) Rev: 1	0 - 9				bmitted By: BRE	


Report Id: AJIRAL [WUSCAR] 05597507 (Generated: 01/26/2024 10:53:09) Rev: 1



OIL ANALYSIS REPORT

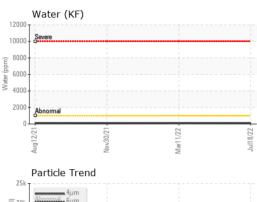

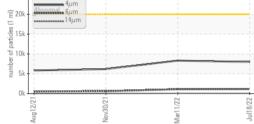

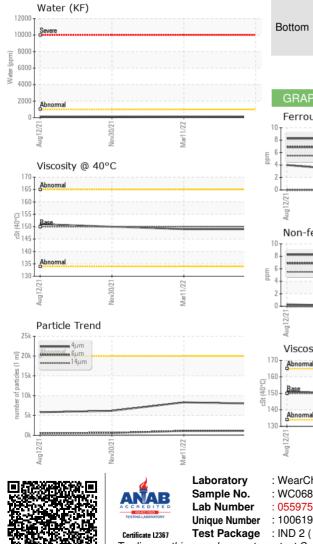

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	149	149	150
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

