


PROBLEM SUMMARY

Area ISO 32 [12624383] INGERSOLL RAND 2 - BLACKHAWK MINING (S/N NOT GIVEN) Component

Compressor

COMPONENT CONDITION SUMMARY

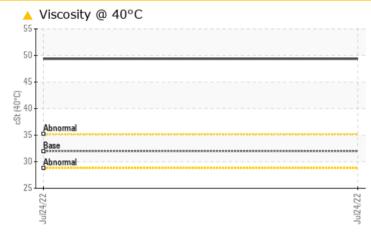

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status				ATTENTION				
Visc @ 40°C	cSt	ASTM D445	32	49.38				


Customer Id: UCTOTSAI Sample No.: UCH05599592 Lab Number: 05599592 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

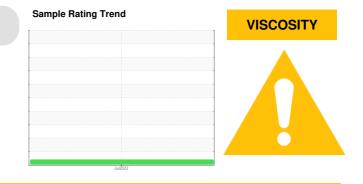

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Change Fluid			?	Oil and filter change at the time of sampling has been noted.	
Change Filter			?	Oil and filter change at the time of sampling has been noted.	

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Area ISO 32 [12624383] INGERSOLL RAND 2 - BLACKHAWK MINING (S/N NOT GIVEN) Component

Compressor

DIAGNOSIS

A Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

				Jul2022		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH05599592		
Sample Date		Client Info		24 Jul 2022		
Machine Age	hrs	Client Info		26637		
Dil Age	hrs	Client Info		0		
Dil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	5		
Chromium	ppm	ASTM D5185m	>10	0		
lickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	6		
ead	ppm	ASTM D5185m	>25	<1		
Copper	ppm	ASTM D5185m		<1		
Fin	ppm	ASTM D5185m	>15	<1		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
	ppm		It as to the second	-	Internet and	history O
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	2		
Barium	ppm	ASTM D5185m	5	705		
Volybdenum	ppm	ASTM D5185m	5	0		
Vanganese	ppm	ASTM D5185m		0		
Vagnesium	ppm	ASTM D5185m	5	0		
Calcium	ppm	ASTM D5185m	5	2		
Phosphorus	ppm	ASTM D5185m	150	55		
Zinc	ppm	ASTM D5185m	5	3		
Sulfur	ppm	ASTM D5185m	5000	440		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m		57		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.51	0.19		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		

Sample Rating Trend

VISCOSITY





OIL ANALYSIS REPORT

method

limit/base

current

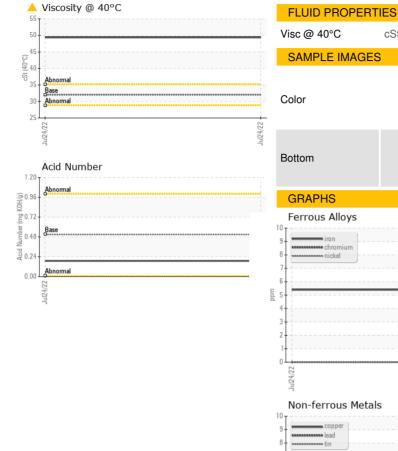

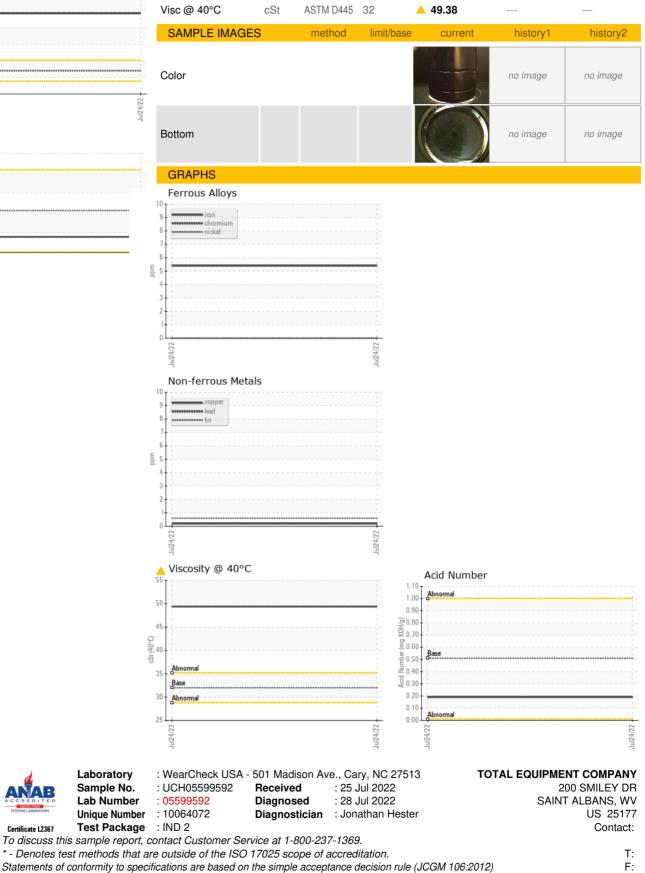

Certificate L2367

Contact/Location: ? ? - UCTOTSAI Page 4 of 4

history2

history1