

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER AIRCENTER SM15 3706954 (S/N 1204)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Mar201	9 Jun2020	Sep2021	Jun2022	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP40605	KCP32669	KCP22851
Sample Date		Client Info		09 Jun 2022	26 Sep 2021	10 Jun 2020
Machine Age	hrs	Client Info		25114	15429	12031
Oil Age	hrs	Client Info		9685	3398	2030
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	13	6	9
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m	-		2	3
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	ppm		limit/base	-		
		method	iimivbase	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	4	5
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	30	32	41
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		2	1	2
Zinc	ppm	ASTM D5185m		4	0	0
Sulfur	ppm	ASTM D5185m		20301	16174	16033
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		10	9	12
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304	>0.05	0.030	0.015	0.024
ppm Water	ppm	ASTM D6304	>500	301.7	152.1	241.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5583	34273	6930
Particles >6µm		ASTM D7647	>1300	618	798	1 427
Particles >14µm		ASTM D7647	>80	32	68	52
Particles >21µm		ASTM D7647	>20	8	19	14
Particles >38µm		ASTM D7647	>4	0	2	4
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>17/13	16/12	17/13	▲ 18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.311	0.362
11.04) Devid				0		


Report Id: DAIBUF [WUSCAR] 05602317 (Generated: 07/31/2023 08:11:24) Rev: 1


Contact/Location: RONALD CLARKE - DAIBUF



OIL ANALYSIS REPORT





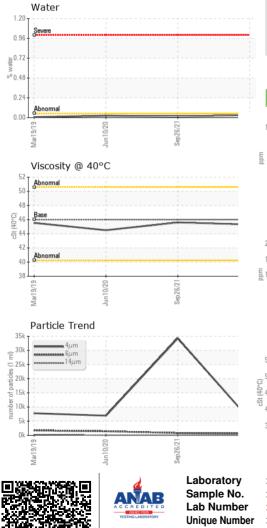


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.3	45.6	44.5
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						
Bottom						



* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

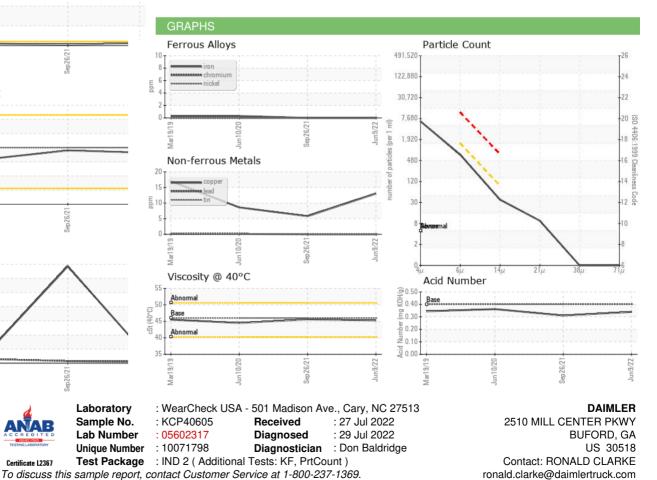

Report Id: DAIBUF [WUSCAR] 05602317 (Generated: 07/31/2023 08:11:24) Rev: 1

Certificate L2367

Contact/Location: RONALD CLARKE - DAIBUF

T:

F: