

# **PROBLEM SUMMARY**

# BLEACH 02

METSO BX060 POST 02 PRESS NW (S/N 0661-03-02-040-040-040)


Component **Bearing** 


**NOT GIVEN (4 GAL)** 





#### **COMPONENT CONDITION SUMMARY**

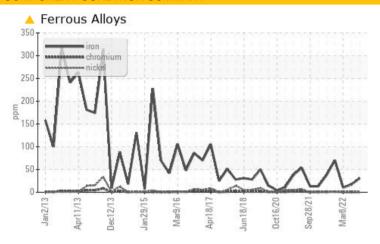

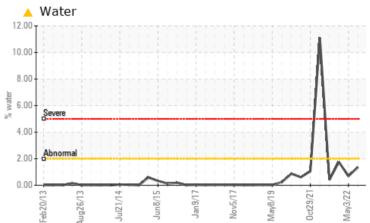

#### RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample at the next service interval to monitor.

PROBLEMATIC 7	TEST RE	SULTS				
Sample Status				ABNORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>20	<u>▲</u> 31	17	10
Water	%	ASTM D6304	>2	<b>1.36</b>	0.683	1.75
ppm Water	ppm	ASTM D6304		<b>13600</b>	6830	17500
Debris	scalar	*Visual	NONE	MODER	LIGHT	VLITE
Appearance	scalar	*Visual	NORML	▲ HAZY	HAZY	HAZY
<b>Emulsified Water</b>	scalar	*Visual	>2	<b>0.2%</b>	0.2%	0.2%

Customer Id: INTRIERP Sample No.: WC0676807 Lab Number: 05617798 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS** Date Action **Status** Done By Description We advise that you perform a filter service, and use off-line filtration to ? Change Filter MISSED Aug 31 2022 improve the cleanliness of the system fluid. We advise that you perform a filter service, and use off-line filtration to Filter Fluid **MISSED** Aug 31 2022 ? improve the cleanliness of the system fluid.

#### HISTORICAL DIAGNOSIS

#### 03 May 2022 Diag: Don Baldridge

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 08 Mar 2022 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

# view report

#### 21 Feb 2022 Diag: Jonathan Hester

#### WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. All other component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






# **OIL ANALYSIS REPORT**

# BLEACH O2

# METSO BX060 POST 02 PRESS NW (S/N 0661-03-02-040-040-040)

Bearing

**NOT GIVEN (4 GAL)** 





## **DIAGNOSIS**

#### Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample at the next service interval to monitor.

### Wear

An increase in the iron level is noted. All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0676807	WC0676818	WC0676810
Sample Date		Client Info		29 Jul 2022	03 May 2022	08 Mar 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>△</b> 31	17	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	2	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		1	0	0
Aluminum	ppm	ASTM D5185m	>20	1	<1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	1	<1	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 2	history1 <1	history2 <1
	ppm ppm		limit/base			
Boron		ASTM D5185m	limit/base	2	<1	<1
Boron Barium	ppm	ASTM D5185m ASTM D5185m	limit/base	2 0	<1	<1
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	2 0 0 <1 0	<1 0 0 0 <1 0	<1 0 0
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	2 0 0 <1	<1 0 0 0 <1	<1 0 0 0
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	2 0 0 <1 0	<1 0 0 0 <1 0	<1 0 0 0
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	2 0 0 <1 0 5	<1 0 0 0 <1 0	<1 0 0 0 0 0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	2 0 0 <1 0 5 42	<1 0 0 0 <1 0 8 34	<1 0 0 0 0 0 6 51
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	2 0 0 <1 0 5 42	<1 0 0 <1 0 8 34	<1 0 0 0 0 0 6 51
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m		2 0 0 <1 0 5 42 0 13531 current	<1 0 0 <1 0 8 34 0 9445 history1	<1 0 0 0 0 0 6 51 0 11881
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base	2 0 0 <1 0 5 42 0 13531	<1 0 0 <1 0 8 34 0 9445	<1 0 0 0 0 0 6 51 0 11881 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base	2 0 0 <1 0 5 42 0 13531 current	<1 0 0 <1 0 8 34 0 9445 history1	<1 0 0 0 0 0 6 51 0 11881 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15 >20	2 0 0 <1 0 5 42 0 13531 current 5	<1 0 0 <1 0 8 34 0 9445 history1 4	<1 0 0 0 0 0 6 51 0 11881 history2 4 2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15 >20	2 0 0 -<1 0 5 42 0 13531 current 5 8 -<1	<1 0 0 <1 0 8 34 0 9445 history1 4 3 1	<1 0 0 0 0 0 6 51 0 11881 history2 4 2 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	limit/base >15 >20	2 0 0 <1 0 5 42 0 13531 current 5 8 <1	<1 0 0 <1 0 8 34 0 9445 history1 4 3 1 0.683	<1 0 0 0 0 0 6 51 0 11881 history2 4 2 <1 1.75



## **OIL ANALYSIS REPORT**

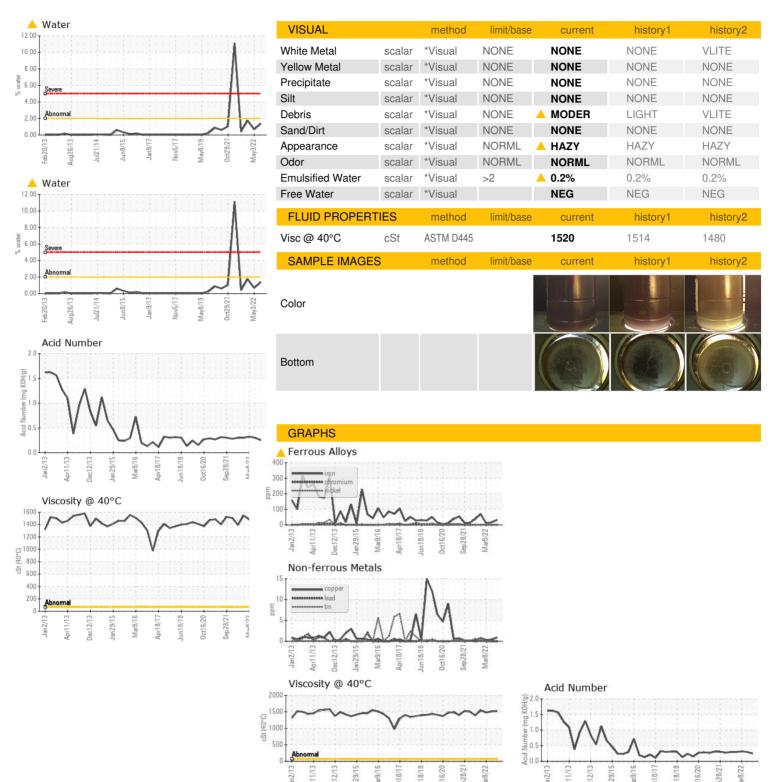





Certificate L2367

Laboratory Sample No.

Lab Number **Unique Number** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: WC0676807 : 05617798

: 10097305

Received : 15 Aug 2022 Diagnosed : 16 Aug 2022 : Doug Bogart Diagnostician

Test Package : IND 2 (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **INTERNATIONAL PAPER** 

865 JOHN L REGEL RD RIEGELWOOD, NC US 28456

Contact: Zach Lizana zachary.lizana@ipaper.com T: (910)362-4775

Report Id: INTRIERP [WUSCAR] 05617798 (Generated: 08/28/2023 14:27:51) Rev: 1