




OIL ANALYSIS REPORT



Area
KANSAS/44/HY - SKID STEER
 Machine Id
53.157L [KANSAS^44^HY - SKID STEER]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (2 GAL)

Sample Rating Trend

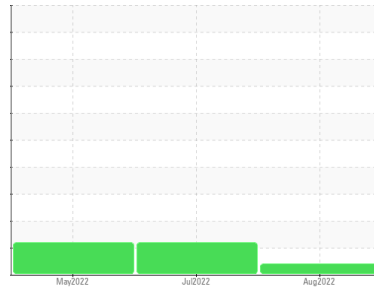

VISCOSITY



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0718119	WC0703463	WC0672461
Sample Date	Client Info		16 Aug 2022	18 Jul 2022	05 May 2022
Machine Age	hrs	Client Info	605	489	327
Oil Age	hrs	Client Info	116	0	327
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			ATTENTION	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	5	14	15
Chromium	ppm	ASTM D5185m >20	<1	<1	1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	<1	3	3
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	2	24	14
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	114	55	47
Barium	ppm	ASTM D5185m 0	0	1	0
Molybdenum	ppm	ASTM D5185m 0	10	40	40
Manganese	ppm	ASTM D5185m	<1	2	3
Magnesium	ppm	ASTM D5185m 0	651	471	532
Calcium	ppm	ASTM D5185m	1441	1751	1911
Phosphorus	ppm	ASTM D5185m	665	760	911
Zinc	ppm	ASTM D5185m	799	969	1077
Sulfur	ppm	ASTM D5185m	2881	3215	2938

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	10	14
Sodium	ppm	ASTM D5185m	1	3	4
Potassium	ppm	ASTM D5185m >20	<1	<1	2
Fuel	%	ASTM D3524 >5	<1.0	▲ 4.3	▲ 4.8

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.3	9.3	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.5	24.6	24.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.5	23.1	21.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	9.3	10.4	10.5







OIL ANALYSIS REPORT

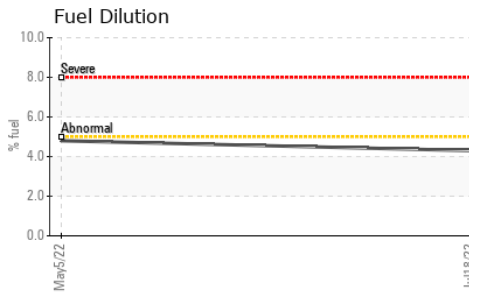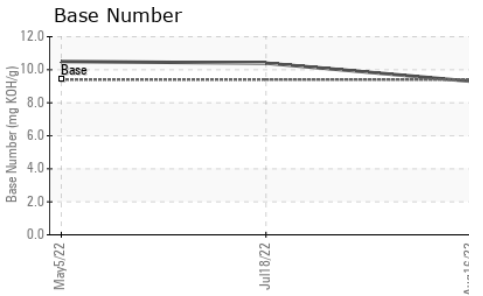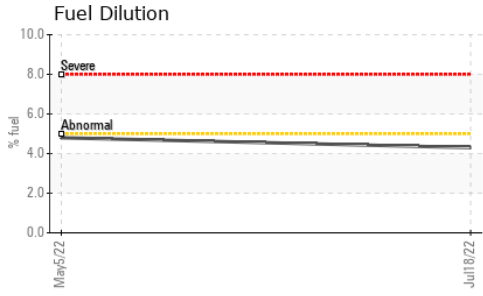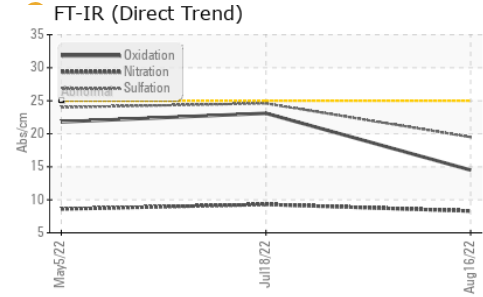

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	● 11.5	● 11.0	▲ 10.3

GRAPHS

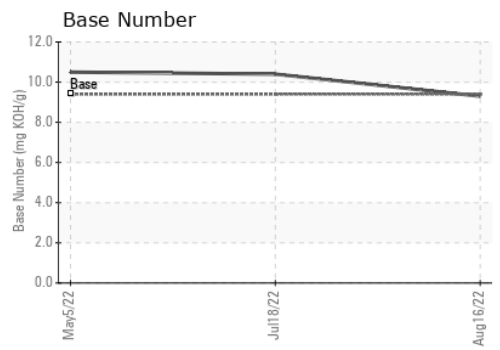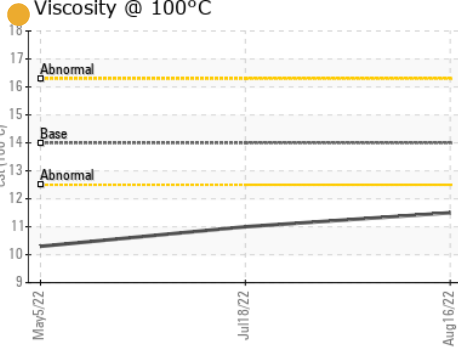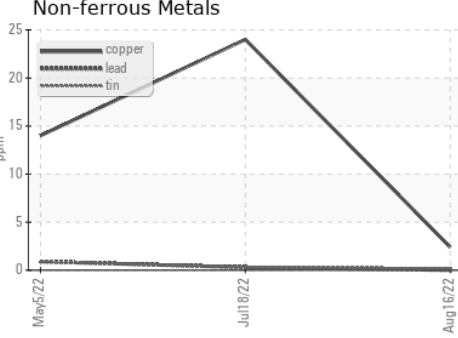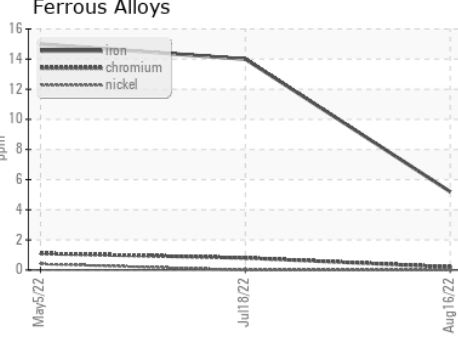

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0718119 **Received** : 22 Aug 2022
Lab Number : 05622725 **Tested** : 23 Aug 2022
Unique Number : 10102232 **Diagnosed** : 23 Aug 2022 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: BILL ORCUTT
 william.orcutt@wildcat.net
 T: (719)499-6303
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)