


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

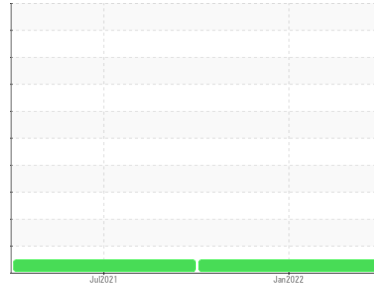

Machine Id  
**KAESER 2973006 (S/N 3296)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- LTR)**

**DIAGNOSIS**

**Recommendation**

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

The amount and size of particulates present in the system are acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCP40875</b>	KCP42882	---
Sample Date	Client Info			<b>31 Jan 2022</b>	29 Jul 2021	---
Machine Age	hrs	Client Info		<b>9693</b>	9506	---
Oil Age	hrs	Client Info		<b>187</b>	500	---
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>10	<b>1</b>	2	---
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	0	---
Antimony	ppm	ASTM D5185m		<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Barium	ppm	ASTM D5185m	90	<b>25</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	90	<b>69</b>	60	---
Calcium	ppm	ASTM D5185m	2	<b>2</b>	0	---
Phosphorus	ppm	ASTM D5185m		<b>&lt;1</b>	4	---
Zinc	ppm	ASTM D5185m		<b>5</b>	0	---
Sulfur	ppm	ASTM D5185m		<b>17623</b>	16534	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Sodium	ppm	ASTM D5185m		<b>7</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	---
Water	%	ASTM D6304	>0.05	<b>0.029</b>	0.034	---
ppm Water	ppm	ASTM D6304	>500	<b>296.8</b>	341.6	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>630</b>	2692	---
Particles >6µm		ASTM D7647	>1300	<b>128</b>	343	---
Particles >14µm		ASTM D7647	>80	<b>14</b>	16	---
Particles >21µm		ASTM D7647	>20	<b>5</b>	4	---
Particles >38µm		ASTM D7647	>4	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>16/14/11</b>	16/11	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.37</b>	0.332	---


# OIL ANALYSIS REPORT

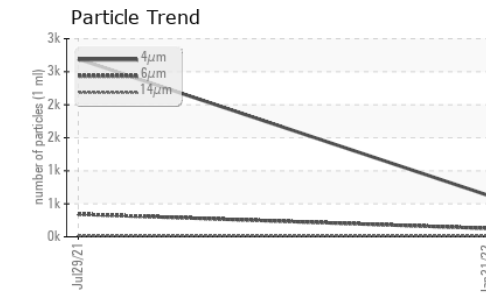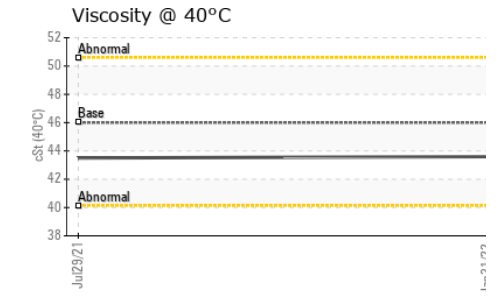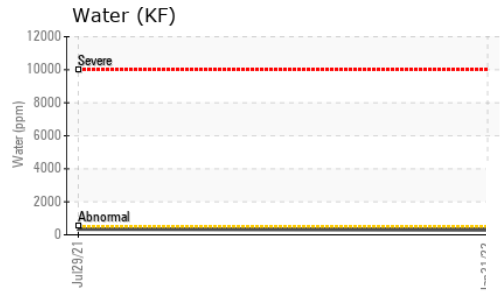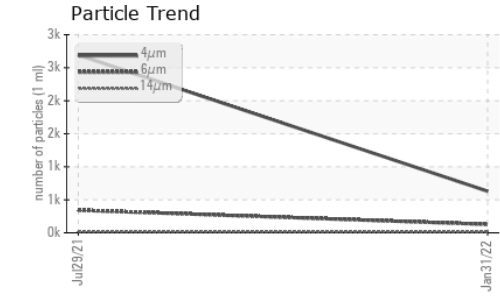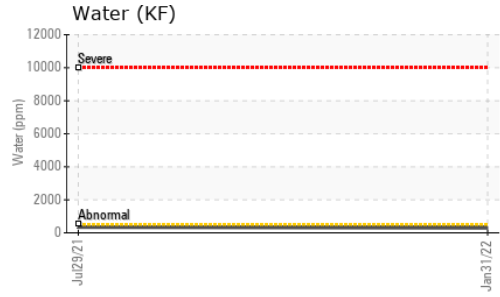






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.6	43.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

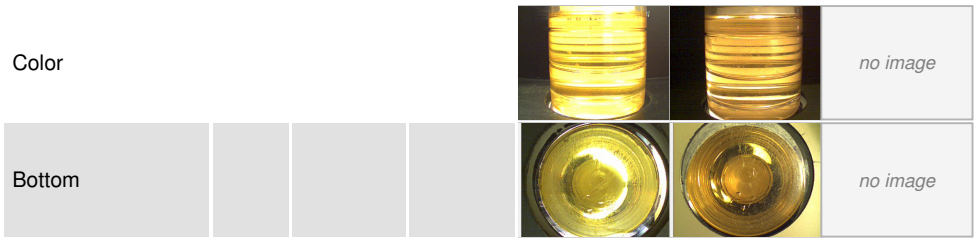

## GRAPHS

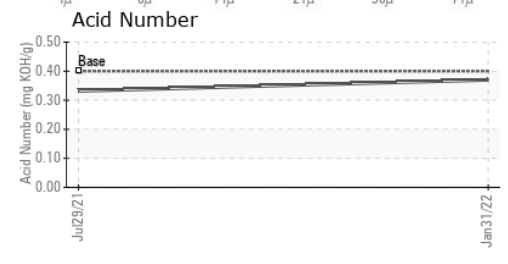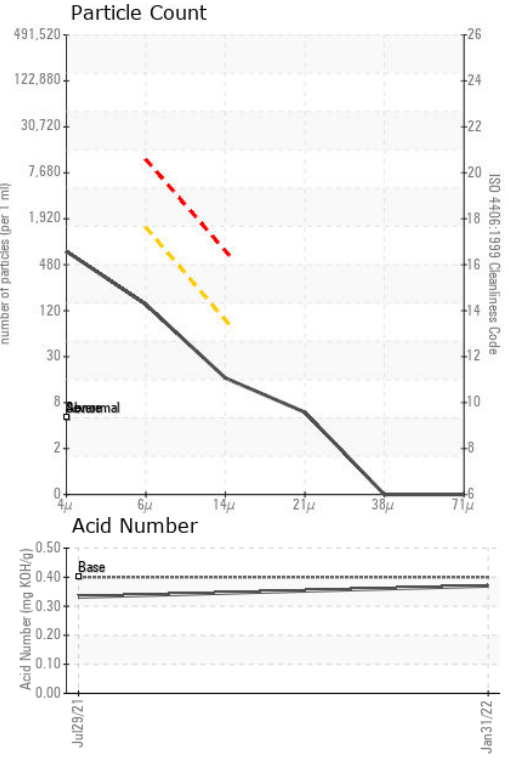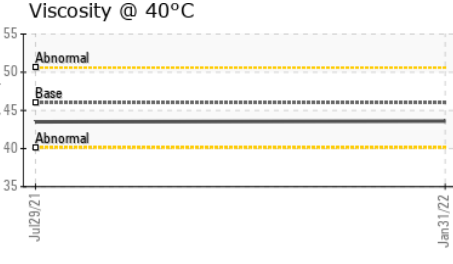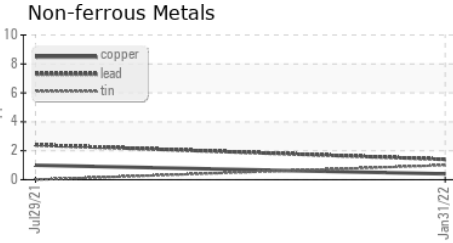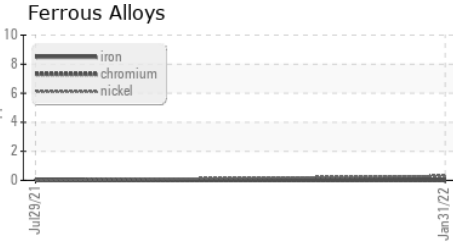

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCP40875 **Received** : 26 Aug 2022  
**Lab Number** : 05628367 **Tested** : 29 Aug 2022  
**Unique Number** : 10112888 **Diagnosed** : 30 Aug 2022 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**LOCKHEED MARTIN**  
 6801 ROSELL ST  
 FORT BENNING, GA  
 US 31905  
 Contact: FRANK SOLARES  
 frank.solares@onevaliant.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)