


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id KAESER ASD 30 2515742 (S/N 1045)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Feb202	1 Dec2021	Jun 2022 Au	ug2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC95201	KC95212	KC95116
Sample Date		Client Info		23 Aug 2022	27 Jun 2022	01 Dec 2021
Machine Age	hrs	Client Info		70503	70008	68764
Oil Age	hrs	Client Info		2000	1576	332
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	5	4	2
Tin	ppm	ASTM D5185m	>10	1	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	0	<1
Barium	ppm	ASTM D5185m	90	0	0	1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	15	20	59
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		1	3	4
Zinc	ppm	ASTM D5185m		28	21	6
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	3	<1
Sodium	ppm	ASTM D5185m	720	2	6	18
Potassium	ppm		>20	0	0	2
Water	%	ASTM D6304	>0.05	0.008	0.015	0.015
ppm Water	ppm	ASTM D6304	>500	84.4	153.2	158.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		378	2488	2045
Particles >6µm		ASTM D7647	>1300	95	511	455
Particles >14µm		ASTM D7647	>80	14	28	19
Particles >21µm		ASTM D7647	>20	5	7	3
Particles >38µm		ASTM D7647	>4	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	16/14/11	18/16/12	16/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.33	0.31	0.356



OIL ANALYSIS REPORT

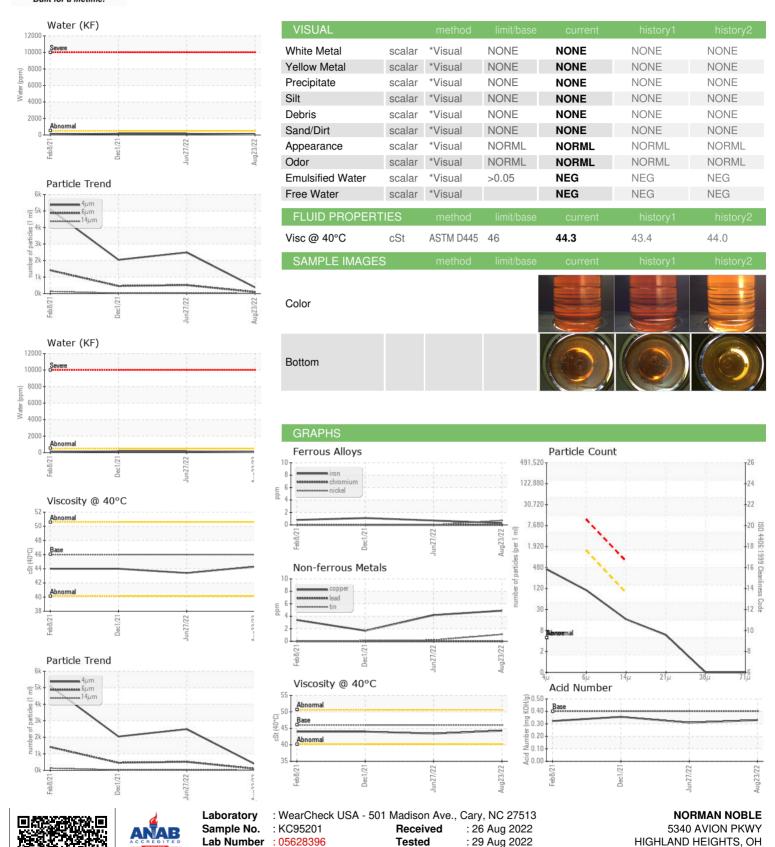

Certificate L2367

Unique Number: 10112917

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2

: 30 Aug 2022 - Angela Borella

Diagnosed

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 44143

T:

F:

Contact: Service Manager