




# OIL ANALYSIS REPORT

Sample Rating Trend

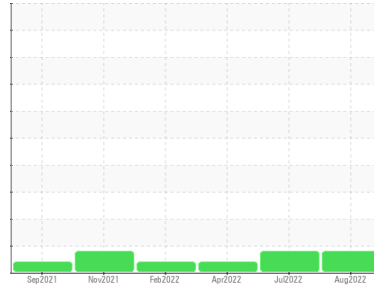

ISO



Area  
**Separation**  
 Machine Id  
**2325-B Evap (S/N lightning)**  
 Component  
**Agitator Gearbox**  
 Fluid  
**Mobilgear 629 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0724707</b>	WC0687525	WC0681500
Sample Date	Client Info		<b>26 Aug 2022</b>	18 Jul 2022	28 Apr 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>4</b>	3	4
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>2</b>	1	2
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	1
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >50	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>13</b>	26	19
Barium	ppm	ASTM D5185m	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>0</b>	<1	2
Calcium	ppm	ASTM D5185m	<b>8</b>	4	5
Phosphorus	ppm	ASTM D5185m	<b>344</b>	331	324
Zinc	ppm	ASTM D5185m	<b>4</b>	<1	11
Sulfur	ppm	ASTM D5185m	<b>12374</b>	13960	10847

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>1</b>	1	1
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	1
Water	%	ASTM D6304 >0.1	<b>0.014</b>	0.008	0.005
ppm Water	ppm	ASTM D6304 >1000	<b>147.5</b>	89.6	55.2

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>▲ 48208</b>	▲ 57072	▲ 48626
Particles >6µm	ASTM D7647	>5000	<b>1744</b>	2892	3013
Particles >14µm	ASTM D7647	>640	<b>40</b>	34	163
Particles >21µm	ASTM D7647	>160	<b>11</b>	5	41
Particles >38µm	ASTM D7647	>40	<b>1</b>	0	1
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>▲ 23/18/12</b>	▲ 23/19/12	▲ 23/19/15

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.76</b>	0.74	0.77




# OIL ANALYSIS REPORT

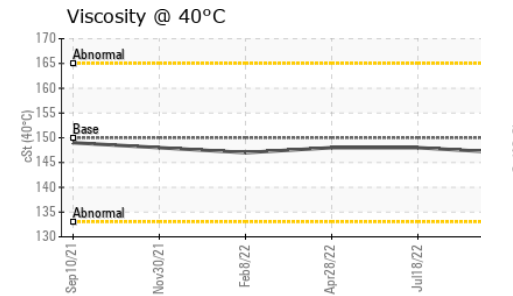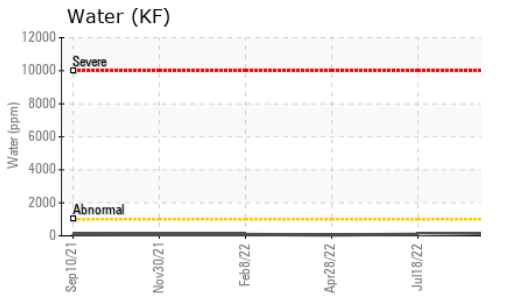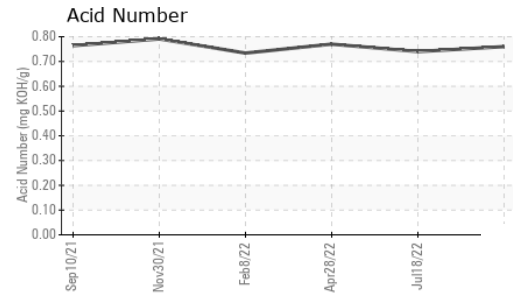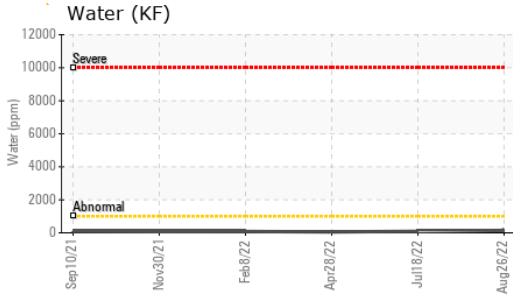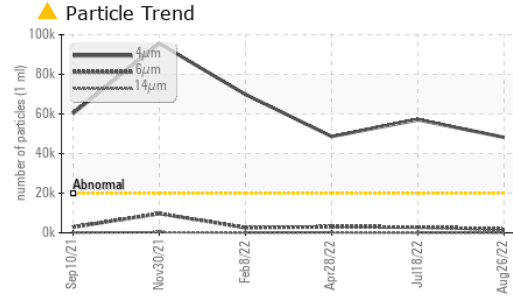






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	147	148

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

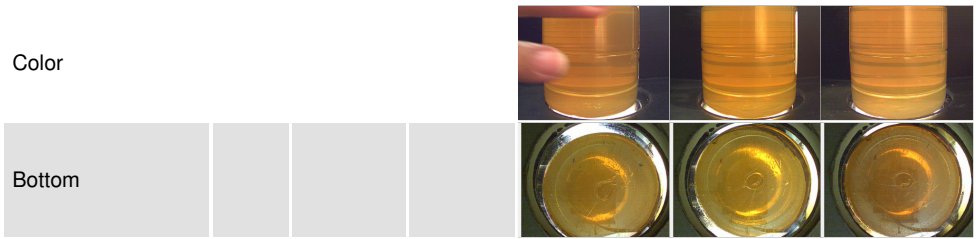

## GRAPHS

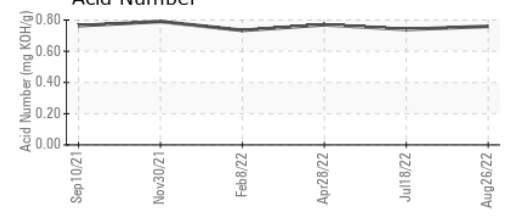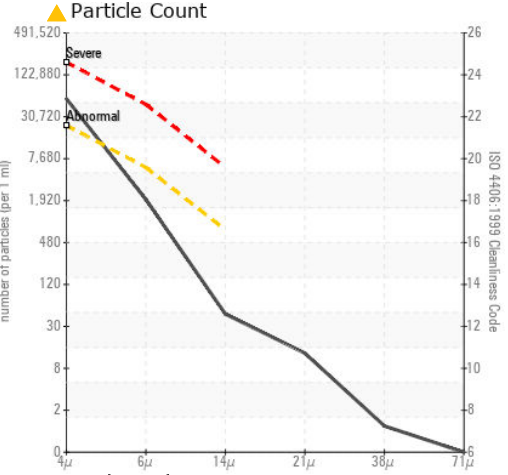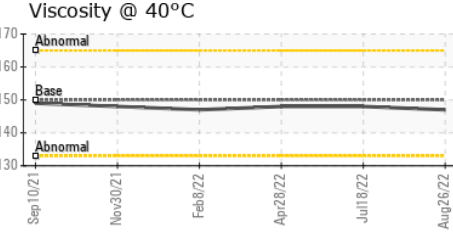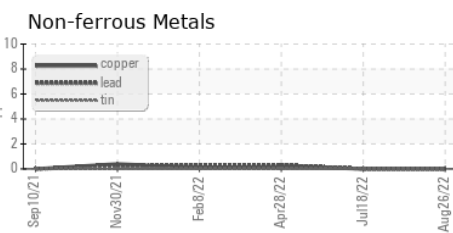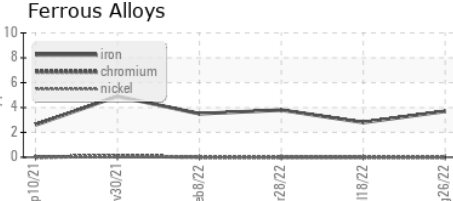

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0724707 **Received** : 30 Aug 2022  
**Lab Number** : 05630573 **Diagnosed** : 01 Sep 2022  
**Unique Number** : 10115094 **Diagnostician** : Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**AJINOMOTO USA**  
 4020 AJINOMOTO DRIVE  
 RALEIGH, NC  
 US 27610  
 Contact: BRENT FORSYTHE  
 FORSYTHEB@AJIUSA.COM  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)