

## **PROBLEM SUMMARY**

#### Machine Id 50638015 (S/N 13786) Component

Hydraulic System Fluid MOBIL DTE 24 (--- GAL)

#### COMPONENT CONDITION SUMMARY



#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |           |                   |  |  |  |  |  |  |
|--------------------------|--------------|-----------|-------------------|--|--|--|--|--|--|
| Sample Status            |              |           | ABNORMAL          |  |  |  |  |  |  |
| Particles >4µm           | ASTM D7647   | >5000     | 🔺 13463           |  |  |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >19/17/14 | <b>A</b> 21/16/10 |  |  |  |  |  |  |


#### Customer Id: TECGRENC Sample No.: WC0731044 Lab Number: 05651434 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

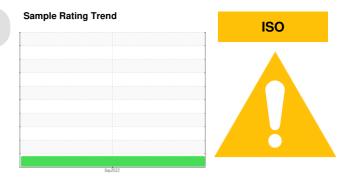

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

#### Machine Id 50638015 (S/N 13786) Component

Hydraulic System Fluid MOBIL DTE 24 (--- GAL)

#### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM    | MATION   | method       | limit/base | current           | history1 | history2 |
|------------------|----------|--------------|------------|-------------------|----------|----------|
| Sample Number    |          | Client Info  |            | WC0731044         |          |          |
| Sample Date      |          | Client Info  |            | 26 Sep 2022       |          |          |
| Machine Age      | hrs      | Client Info  |            | 0                 |          |          |
| Oil Age          | hrs      | Client Info  |            | 0                 |          |          |
| Oil Changed      |          | Client Info  |            | N/A               |          |          |
| Sample Status    |          |              |            | ABNORMAL          |          |          |
| WEAR METALS      |          | method       | limit/base | current           | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >20        | 2                 |          |          |
| Chromium         | ppm      | ASTM D5185m  | >20        | 0                 |          |          |
| Nickel           | ppm      | ASTM D5185m  | >20        | 0                 |          |          |
| Titanium         | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Silver           | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >20        | <1                |          |          |
| Lead             | ppm      | ASTM D5185m  | >20        | 6                 |          |          |
| Copper           | ppm      | ASTM D5185m  | >20        | 26                |          |          |
| Tin              | ppm      | ASTM D5185m  | >20        | <1                |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0                 |          |          |
|                  | le le    |              | 11 11 11   |                   |          |          |
| ADDITIVES        |          | method       | limit/base | current           | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 4                 |          |          |
| Barium           | ppm      | ASTM D5185m  |            | 3                 |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 7                 |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | <1                |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 22                |          |          |
| Calcium          | ppm      | ASTM D5185m  |            | 204               |          |          |
| Phosphorus       | ppm      | ASTM D5185m  |            | 497               |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 728               |          |          |
| Sulfur           | ppm      | ASTM D5185m  |            | 4639              |          |          |
| CONTAMINANTS     | 6        | method       | limit/base | current           | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >15        | 2                 |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 2                 |          |          |
| FLUID CLEANLIN   | IESS     | method       | limit/base | current           | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   | >5000      | <b>1</b> 3463     |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | 548               |          |          |
| Particles >14µm  |          | ASTM D7647   | >160       | 6                 |          |          |
| Particles >21µm  |          | ASTM D7647   | >40        | 2                 |          |          |
| Particles >38µm  |          | ASTM D7647   | >10        | 1                 |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0                 |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >19/17/14  | <b>A</b> 21/16/10 |          |          |
| FLUID DEGRADA    | ATION    | method       | limit/base | current           | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   |            | 0.76              |          |          |
|                  |          |              |            |                   |          |          |



# **OIL ANALYSIS REPORT**

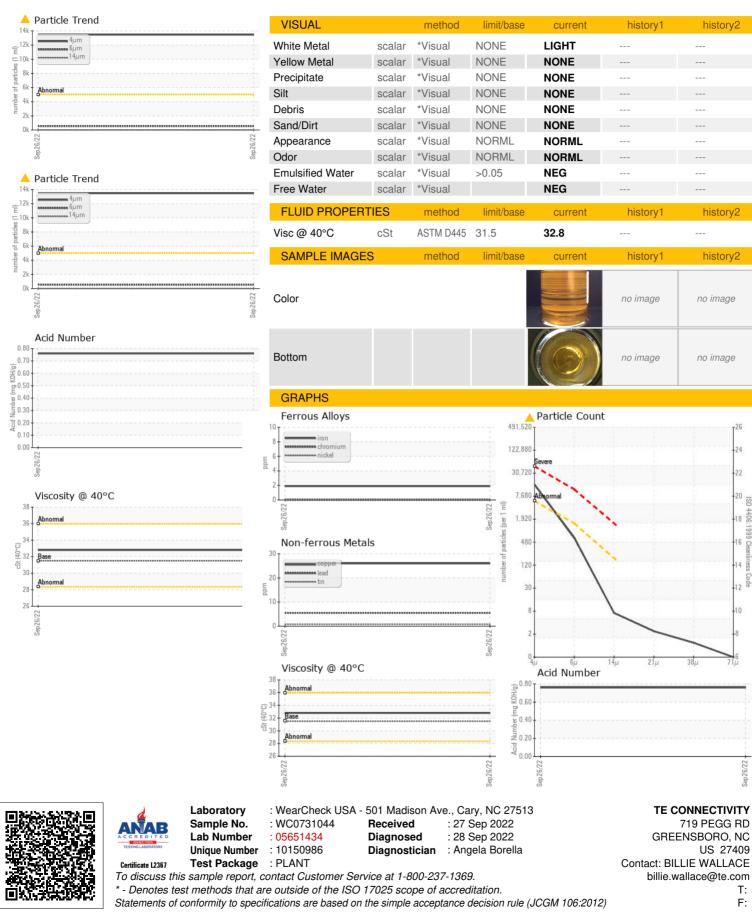

Contact/Location: BILLIE WALLACE - TECGRENC