



# **PROBLEM SUMMARY**

### Machine Id 48192691 (S/N R-09009) Component

Hydraulic System Fluid MOBIL DTE 24 (--- GAL)

### COMPONENT CONDITION SUMMARY

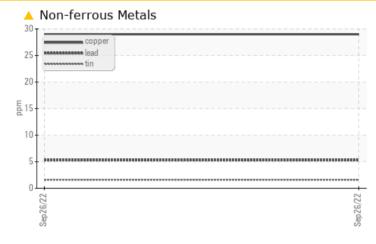

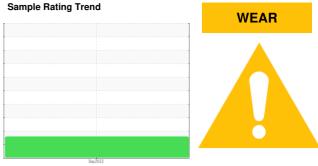

# Ferrous Alloys

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Sample Status				ABNORMAL	 
Iron	ppm	ASTM D5185m	>20	🔺 57	 
Copper	ppm	ASTM D5185m	>20	<u> </u>	 

Customer Id: TECGRENC Sample No.: WC0731058 Lab Number: 05651443 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

WEAR

### Machine Id 48192691 (S/N R-09009) Component

Hydraulic System Fluid MOBIL DTE 24 (--- GAL)

### DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### 📥 Wear

The iron level is abnormal. The copper level is abnormal.

### Contamination

The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0731058		
Sample Date		Client Info		26 Sep 2022		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>5</b> 7		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	5		
Copper	ppm	ASTM D5185m		<u> </u>		
Tin	ppm	ASTM D5185m	>20	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES	1- 1-	method	limit/base	ourropt	history1	history
			IIIII/base	current	nistory i	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		3		
Molybdenum	ppm	ASTM D5185m		1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		10		
Calcium	ppm	ASTM D5185m		168		
Phosphorus	ppm	ASTM D5185m		460		
Zinc	ppm	ASTM D5185m		675		
Sulfur	ppm	ASTM D5185m		5980		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	674		
Particles >6µm		ASTM D7647	>1300	86		
Particles >14µm		ASTM D7647	>160	6		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



particles (per 1

# **OIL ANALYSIS REPORT**



\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: BILLIE WALLACE - TECGRENC

719 PEGG RD

US 27409

T:

F:

history2

historv2

history2

no image

no image

4406

:1999 Cle

14