


PROBLEM SUMMARY

Machine Id 50499519 (S/N 13662) Component

Hydraulic System Fluid MOBIL DTE 24 (--- GAL)

COMPONENT CONDITION SUMMARY

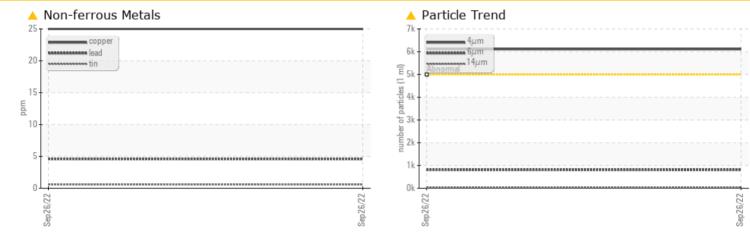

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | ABNORMAL | | | | | | |
|-----------------|-----|--------------|-----------|-------------------|--|--|--|--|--|--|
| Copper | ppm | ASTM D5185m | >20 | <u> </u> | | | | | | |
| Particles >4µm | | ASTM D7647 | >5000 | <u> </u> | | | | | | |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | A 20/17/12 | | | | | | |


Customer Id: TECGRENC Sample No.: WC0731073 Lab Number: 05651444 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

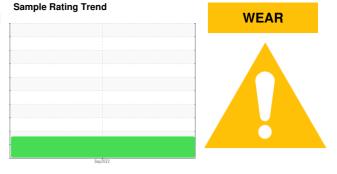

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Machine Id 50499519 (S/N 13662) Component

Hydraulic System Fluid MOBIL DTE 24 (--- GAL)

DIAGNOSIS

A Recommendation

Resample at the next service interval to monitor.

A Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|---|-------------------|---|--|---|----------------------------------|----------------------------------|
| Sample Number | | Client Info | | WC0731073 | | |
| Sample Date | | Client Info | | 26 Sep 2022 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 7 | | |
| Chromium | ppm | ASTM D5185m | >20 | 0 | | |
| Nickel | ppm | ASTM D5185m | >20 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >20 | <1 | | |
| Lead | ppm | ASTM D5185m | >20 | 5 | | |
| Copper | ppm | ASTM D5185m | >20 | <u> </u> | | |
| Tin | ppm | ASTM D5185m | >20 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 2 | | |
| Molybdenum | ppm | ASTM D5185m | | 1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 17 | | |
| Calcium | ppm | ASTM D5185m | | 98 | | |
| Phosphorus | ppm | ASTM D5185m | | 334 | | |
| Zinc | ppm | ASTM D5185m | | 490 | | |
| Sulfur | ppm | ASTM D5185m | | 1004 | | |
| CONTAMINANTS | | | | 1624 | | |
| | i. | method | limit/base | 1624 current | history1 | history2 |
| Silicon | ppm | | limit/base | - | | |
| Silicon Sodium | | | | current | | history2 |
| | ppm | ASTM D5185m | >15 | current 1 | history1 | history2 |
| Sodium | ppm ppm ppm | ASTM D5185m ASTM D5185m | >15 | current 1 0 | history1 | history2 |
| Sodium Potassium | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | >15 >20 | current 1 0 1 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method | >15 >20 limit/base | current 1 0 1 current | history1 history1 | history2 history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 | >15 >20 limit/base >5000 | current 1 0 1 current 6110 | history1 history1 | history2 history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 | >15 >20 limit/base >5000 >1300 >160 | current 1 0 1 current ▲ 6110 811 | history1 history1 | history2 history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 | >15 >20 limit/base >5000 >1300 >160 | current 1 0 1 current ▲ 6110 811 31 | history1 history1 | history2 history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >15 >20 limit/base >5000 >1300 >160 >40 | current 1 0 1 current ▲ 6110 811 31 4 | history1 history1 | history2 history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >15 >20 limit/base >5000 >1300 >160 >40 >10 | current 1 0 1 current ▲ 6110 811 31 4 0 | history1 history1 | history2 history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm ESS | ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >15 >20 limit/base >5000 >1300 >160 >40 >10 >3 | current 1 0 1 current ▲ 6110 811 31 4 0 0 0 0 0 0 0 0 0 0 | history1 history1 | history2 history2 |



OIL ANALYSIS REPORT

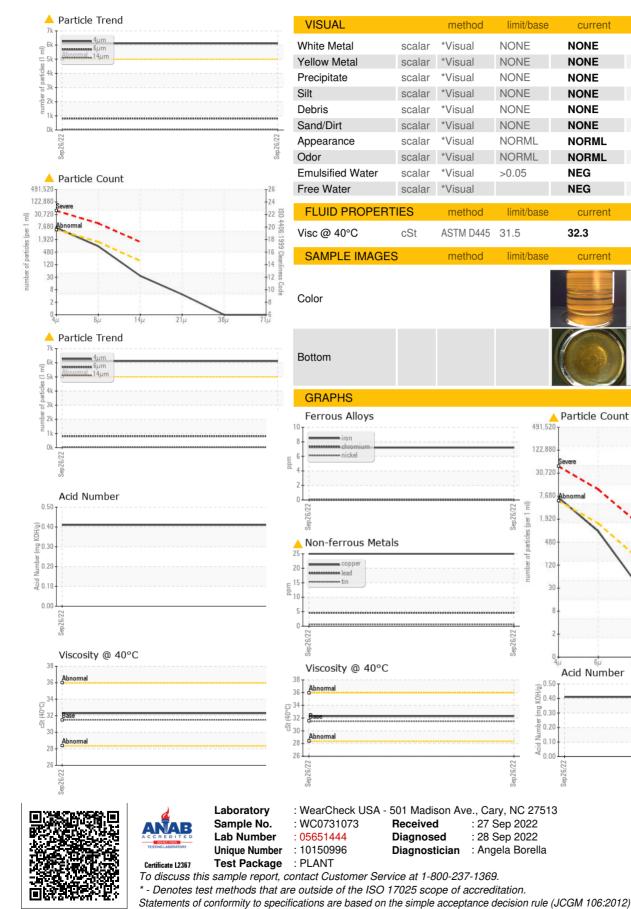

Contact/Location: BILLIE WALLACE - TECGRENC

history1

history

history1

no image

no image

214

history2

history2

history2

no image

no imade

4406

:1999 Cle

14

TE CONNECTIVITY

GREENSBORO, NC

billie.wallace@te.com

Contact: BILLIE WALLACE

719 PEGG RD

US 27409

T:

F: