




# PROBLEM SUMMARY

## Sample Rating Trend

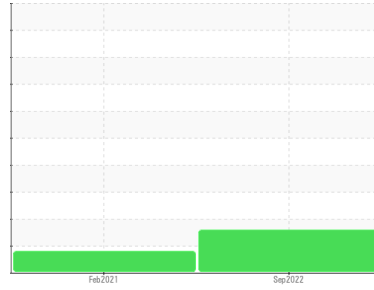


ISO



Machine Id  
**625463**  
 Component  
**Hydraulic System**  
 Fluid  
**LE 6146 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

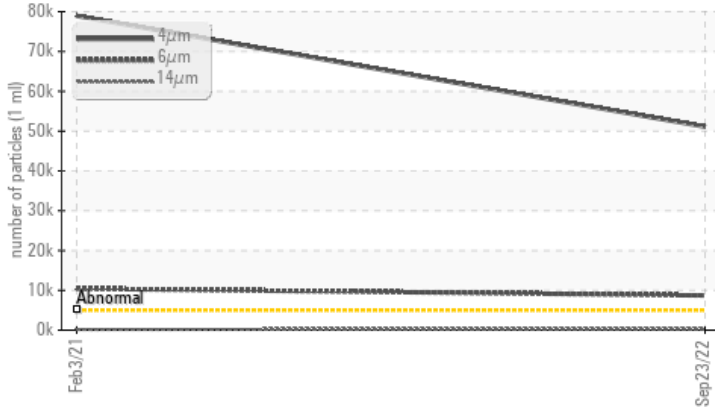

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	ABNORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ <b>51095</b>	▲ 78948	---
Particles >6µm	ASTM D7647	>1300	▲ <b>8699</b>	▲ 10424	---
Particles >14µm	ASTM D7647	>160	▲ <b>279</b>	153	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>23/20/15</b>	▲ 23/21/14	---

Customer Id: OWEDAL  
 Sample No.: WC0550895  
 Lab Number: 05652606  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS

03 Feb 2021 Diag: Don Baldrige

ISO



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

## Sample Rating Trend

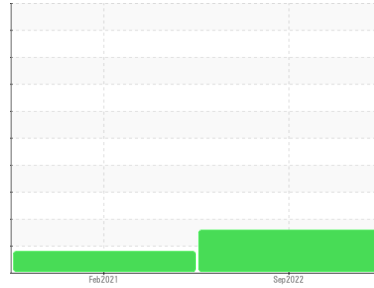

ISO



Machine Id  
**625463**  
 Component  
**Hydraulic System**  
 Fluid  
**LE 6146 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0550895</b>	WC05179597	---
Sample Date	Client Info	<b>23 Sep 2022</b>	03 Feb 2021	---
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>ABNORMAL</b>	ABNORMAL	---

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>&lt;1</b>	2
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0
Silver	ppm	ASTM D5185m	<b>0</b>	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	<1
Lead	ppm	ASTM D5185m >20	<b>0</b>	<1
Copper	ppm	ASTM D5185m >20	<b>0</b>	<1
Tin	ppm	ASTM D5185m >20	<b>0</b>	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	<1
Barium	ppm	ASTM D5185m	<b>0</b>	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1
Magnesium	ppm	ASTM D5185m	<b>0</b>	0
Calcium	ppm	ASTM D5185m	<b>43</b>	46
Phosphorus	ppm	ASTM D5185m	<b>333</b>	328
Zinc	ppm	ASTM D5185m	<b>398</b>	428
Sulfur	ppm	ASTM D5185m	<b>946</b>	1447

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>0</b>	0
Sodium	ppm	ASTM D5185m	<b>0</b>	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0

### FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 51095</b>	▲ 78948
Particles >6µm	ASTM D7647	>1300	<b>▲ 8699</b>	▲ 10424
Particles >14µm	ASTM D7647	>160	<b>▲ 279</b>	153
Particles >21µm	ASTM D7647	>40	<b>41</b>	17
Particles >38µm	ASTM D7647	>10	<b>2</b>	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 23/20/15</b>	▲ 23/21/14

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.47</b>	0.377




# OIL ANALYSIS REPORT

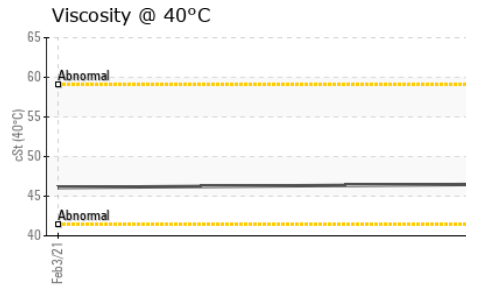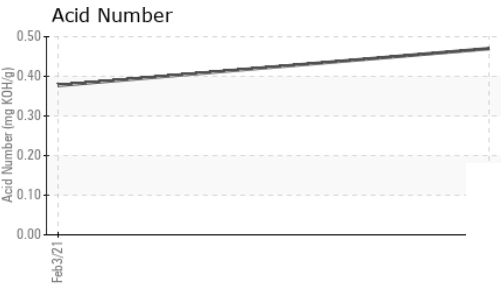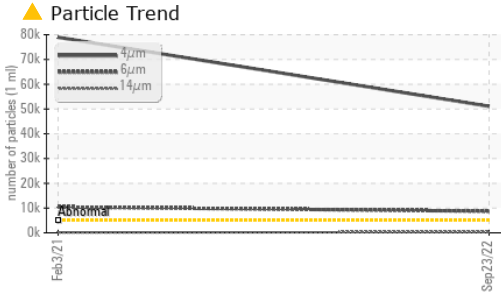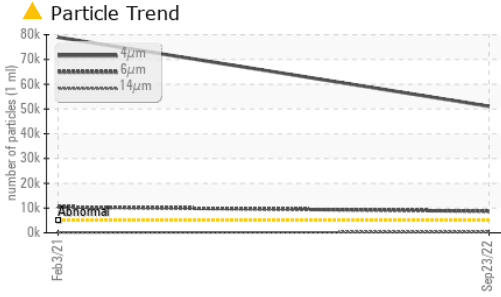






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.5	46.1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

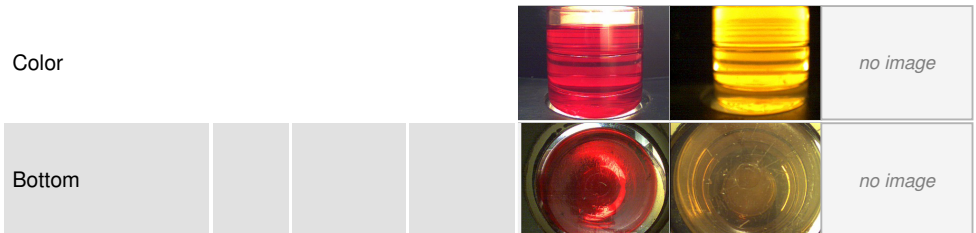

## GRAPHS

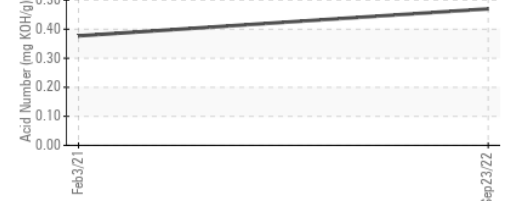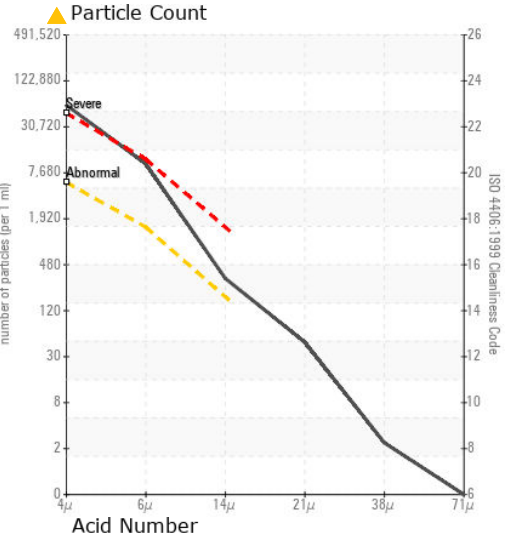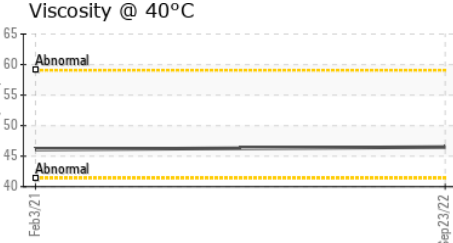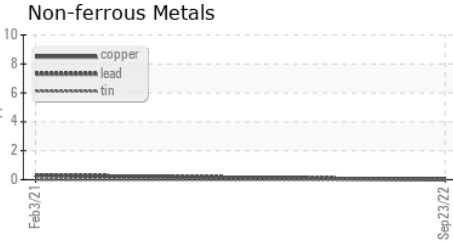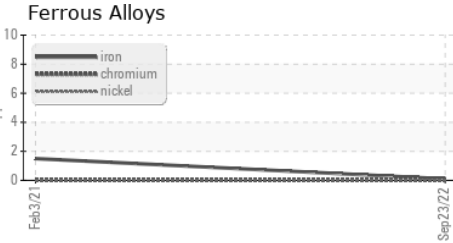

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0550895 **Received** : 28 Sep 2022  
**Lab Number** : 05652606 **Diagnosed** : 29 Sep 2022  
**Unique Number** : 10152158 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**OWENS CORNING LLC - GASTONIA**  
 1230 GASTONIA TECH PKWY  
 DALLAS, NC  
 US 28034  
 Contact: KYLE WISHLINSKI  
 kyle.wishlinski@owenscorning.com  
 T: (704)691-6195  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)