


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



FES SB-2 - 19L128V (S/N 96011032)

Refrigeration Compressor

CAMCO 717 HT (70 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jun201	3 Nov2017	Oct2018 S	ep2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0733877	WCI2342734	WCI2311016
Sample Date		Client Info		19 Sep 2022	10 Oct 2018	02 Nov 2017
Machine Age	hrs	Client Info		17640	10196	7903
Oil Age	hrs	Client Info		17640	10196	50000
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	1	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	0
Zinc	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m		26	10	5
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	3	2	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.01	0.002	0.003	0.002
ppm Water	ppm	ASTM D6304	>100	15.5	30	20
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	2068	4624	1909
Particles >6µm		ASTM D7647	>2500	235	611	313
Particles >14μm		ASTM D7647	>320	7	24	13
Particles >21μm		ASTM D7647	>80	2	6	5
Particles >38µm		ASTM D7647	>20	0	0	3
Particles >71µm		ASTM D7647	>4	0	0	3
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/10	19/16/12	18/15/11
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	та КОЦ/а	ACTM DOZA	0.007	0.014	0.007	0.007



OIL ANALYSIS REPORT

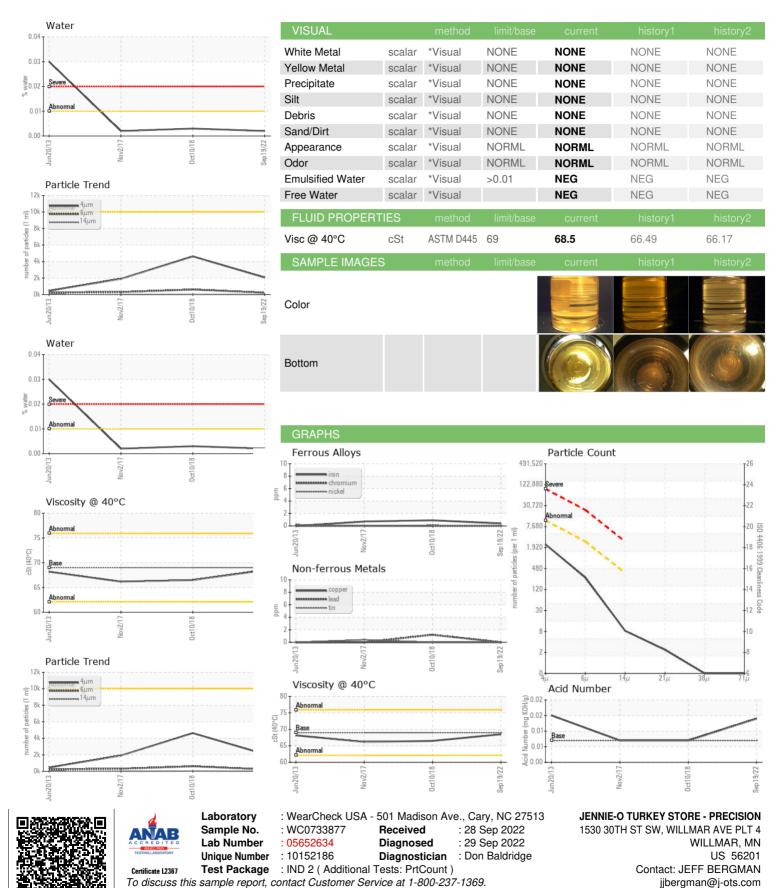

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (320)231-7148 F: (320)231-7169