


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id KAESER SFC 37 6484309 (S/N 1137)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug2019	Apr2020	Sep2020 Sep2021	Sep2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP49093	KCP39107	KCP29709
Sample Date		Client Info		27 Sep 2022	29 Sep 2021	29 Sep 2020
Machine Age	hrs	Client Info		37405	28706	19947
Oil Age	hrs	Client Info		8699	8780	3660
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	10	7	10
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	10
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	1	4
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	2
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		15621	11032	15060
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		<1	<1	2
Potassium	ppm					
	ppiii	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D5185m ASTM D6304	>20	0 0.010	<1 0.006	0.009
	% ppm	ASTM D6304	>0.05	0.010	0.006	0.009
ppm Water FLUID CLEANLIN	% ppm	ASTM D6304 ASTM D6304	>0.05 >500	0.010 107.1 current 552	0.006 60.8	0.009 92.2
ppm Water FLUID CLEANLIN Particles >4μm Particles >6μm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base	0.010 107.1 current	0.006 60.8 history1	0.009 92.2 history2
ppm Water FLUID CLEANLIN Particles >4μm Particles >6μm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	0.010 107.1 current 552 82 8	0.006 60.8 history1 2480 691 49	0.009 92.2 history2 12395
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0.010 107.1 current 552 82	0.006 60.8 history1 2480 691	0.009 92.2 history2 12395 • 4937
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0.010 107.1 current 552 82 8	0.006 60.8 history1 2480 691 49	0.009 92.2 history2 12395 \$\triangle 4937\$ \$\triangle 657\$
ppm Water FLUID CLEANLIN Particles >4 Particles >6 Particles >14 Particles >21 Particles >21	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0.010 107.1 current 552 82 8	0.006 60.8 history1 2480 691 49	0.009 92.2 history2 12395 ▲ 4937 ▲ 657 ▲ 209
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	% ppm	ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0.010 107.1 current 552 82 8 2	0.006 60.8 history1 2480 691 49 12	0.009 92.2 history2 12395 4937 657 209 8



OIL ANALYSIS REPORT

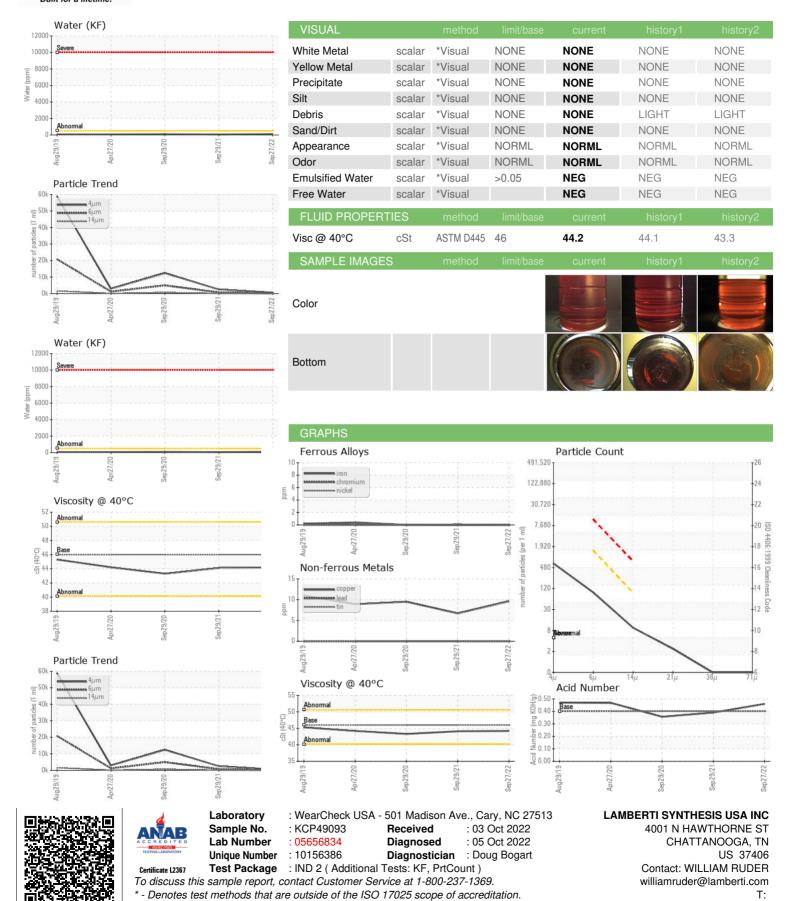

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: