


PROBLEM SUMMARY

KAESER SK 19 1580236 (S/N 1214)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

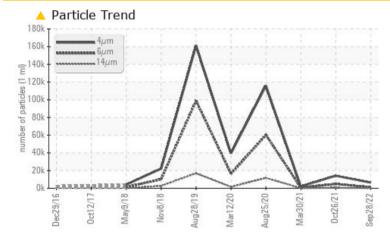

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status		ATTENTION	ABNORMAL	ATTENTION		
Particles >14µm	ASTM D7647 >80	<u> </u>	6 501	8 7		
Oil Cleanliness	ISO 4406 (c) >/17	/13 🔺 20/17/14	1 9/16	1 6/14		


Customer Id: WARWARMO Sample No.: KCP49247 Lab Number: 05664151 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

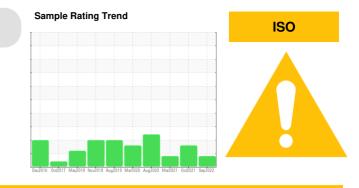

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



26 Oct 2021 Diag: Don Baldridge

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



30 Mar 2021 Diag: Angela Borella



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

25 Aug 2020 Diag: Don Baldridge



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



view report

view report





OIL ANALYSIS REPORT

Machine Id KAESER SK 19 1580236 (S/N 1214) Component

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

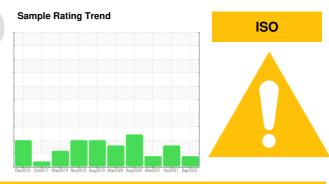

0	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP49247	KCP36158	KCP37245
Sample Date		Client Info		28 Sep 2022	26 Oct 2021	30 Mar 2021
Machine Age	hrs	Client Info		32990	31225	30171
Oil Age	hrs	Client Info		0	2000	1060
Oil Changed		Client Info		Changed	N/A	Not Changd
Sample Status				ATTENTION	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	2	2	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m	90	4	0	20
Molybdenum	ppm	ASTM D5185m	50	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	75	66	79
Calcium	ppm	ASTM D5185m		2	0	2
Phosphorus	ppm	ASTM D5185m	L	6	0	4
Zinc	ppm	ASTM D5185m		9	0	0
Sulfur	ppm	ASTM D5185m		23133		0
	ppm	AGTIVI DJ TOJITI			15800	16553
			11 1. 1		15899	16553
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	limit/base >25	current <1	history1 0	history2 0
Silicon Sodium		ASTM D5185m ASTM D5185m	>25	current <1 21	history1 0 19	history2 0 20
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	current <1 21 3	history1 0 19 2	history2 0 20 2
Silicon Sodium Potassium Water	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<pre>current <1 21 3 0.019</pre>	history1 0 19 2 0.031	history2 0 20 2 0.030
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20 >0.05	current <1 21 3	history1 0 19 2	history2 0 20 2
Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<pre>current <1 21 3 0.019</pre>	history1 0 19 2 0.031	history2 0 20 2 0.030
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	<pre>current <1 21 3 0.019 190.1</pre>	history1 0 19 2 0.031 318.8	history2 0 20 2 0.030 308.7
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05 >500 limit/base	current <1 21 3 0.019 190.1 current	history1 0 19 2 0.031 318.8 history1	history2 0 20 2 0.030 308.7 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647	>25 >20 >0.05 >500 limit/base	current <1 21 3 0.019 190.1 current 6415	history1 0 19 2 0.031 318.8 history1 14085	history2 0 20 2 0.030 308.7 history2 2060
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	current <1 21 3 0.019 190.1 current 6415 1079	history1 0 19 2 0.031 318.8 history1 14085 ▲ 4778	history2 0 20 2 0.030 308.7 history2 2060 634
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	Current <1 21 3 0.019 190.1 Current 6415 1079 ▲ 81	history1 0 19 2 0.031 318.8 history1 14085 4778 501	history2 0 20 2 0.030 308.7 history2 2060 634 ₹7
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	Current <1 21 3 0.019 190.1 Current 6415 1079 ▲ 81 15	history1 0 19 2 0.031 318.8 history1 14085 4778 501 144	history2 0 20 2 0.030 308.7 history2 2060 634 87 30
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	 <1 21 3 0.019 190.1 current 6415 1079 & 81 15 1 	history1 0 19 2 0.031 318.8 ► history1 14085 ▲ 4778 ▲ 501 ▲ 144 ▲ 5	history2 0 20 2 0.030 308.7 history2 2060 634 ▲ 87 ▲ 30 1
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 METHOD ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 21 3 0.019 190.1 current 6415 1079 ▲ 81 15 1 0	history1 0 19 2 0.031 318.8 history1 14085 ▲ 4778 ▲ 501 ▲ 144 ▲ 5 0	history2 0 20 2 0.030 308.7 history2 2060 634 ▲ 87 ▲ 30 1 0


Report Id: WARWARMO [WUSCAR] 05664151 (Generated: 11/30/2023 13:17:27) Rev: 1


Contact/Location: PAM ? - WARWARMO


Page 3 of 4




OIL ANALYSIS REPORT

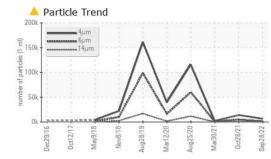

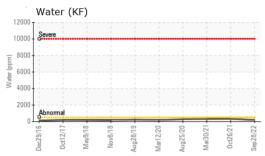

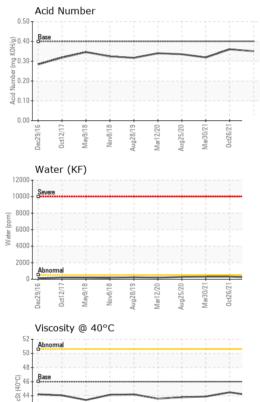




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.0	44.5	43.9
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						



Bottom

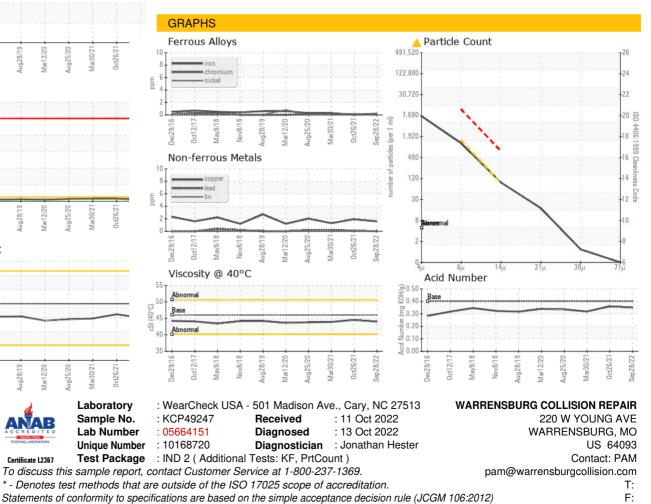

Certificate L2367

Contact/Location: PAM ? - WARWARMO