




FUEL REPORT

Sample Rating Trend

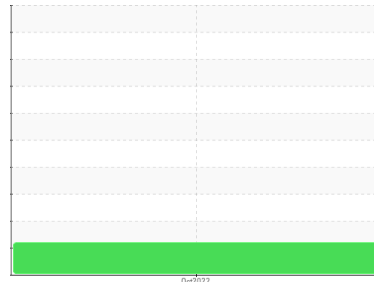

ISO



Machine Id
KIOTI Harvey
 Component
Diesel Fuel
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is a moderate amount of particulates present in the fuel. The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KT0000217	---	---
Sample Date	Client Info	10 Oct 2022	---	---
Machine Age	hrs Client Info	272	---	---
Sample Status		ATTENTION	---	---

PHYSICAL PROPERTIES

method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298	0.839	---	---
Fuel Color	text *Visual Screen	Red	---	---
ASTM Color	scalar *ASTM D1500	1.5	---	---
Visc @ 40°C	cSt ASTM D445	2.39	---	---
Pensky-Martens Flash Point	°C *PMCC Calculated	61	---	---

SULFUR CONTENT

method	limit/base	current	history1	history2
Sulfur	ppm ASTM D5185m	8	---	---
Sulfur (UVF)	ppm ASTM D5453	8	---	---

DISTILLATION

method	limit/base	current	history1	history2
Initial Boiling Point	°C ASTM D86	162	---	---
5% Distillation Point	°C ASTM D86	189	---	---
10% Distill Point	°C ASTM D86	200	---	---
15% Distillation Point	°C ASTM D86	208	---	---
20% Distill Point	°C ASTM D86	216	---	---
30% Distill Point	°C ASTM D86	230	---	---
40% Distill Point	°C ASTM D86	243	---	---
50% Distill Point	°C ASTM D86	256	---	---
60% Distill Point	°C ASTM D86	270	---	---
70% Distill Point	°C ASTM D86	285	---	---
80% Distill Point	°C ASTM D86	301	---	---
85% Distillation Point	°C ASTM D86	311	---	---
90% Distill Point	°C ASTM D86	323	---	---
95% Distillation Point	°C ASTM D86	341	---	---
Final Boiling Point	°C ASTM D86	352	---	---
Distillation Residue	% ASTM D86	1.4	---	---
Distillation Loss	% ASTM D86	0.4	---	---

IGNITION QUALITY






method	limit/base	current	history1	history2
API Gravity	ASTM D7777	37.2	---	---
Cetane Index	ASTM D4737 <40.0	47.8	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m <1.0	<1	---	---
Sodium	ppm ASTM D5185m <0.1	0	---	---
Potassium	ppm ASTM D5185m <0.1	0	---	---
Water	% ASTM D6304 <0.05	0.003	---	---
ppm Water	ppm ASTM D6304 <500	34.9	---	---
% Gasoline	% *In-House <0.50	0.0	---	---
% Biodiesel	% *In-House <20.0	0.0	---	---



FUEL REPORT

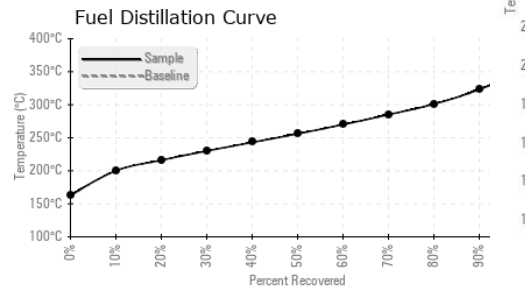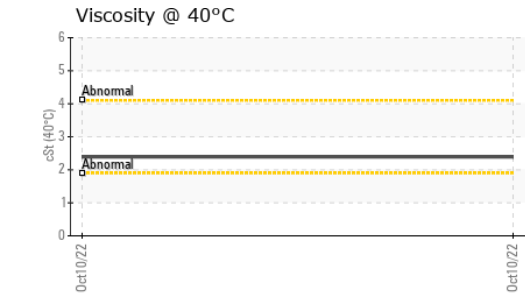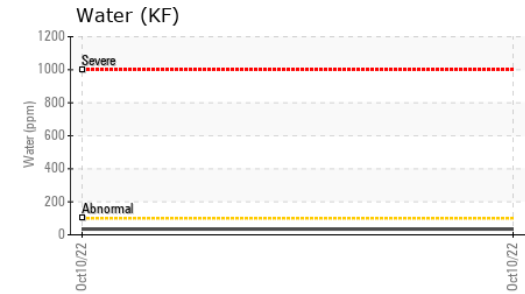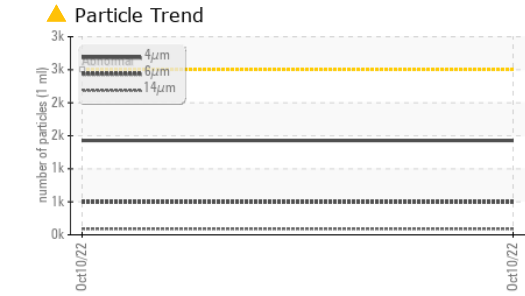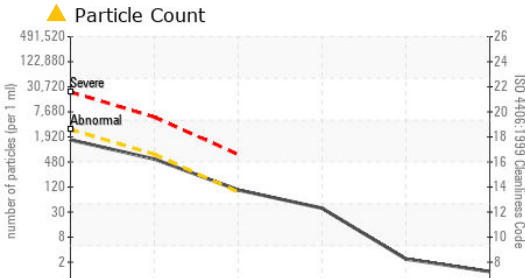


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	1428	---	---
Particles >6µm	ASTM D7647	>640	495	---	---
Particles >14µm	ASTM D7647	>80	▲ 90	---	---
Particles >21µm	ASTM D7647	>20	▲ 33	---	---
Particles >38µm	ASTM D7647	>4	2	---	---
Particles >71µm	ASTM D7647	>3	1	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 18/16/14	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	---	---
Nickel	ppm	ASTM D5185m <0.1	0	---	---
Lead	ppm	ASTM D5185m <0.1	0	---	---
Vanadium	ppm	ASTM D5185m <0.1	0	---	---
Iron	ppm	ASTM D5185m <0.1	0	---	---
Calcium	ppm	ASTM D5185m <0.1	0	---	---
Magnesium	ppm	ASTM D5185m <0.1	0	---	---
Phosphorus	ppm	ASTM D5185m <0.1	0	---	---
Zinc	ppm	ASTM D5185m <0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

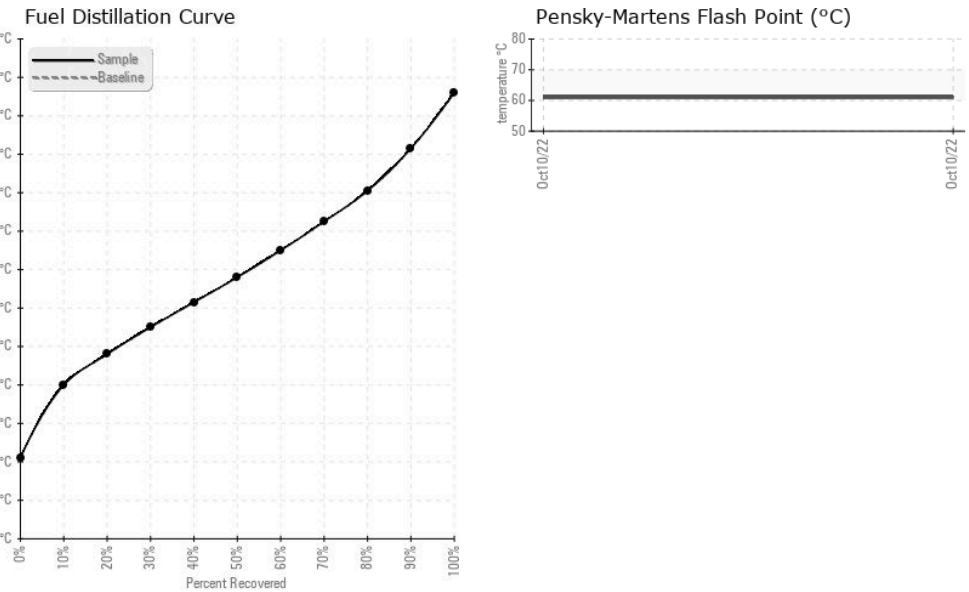

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0000217 **Received** : 18 Oct 2022
Lab Number : **05670155** **Diagnosed** : 20 Oct 2022
Unique Number : 10179725 **Diagnostician** : Doug Bogart
Test Package : DF-2 (Additional Tests: Screen)

ELLISVILLE AUTO SERVICE CENTER
 704 HILL STREET
 ELLISVILLE, MS
 US 39437
 Contact: CHIP LOONEY
 chiplooney@yahoo.com
 T: (601)800-8233
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)