

### **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

# RECOILER

#### Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 150 (--- GAL)

#### DIAGNOSIS

#### A Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2018	0ct2022		
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0701713	WCI2331265	
Sample Date		Client Info		08 Oct 2022	12 Apr 2018	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5	5	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	<1	
Aluminum	ppm	ASTM D5185m	>20	0	0	
Lead	ppm	ASTM D5185m	>20	0	1	
Copper	ppm	ASTM D5185m		1	<1	
Tin	ppm	ASTM D5185m	>20	0	0	
Antimony	ppm	ASTM D5185m	0		0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
	ррпі					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	4	2	
Barium	ppm	ASTM D5185m	5	1	0	
Molybdenum	ppm	ASTM D5185m	5	2	2	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	25	4	0	
Calcium	ppm	ASTM D5185m	200	44	44	
Phosphorus	ppm	ASTM D5185m	300	306	318	
Zinc	ppm	ASTM D5185m	370	146	107	
Sulfur	ppm	ASTM D5185m	2500	8091	8839	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	4	<1	
Sodium	ppm	ASTM D5185m		0	<1	
Potassium	ppm	ASTM D5185m	>20	2	<1	
Water	%	ASTM D6304	>0.05	NEG	NEG	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>A</b> 128654	120978	
Particles >6µm		ASTM D7647	>1300	<u> </u>	▲ 20883	
Particles >14µm		ASTM D7647	>160	69	<b>^</b> 254	
Particles >21µm		ASTM D7647	>40	10	25	
Particles >38µm		ASTM D7647	>10	2	0	
Particles >71µm		ASTM D7647	>3	1	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>A</b> 24/21/13	▲ 24/22/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.37	0.362	



Acid Number

1.00

## **OIL ANALYSIS REPORT**

method


limit/base


current

history1

history2

VISUAL



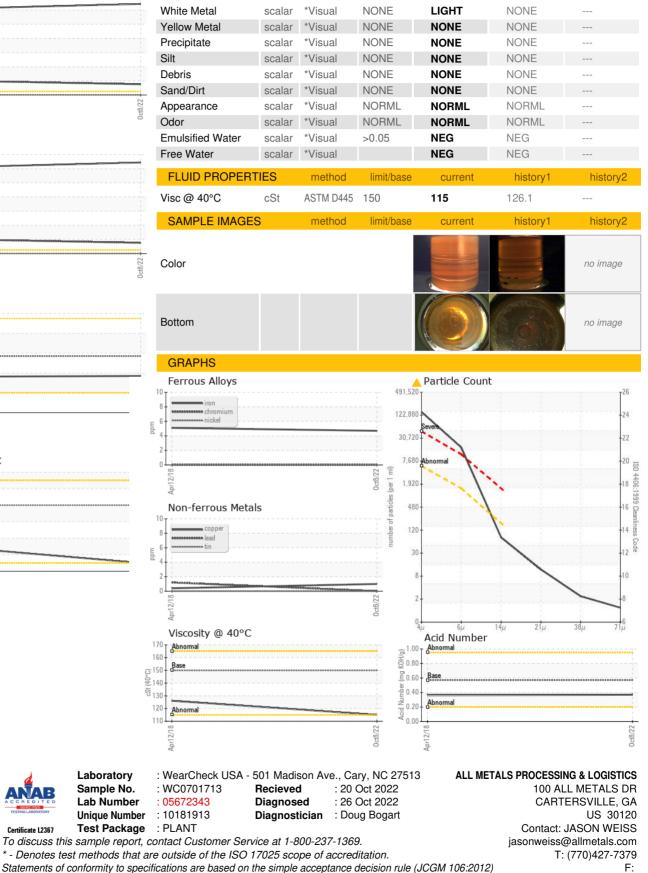

0.8 ₽0.6 E 0 40 Ab Pig 0.2 0.00 Viscosity @ 40°C 160 150 ()-0+) 140 150 130 120 Abnorma 110 Apr12/

Certificate L2367

Contact/Location: JASON WEISS - ALLCARGA