

OIL ANALYSIS REPORT

KAESER SK 20 7072880 (S/N 1193) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP46959D	KC103519	KC78790
Sample Date		Client Info		18 Oct 2022	18 Feb 2022	01 May 2020
Machine Age	hrs	Client Info		13818	10977	3367
Oil Age	hrs	Client Info		3000	3422	3367
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
						-
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m		0	2	<1
Lead	ppm	ASTM D5185m	>10	2	0	0
Copper	ppm	ASTM D5185m	>50	11	8	11
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	28	25	<1
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	16	<1	1
Zinc	ppm	ASTM D5185m	0	67	58	0
Sulfur	ppm	ASTM D5185m	23500	24234	16386	13417
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	<1
Sodium	ppm	ASTM D5185m		5	3	0
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.05	0.013	0.012	0.003
ppm Water	ppm	ASTM D6304	>500	137.5	129.6	31.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7047	15595	6253
Particles >6µm		ASTM D7647	>1300	1821	▲ 5572	1 2147
Particles >14µm		ASTM D7647	>80	▲ 101	▲ 414	31
Particles >21µm		ASTM D7647		24	▲ 66	12
Particles >38µm		ASTM D7647	>4	1	4	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	▲ 20/18/14	▲ 20/16	▲ 18/12
		()				
FLUID DEGRADA		method			history1	history2

mg KOH/g ASTM D8045 1.0 Acid Number (AN)

Report Id: SPEBES [WUSCAR] 05675077 (Generated: 02/22/2024 06:44:29) Rev: 1

0.35 0.36

Contact/Location: C. FITZGERALD - SPEBES

0.574



OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

*Visual

*Visual

*Visua

*Visual

*Visual

*Visual

*Visual

*Visual

ASTM D445

scalar *Visual

scalar *Visual

NONE

NONE

NONE

NONE

NONE

NONE

NORML


NORML

>0.05


45

Particle Tren $\begin{bmatrix} 16k \\ 14k \end{bmatrix} = \begin{bmatrix} 4\mu m \\ 6\mu m \end{bmatrix}$	d	
12k 6μm 12k 14μm 8k 6k 0.00 6k		
4k - 2k - www.anden.www.www.anden.anden	NAMES OF A DATA DATA DATA DATA DATA DATA DATA D	CLASSING DESCRIPTION OF THE OWNER
0k 0k 071/ke W	Feb18/22 -	0ct18/22
Water (KF)		
0000 - Severe		



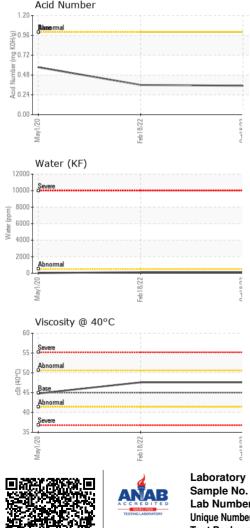

Sample No. Lab Number Unique Number : 10189648 Certificate L2367



* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NEG NEG NEG NEG NEG NEG 47.6 47.6 44.8

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

VLITE

NONE

NONE

NONE

VLITE

NONE

NORML

NORML

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

Bottom

Color

White Metal

Yellow Metal

Precipitate

Silt

Debris

Odor

Sand/Dirt

Appearance


Free Water

Visc @ 40°C

Emulsified Water

FLUID PROPERTIES

SAMPLE IMAGES

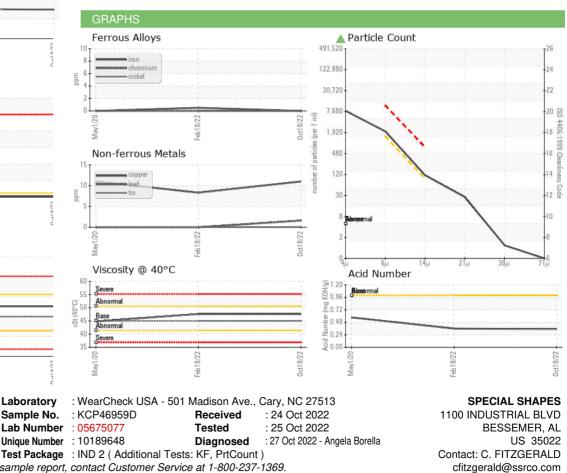

Contact/Location: C. FITZGERALD - SPEBES

T:

F: