




# OIL ANALYSIS REPORT

Sample Rating Trend

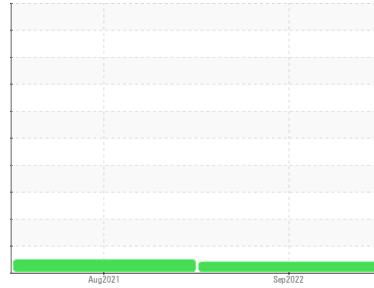

VISCOSITY



Machine Id  
**MCQUAY 4321 COLLINGTON RD CH 1 (S/N STM1060200229)**

Component  
**Refrigeration Compressor**

Fluid  
**REFRIG COMP OIL ISO 46 (--- GAL)**

## DIAGNOSIS

### ● Recommendation

Resample at the next service interval to monitor.

### ● Wear

All component wear rates are normal.

### ● Contamination

There is no indication of any contamination in the oil.

### ● Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0597105</b>	WC0597107	---
Sample Date	Client Info		<b>28 Sep 2022</b>	23 Aug 2021	---
Machine Age	hrs	Client Info	<b>695</b>	45830	---
Oil Age	hrs	Client Info	<b>695</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>ATTENTION</b>	NORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>0</b>	4	---
Chromium	ppm	ASTM D5185m	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >50	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	<b>4</b>	<1	---
Copper	ppm	ASTM D5185m >100	<b>1</b>	25	---
Tin	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Antimony	ppm	ASTM D5185m	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 5	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 5	<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m 12	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m 12	<b>19</b>	2	---
Zinc	ppm	ASTM D5185m 12	<b>0</b>	25	---
Sulfur	ppm	ASTM D5185m 1000	<b>0</b>	28	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>38</b>	5	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Water	%	ASTM D6304 >0.02	<b>0.005</b>	0.004	---
ppm Water	ppm	ASTM D6304 >250	<b>58.6</b>	40.3	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974 0.10	<b>0.028</b>	0.029	---

