



OIL ANALYSIS REPORT







NORMAL

Machine Id **A504 (S/N 6410-04)** Component

Wind Turbine Gearbox

MOBIL MOBILGEAR SHC XMP 320 (74 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI025115	MHI017703	MHI017466
Sample Date		Client Info		11 Oct 2022	19 Oct 2021	10 Dec 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		88259	82366	76818
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>200	12	18	16
Iron	ppm	ASTM D5185m		7	9	10
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m	>75	18	12	3
Tin	ppm	ASTM D5185m	210	0	<1	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ррш			U	-	-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	2	4	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	485	403	383	424
Zinc	ppm	ASTM D5185m	0	0	11	4
Sulfur	ppm	ASTM D5185m		4284	3503	3656
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	<1	<1	<1
Sodium	ppm	ASTM D5185m	>15	<1	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.1	0.014	0.005	0.003
ppm Water	ppm	ASTM D6304	>1000	148.7	50.9	29.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		224	340	144
Particles >6µm		ASTM D7647	>5000	58	95	70
Particles >14µm		ASTM D7647	>640	9	13	14
Particles >21µm		ASTM D7647	>160	4	4	5
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	15/13/10	16/14/11	14/13/11
		(-)			-	



Water (KF)

12000 10000 - Se 8000 -(udd) 6000 -2000 - Ab

Mar29/1

Mar29/1

150k 100k 50k 0ct21/14

Particle Trend

OIL ANALYSIS REPORT

0ct19/21

0ct19/21


Color


Bottom


r+14/20

r+14/20

FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	1.29	1.295	1.212
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	335	343	339	332
SAMPLE IMAGES		method	limit/base	current	history1	history2





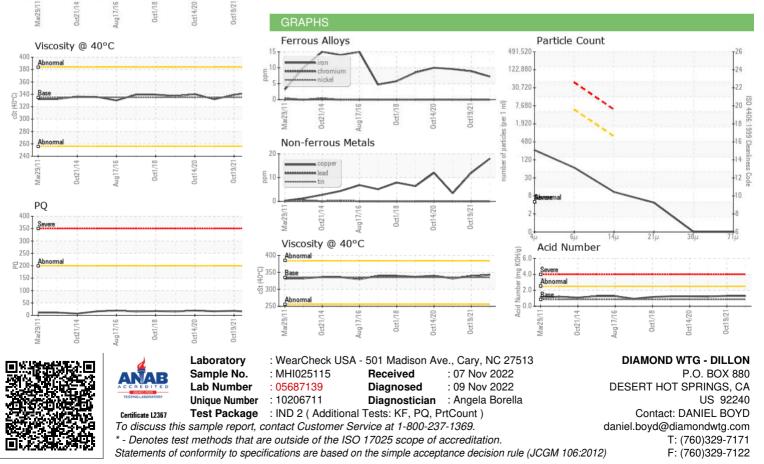

Contact/Location: DANIEL BOYD - DIADIL