




OIL ANALYSIS REPORT

Sample Rating Trend

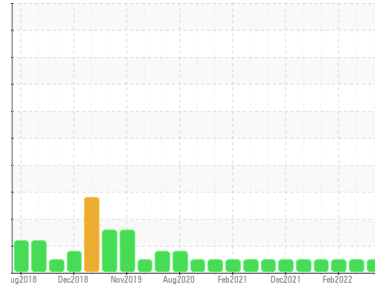

NORMAL



Area
GUAY SON [CONHER]
 Machine Id
IBACO BM LOPEZ VENTURA
 Component
Diesel Engine
 Fluid
XTRA REV 15W40 (160 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0011207	KL0009205	KL0009086
Sample Date	Client Info			31 Oct 2022	23 Mar 2022	21 Feb 2022
Machine Age	hrs	Client Info		17228	16737	16697
Oil Age	hrs	Client Info		2581	16737	1525
Oil Changed	Client Info			Changed	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	75	57	51
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	5	4	4
Lead	ppm	ASTM D5185m	>40	4	2	2
Copper	ppm	ASTM D5185m	>330	15	13	13
Tin	ppm	ASTM D5185m	>15	2	2	1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		43	118	115
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		105	110	111
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		485	591	552
Calcium	ppm	ASTM D5185m		1663	1704	1571
Phosphorus	ppm	ASTM D5185m		807	961	933
Zinc	ppm	ASTM D5185m		988	1115	1105
Sulfur	ppm	ASTM D5185m		3840	3071	2850

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	20	20	21
Sodium	ppm	ASTM D5185m		5	5	4
Potassium	ppm	ASTM D5185m	>20	<1	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.7	2	1.9
Nitration	Abs/cm	*ASTM D7624	>20	9.9	11.0	10.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	28.8	28.1



OIL ANALYSIS REPORT

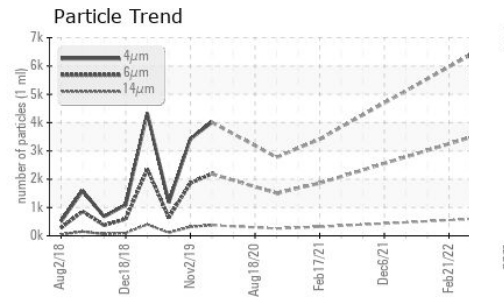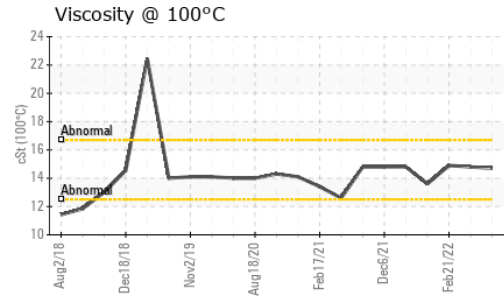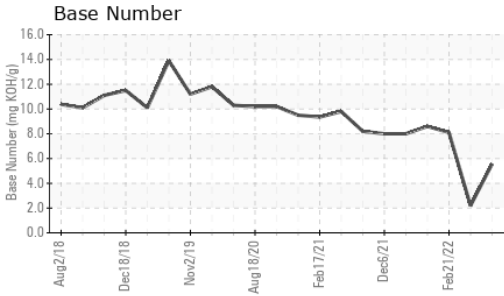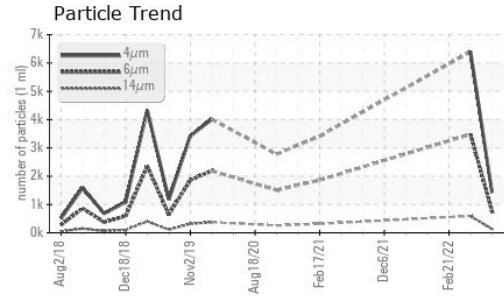






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1427	6394	---
Particles >6µm	ASTM D7647	>5000	777	3483	---
Particles >14µm	ASTM D7647	>640	132	593	---
Particles >21µm	ASTM D7647	>160	45	200	---
Particles >38µm	ASTM D7647	>40	7	31	---
Particles >71µm	ASTM D7647	>10	1	3	---
Oil Cleanliness	ISO 4406 (c)	>19/16	17/14	19/16	---

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	19.2	19.1
Base Number (BN)	mg KOH/g	ASTM D2896		5.55	2.20	8.1

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445		14.7	14.8	14.9

GRAPHS

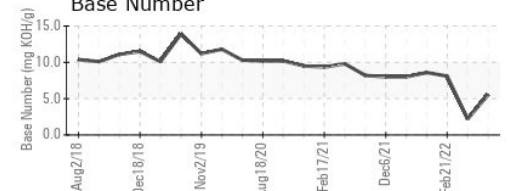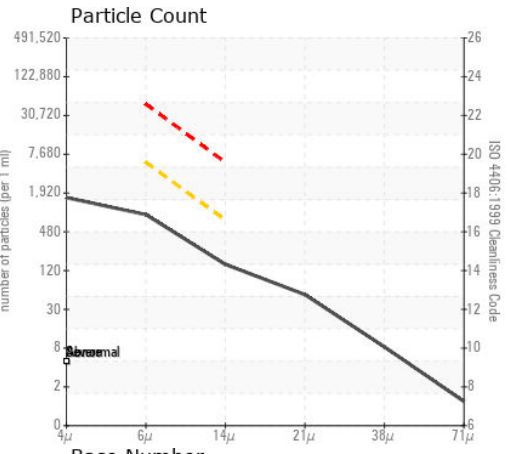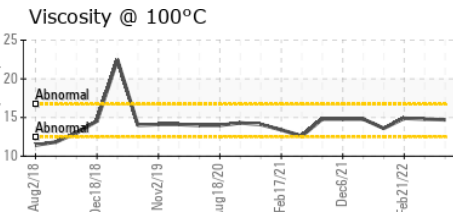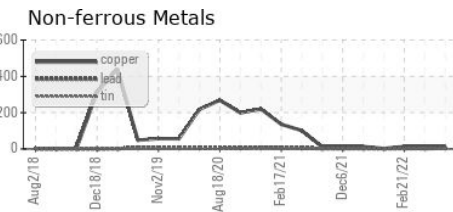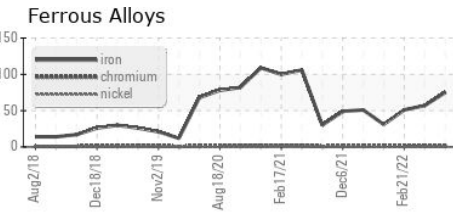

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0011207 **Received** : 08 Nov 2022
Lab Number : **05688026** **Diagnosed** : 10 Nov 2022
Unique Number : 10207598 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)